

Air Cylinder New

Large Bore Sizes $\varnothing 125, \varnothing 140, \varnothing 160$

27.2 kg

Weight

Reduced by Max. 58%

11.3 kg

CS1


CS2

Standard



- Lighter installation achieved by reducing weight.
- Die cast rod cover and head cover used to achieve greater weight reduction.
- Rod bore size changed to suit uses, achieving greater weight reduction.


CS1⇔CS2 Weight Comparison (Basic Type $\varnothing 160$ -100st)

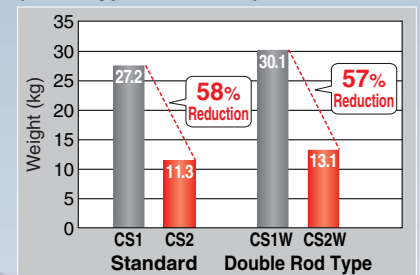


Maximum stroke when using rotating bracket

Expanded by 1.6 times (compared to series CS1)

Lighter cylinder reduces self-weight deflection.
Stroke range extended to widen use.




Maximum allowable stroke when using clevis bracket

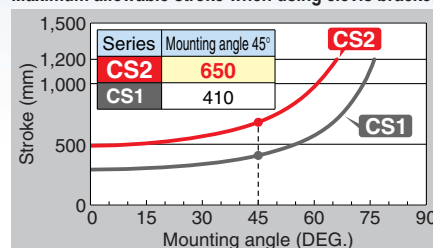

Allowable lateral load equal to Series CS1


Even if rod diameter is changed to suit various needs, function remains equal to Series CS1.

Allowable lateral load of CS1 and CS2

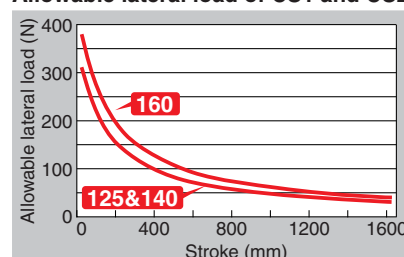


Series Expanded NEW
Double Rod Type, Smooth Cylinder
added to Series CS2!

9 Made to Order types added!

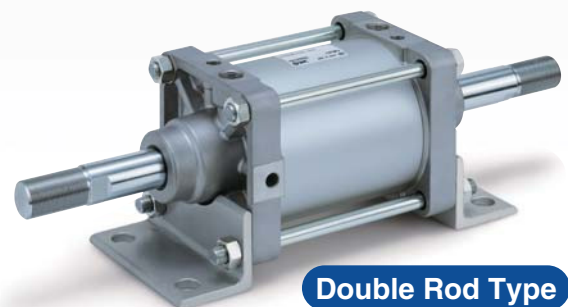

Double Rod Type

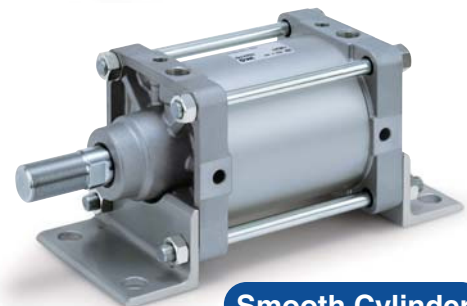

Smooth Cylinder

Series CS2




CAT.ES20-196B

Improved operability after installation

Operability has been improved by placing the piping port and cushion valve operation position on the same side.

Compact auto switches can be mounted

2-color display auto switches can be mounted, enabling precise determination of mounting position, without error.

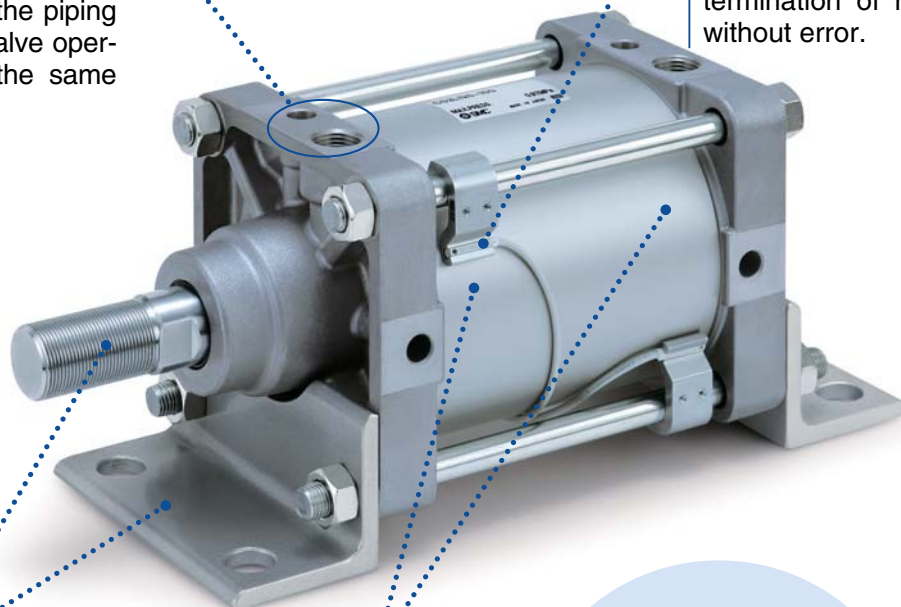

Interchangeability with Series CS1

Cylinder mounting dimensions and rod end thread sizes are interchangeable with Series CS1.

Cushion seals are now replaceable

Maintenance improved by making cushion seals replaceable.

Smooth Cylinder



- Minimum operating pressure **0.005 MPa**
- Realize stable, low speed operation at even **5 mm/s**

Series Variations

Series	Action	Type	Standard variations		Bore size (mm)	Made to Order
			With rod boot	Copper-free		
P.2  Standard CS2	Double acting	Single rod	●	●	125 140 160	• Change of rod end shape NEW • Special port positions • Change of trunnion bracket mounting position • Change of tie-rod length • Double clevis pin and double knuckle pin with split pin and flat washer • Double clevis pin and double knuckle pin made of stainless steel • Rod side trunnion mounted on the front of the rod cover • Made of stainless steel (Piston rod is hard chrome plated) • With rod end bracket
		NEW Double rod	●	●		
P.17  Smooth Cylinder CS2Y NEW	Double acting	Single rod	●			

Combination of Standard Products and Made to Order Specifications

Series CS2

- : Standard
 ◎ : Made to Order specifications
 ○ : Special product (Contact SMC for details)
 — : Not available

Symbol	Specification	Applicable bore size	ø125 to ø160		ø125 to ø160
Standard	Standard	ø125 to ø160	●	●	●
CDS2	Built-in magnet		●	●	●
CS2□-□ ^J _K	With rod boot		●	●	●
20-	Copper and Fluorine-free		◎	◎	—
-XA□	Change of rod end shape	ø125 to ø160	◎	◎	◎
-XB5	Oversized rod cylinder		○	○	○
-XB6	Heat-resistant cylinder (–10 to 150°C)		○	○	—
-XB7	Cold-resistant cylinder		○	○	—
-XB9	Low speed cylinder (5 to 50 mm/s)		○	○	○
-XC3	Special port position		◎	○	◎
-XC4	With heavy duty scraper		○	○	—
-XC5	Heat resistant cylinder (0 to 110°C)		○	○	—
-XC6	Made of stainless steel		—	—	—
-XC7	Tie-rod, cushion valve, tie-rod nut, etc. made of stainless steel		○	○	○
-XC8	Adjustable stroke cylinder/Adjustable extension type		○	—	—
-XC9	Adjustable stroke cylinder/Adjustable retraction type		○	—	○
-XC10	Dual stroke cylinder/Double rod type		○	—	○
-XC11	Dual stroke cylinder/Single rod type		○	—	○
-XC12	Tandem cylinder		○	—	—
-XC14	Change of trunnion bracket mounting position		◎	◎	◎
-XC15	Change of tie-rod length		◎	◎	◎
-XC22	Fluororubber seal		○	○	—
-XC26	Double clevis pin/Double knuckle pin with split pin and flat washer		◎	—	◎
-XC27	Double clevis pin and double knuckle pin made of stainless steel		◎	—	◎
-XC30	Rod side trunnion mounted on the front of the rod cover		◎	◎	◎
-XC35	With coil scraper		○	○	—
-XC39	Special trunnion bearing		○	○	○
-XC40	Clevis hole with bushing		○	—	○
-XC50	Knuckle fixed with nut		○	○	○
-XC68	Made of stainless steel (With hard chrome plated piston rod)		◎	◎	◎
-XC86	With rod end bracket		◎	○	◎

Basic

Double Rod Type

Smooth Cylinder

Auto Switch

Made to Order

Air Cylinder

Series CS2

ø125, ø140, ø160

How to Order

CS2 L 125 - 300

With auto switch **CDS2 L 125 - 300 M9BW**

With auto switch
(Built-in magnet)

Mounting

B	Basic
L	Foot
F	Rod flange
G	Head flange
C	Single clevis
D	Double clevis
T	Center trunnion

Bore size

125	125 mm
140	140 mm
160	160 mm

Port thread type

Nil	Rc
TN	NPT
TF	G

Made to Order
For details, refer to the next page.

Number of auto switches

Nil	2 pcs.
3	3 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Rod boot	Nil	None
	J	Nylon tarpaulin
	K	Heat resistant tarpaulin

* With air cushions on both sides only.

Cylinder stroke (mm)
Refer to the next page for the "Maximum Stroke" table.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch.
(Example) CDS2B125-200

Applicable Auto Switches / For detailed auto switch specifications, refer to Best Pneumatics No. 2.

Applicable Parts Overview																					
Detailed data switch specifications, refer to Book 1 (Reference No. 1)																					
Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage			Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load						
					DC		AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)								
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9N	—	●	●	●	○	○	IC circuit	Relay, PLC					
				3-wire (PNP)				M9P	—	●	●	●	○	○							
		Terminal conduit		2-wire				—	100 V, 200 V	M9B	—	●	●	●			○	○			
				J51						—	●	—	●	○			—				
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	24 V	5 V, 12 V	—	—	G39	—	—	—	—	—	IC circuit						
				2-wire				—	K39	—	—	—	—	—	—						
				3-wire (NPN)				M9NW	—	●	●	●	○	○	IC circuit						
				3-wire (PNP)				M9PW	—	●	●	●	○	○	IC circuit						
				2-wire				M9BW	—	●	●	●	○	○							
				3-wire (NPN)				M9NA	—	○	○	●	○	○							
				3-wire (PNP)				M9PA	—	○	○	●	○	○							
				2-wire				M9BA	—	○	○	●	○	○	—						
	Diagnostic indication (2-color indication)	4-wire (NPN)	5 V, 12 V	F59F	—	●	—	●	○	○	IC circuit										
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	—	A96	—	●	—	●	—	—	IC circuit	Relay, PLC					
				Terminal conduit				2-wire	12 V	100 V	A93	—	●	—	●		—	—	—		
									DIN terminal	12 V	5 V, 12 V	100 V or less	A90	—	●		—	●		—	—
											100 V, 200 V	A54	—	●	—		●	●		—	
		200 V or less									A64	—	●	—	●		—	—			
		Diagnostic indication (2-color indication)		Grommet				Yes	—	—	—	A59W	—	●	—		●	—	—	Relay, PLC	
												—	—	—	—		—	—	—		—

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
 1 m M (Example) M9NWM
 3 m L (Example) M9NWL
 5 m Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are applicable auto switches other than listed, refer to page 23 for details.


* For details about auto switches with pre-wired connector, refer to Best Pneumatics No. 2.

* D-A9□, M9□, M9□W, M9□AL are shipped together (but not assembled). (Only auto switch mounting bracket is assembled at the time of shipment.)



JIS Symbol

Double acting



Made to Order Specifications (For details, refer to pages 25 to 29.)

Symbol	Specifications
-XA□	Change of rod end shape
-XC3	Special port position
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC26	Double clevis pin/Double knuckle pin with split pin and flat washer
-XC27	Double clevis pin and double knuckle pin made of stainless steel
-XC30	Rod side trunnion mounted on the front of the rod cover
-XC68	Made of stainless steel (With hard chrome plated piston rod)
-XC86	With rod end bracket

Rod Boot Material

Symbol	Material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

For the specifications of cylinders with auto-switch, please refer to pages 21 to 24.

- Minimum stroke for auto switch mounting
- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Operating range
- Auto switch mounting bracket part no.

Specifications

Bore size (mm)	125	140	160
Action	Double acting, Single rod		
Fluid	Air		
Proof pressure	1.57 MPa		
Maximum operating pressure	0.97 MPa		
Minimum operating pressure	0.05 MPa		
Piston speed	50 to 500 mm/s		
Cushion	Air cushion		
Ambient and fluid temperature	Without auto switch	0 to 70°C (No freezing)	
	With auto switch	0 to 60°C (No freezing)	
Lubrication	Not required (Non-lube)		
Stroke length tolerance (mm)	Stroke	Tolerance	
	250 or less	+1.0 0	
	251 to 1000	+1.4 0	
	1001 to 1500	+1.8 0	
	1501 to 1600	+2.2 0	
Mounting	Basic, Foot, Rod flange, Head flange, Single clevis, Double clevis, Center trunnion		

Maximum Stroke

		Maximum stroke (mm)	
		Basic, Head flange, Single clevis, Double clevis, Center trunnion	Foot, Rod flange
Bore size	125	1000 or less	1600 or less
	140		
	160	1200 or less	

Accessory

Mounting		Basic	Foot	Rod flange	Head flange	Single clevis	Double clevis	Center trunnion
Standard equipment	Clevis pin	—	—	—	—	—	●	—
Option	Rod end nut	●	●	●	●	●	●	●
	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint (Knuckle pin, Split pin)	●	●	●	●	●	●	●
	Rod boot	●	●	●	●	●	●	●

* If using the rod end nut with a single knuckle joint or a double knuckle joint, use the type with rod end bracket (-XC86) or refer to page 11.

Mounting Bracket Part No.

Bore size (mm)	125	140	160
Foot*	CS2-L12	CS2-L14	CS2-L16
Flange	CS2-F12	CS2-F14	CS2-F16
Single clevis	CS2-C12	CS2-C14	CS2-C16
Double clevis**	CS2-D12	CS2-D14	CS2-D16

* Order two foot brackets per cylinder.

** When ordering the double clevis style, the clevis pin and 2 split pins are included as accessories.

Weight

Bore size (mm)		(kg)		
		125	140	160
Basic weight	Basic	5.46	6.50	9.07
	Foot	7.49	9.50	12.45
	Rod flange	8.51	12.03	15.80
	Head flange	8.51	12.03	15.80
	Single clevis	8.53	10.79	14.56
	Double clevis	8.99	11.54	15.41
	Trunnion	9.59	12.23	15.47
Additional weight with magnet (With built-in magnet and auto switch)		0.07	0.07	0.08
Additional mass per each 100 mm of stroke		1.55	1.67	2.23
Accessory bracket	Single knuckle	0.91	1.16	1.56
	Double knuckle (With Knuckle pin, Split pin)	1.37	1.81	2.48
	Rod end nut	0.16	0.16	0.23

Calculation: (Example) **CS2L160-500**

- Basic weight 12.45 (kg)
 - Additional weight 2.23 (kg/100 mm)
 - Cylinder stroke 500 (mm)
- $$12.45 + 2.23 \times 500/100 = 23.60 \text{ (kg)}$$

Warning

- Do not use the cylinder as a shock absorber.**
Using the cylinder as a shock absorber may cause damage.
- Do not open the cushion valve beyond the stopper.**
As a retaining mechanism for the cushion valve, retaining ring is installed, and the cushion valve should not be opened beyond that point.
If not operated in accordance with the above precautions, the cushion valve may be ejected from the cover when air pressure is supplied.
- Use the air cushion at the end of cylinder stroke.**


Caution

- Regarding the installation of a knuckle joint**
Please contact SMC if a knuckle joint must be installed on the piston rod by using the rod end nut.
- Regarding the screw-in of fittings when piping**
When ports and fittings are screwed in, tighten them with the proper tightening torque below.

Bore size (mm)	Connecting thread nominal size	Proper tightening torque N·m
125, 140	1/2	28 to 30
160	3/4	

- Do not deform cushion rings when removing and assembling.**
Cushion rings are press molded products. If a cushion ring bumps with something when removing and assembling, the air cushion may not function properly due to cushion ring deformation.

Theoretical Output / Double Acting



Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)								
				0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
125	32	OUT	12300	2460	3690	4920	6150	7380	8610	9840	11100	12300
		IN	11500	2300	3450	4600	5750	6900	8050	9200	10400	11500
140	32	OUT	15400	3080	4620	6160	7700	9240	10800	12300	13900	15400
		IN	14600	2920	4380	5840	7300	8760	10200	11700	13100	14600
160	38	OUT	20100	4020	6030	8040	10100	12100	14100	16100	18100	20100
		IN	19000	3800	5700	7600	9500	11400	13300	15200	17100	19000


Relation between Cylinder Size and Maximum Stroke

The below table shows the applicable maximum stroke (in cm units), found by calculation assuming the case where the force generated by the cylinder itself acts as buckling force on the piston rod, or piston rod and cylinder tube.

Therefore, it is possible to find the applicable maximum stroke for each cylinder size using the relationship between the size of the operating pressure and the cylinder support type, regardless of the load ratio.



[Reference] If it is stopped with the external stopper on the cylinder extension side, even with a light load, the maximum generated force of the cylinder will act on the cylinder itself.



Mounting			Operating pressure (MPa)	(cm) Applicable max. stroke according to buckling strength (cm)			
Support bracket nominal symbol and schematic diagram		Nominal symbol		125	140	160	
Foot: L	Rod flange: F	Head flange: G	L, F	0.3	103	92	113
				0.5	79	70	86
				0.7	66	58	72
			G	0.3	45	38	47
				0.5	33	27	34
				0.7	26	22	27
Clevis: C, D		Center trunnion: T	C, D	0.3	96	83	106
				0.5	71	61	76
				0.7	59	50	62
			T	0.3	135	119	147
0.5	101	89		111			
0.7	84	74		91			
Foot: L	Rod flange: F	Head flange: G	L, F	0.3	301	267	330
				0.5	231	207	253
				0.7	193	172	212
			G	0.3	144	126	156
				0.5	109	94	118
				0.7	90	78	97
Foot: L	Rod flange: F	Head flange: G	L, F	0.3	433	386	476
				0.5	334	297	367
				0.7	281	250	309
			G	0.3	210	185	229
				0.5	160	141	175
				0.7	134	117	129

Basic



Double Rod Type

Smooth Cylinder

Auto Switch

Made to Order

Construction

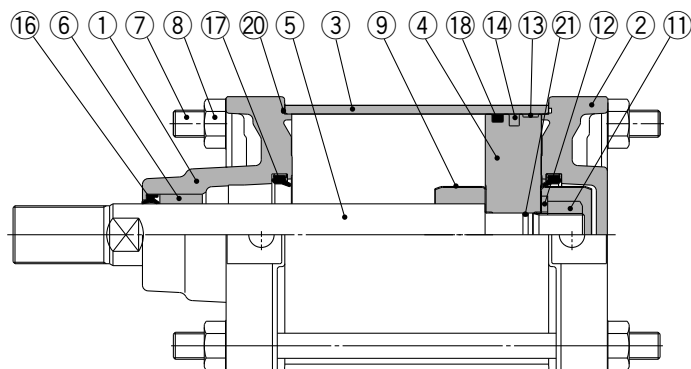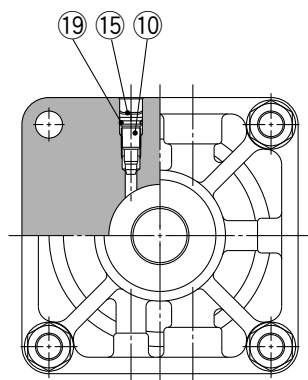

Component Parts

No. □	Description	Material □	Note □
1	Rod cover	Aluminum die-cast □	Chromated □
2	Head cover	Aluminum die-cast □	Chromated □
3	Cylinder tube	Aluminum alloy □	Hard anodized □
4	Piston	Aluminum alloy □	Chromated □
5	Piston rod	Carbon steel □	Hard chrome plated □
6	Bushing	Oil-impregnated sintered alloy □	□
7	Tie-rod	Carbon steel □	Zinc chromated □
8	Tie-rod nut	Rolled steel □	Nickel plated □
9	Cushion ring	Stainless steel □	□
10	Cushion valve	Rolled steel □	Nickel plated □
11	Piston nut	Carbon steel □	Nickel plated □
12	Flat washer	Carbon steel □	Nickel plated □
13	Wear ring	Resin □	□
14	Magnet*	— □	□
15	Retaining ring	Spring steel	Phosphate coated

* Built-in magnet type with auto switch

Component Parts

No. □	Description	Material □	Note □
16	Rod seal	NBR □	□
17	Cushion seal	Urethane □	
18	Piston seal	NBR □	
19	Valve seal	NBR □	
20	Tube gasket	NBR □	
21	Piston gasket	NBR	

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Content
125	CS2-125A-PS □	Set of nos. □ above 16, 17, 18, 20.
140	CS2-140A-PS □	
160	CS2-160A-PS	

* Seal kit includes a grease pack (40 g). □


Order with the following part number when only the grease pack is needed. □

Grease pack part number: GR-S-010 (10 g), GR-S-020 (20 g)

Dimensions

Basic: CS2B

With rod boot

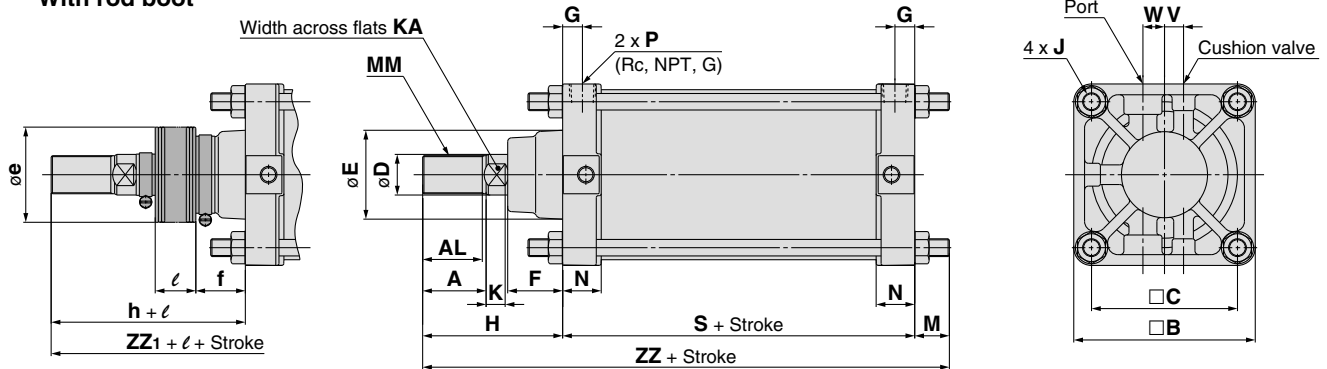

(mm)

Bore size (mm)	Stroke range (mm)	A	AL	□B	□C	D	E	F	G	J	V	W	K	KA	M	MM
125	Up to 1000	50	47	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	27	M30 x 1.5
140	Up to 1000	50	47	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	27	M30 x 1.5
160	Up to 1200	56	53	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	30.5	M36 x 1.5

(mm)

Bore size (mm)	N	P	S	Without rod boot		With rod boot				
				H	ZZ	e	f	h	ℓ	ZZ ₁
125	30.5	1/2	98	110	235	75	40	133	1/5 stroke	258
140	30.5	1/2	98	110	235	75	40	133	1/5 stroke	258
160	34.5	3/4	106	120	256.5	75	40	141	1/5 stroke	277.5


* The minimum stroke with rod boot is 30 mm or more.

** For auto switch mounting position and its mounting height, refer to page 21.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Foot: CS2L

With rod boot

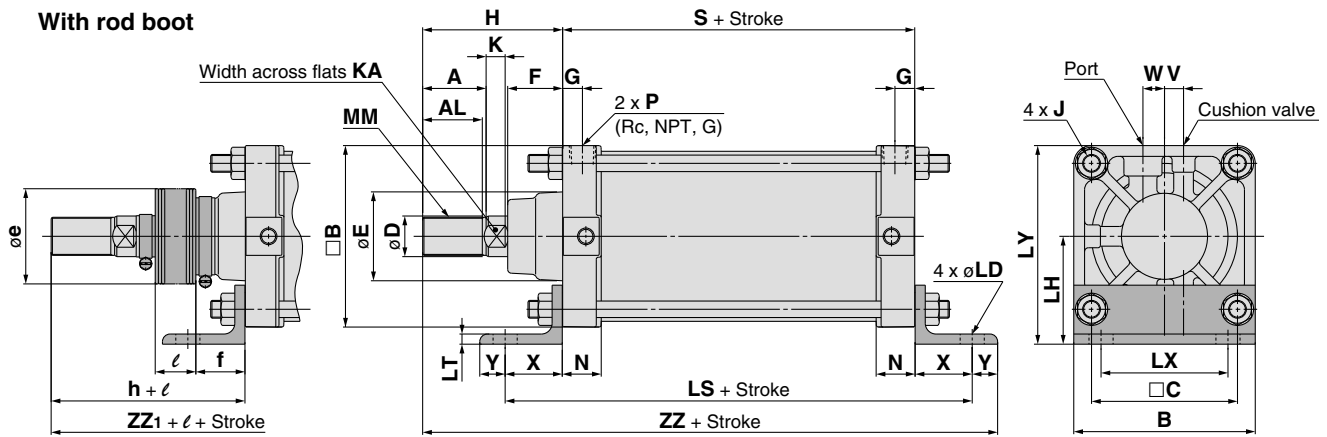

(mm)

Bore size (mm)	Stroke range (mm)	A	AL	□B	B	□C	D	E	F	G	J	V	W	K	KA	LD	LH	LS
125	Up to 1600	50	47	143	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	19	85	188
140	Up to 1600	50	47	157	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	19	100	188
160	Up to 1600	56	53	177	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	19	106	206

(mm)

Bore size (mm)	LT	LX	LY	MM	N	P	S	X	Y	Without rod boot		With rod boot				
										H	ZZ	e	f	h	ℓ	ZZ ₁
125	8	100	156.5	M30 x 1.5	30.5	1/2	98	45	20	110	273	75	40	133	1/5 stroke	296
140	9	112	178.5	M30 x 1.5	30.5	1/2	98	45	30	110	283	75	40	133	1/5 stroke	306
160	9	118	194.5	M36 x 1.5	34.5	3/4	106	50	25	120	301	75	40	141	1/5 stroke	322


* The minimum stroke with rod boot is 30 mm or more.

** For auto switch mounting position and its mounting height, refer to page 21.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Dimensions

Rod flange: CS2F

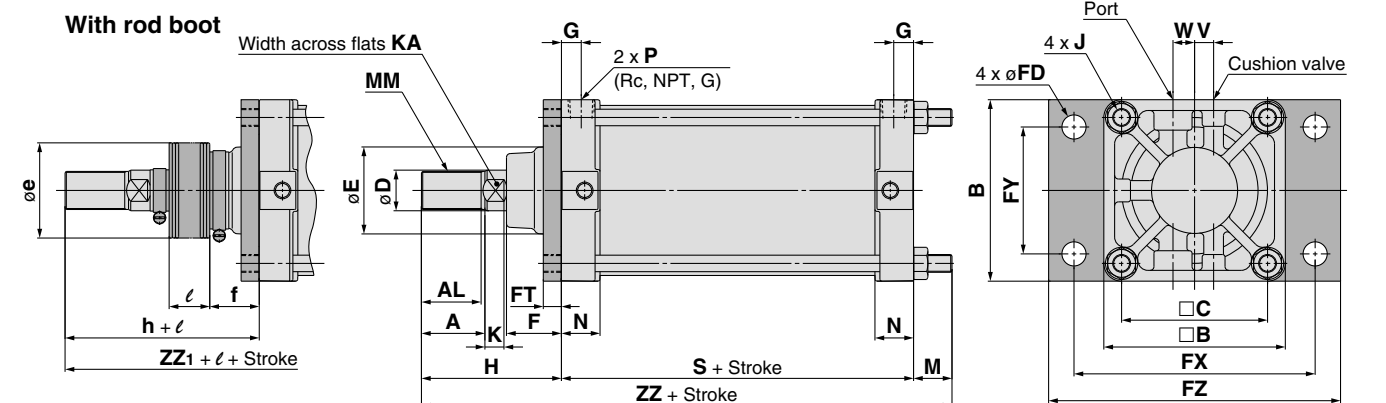

(mm)

Bore size (mm)	Stroke range (mm)	A	AL	□B	B	□C	D	E	F	FD	FT	FX	FY	FZ	G	J	V
125	Up to 1600	50	47	143	145	115	32	71	43	19	14	190	100	230	15	M14 x 1.5	15
140	Up to 1600	50	47	157	160	128	32	71	43	19	20	212	112	255	15	M14 x 1.5	15
160	Up to 1600	56	53	177	180	144	38	78.5	42	19	20	236	118	275	18	M16 x 1.5	15

(mm)


Bore size (mm)	W	K	KA	M	MM	N	P	S	Without rod boot		With rod boot				
									H	ZZ	e	f	h	ℓ	ZZ1
125	17	15	27	13	M30 x 1.5	30.5	1/2	98	110	221	75	40	133	⅓ stroke	244
140	17	15	27	13	M30 x 1.5	30.5	1/2	98	110	221	75	40	133	⅓ stroke	244
160	20	17	34	15	M36 x 1.5	34.5	3/4	106	120	241	75	40	141	⅓ stroke	262

* The minimum stroke with rod boot is 30 mm or more.

** For auto switch mounting position and its mounting height, refer to page 21.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Head flange: CS2G

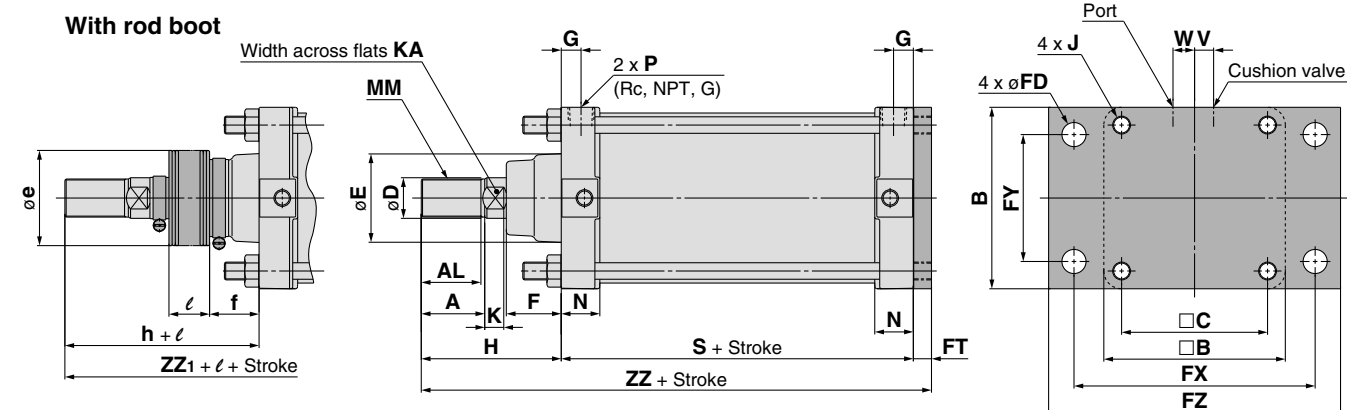

(mm)

Bore size (mm)	Stroke range (mm)	A	AL	□B	B	□C	D	E	F	FD	FT	FX	FY	FZ	G	J	V
125	Up to 1000	50	47	143	145	115	32	71	43	19	14	190	100	230	15	M14 x 1.5	15
140	Up to 1000	50	47	157	160	128	32	71	43	19	20	212	112	255	15	M14 x 1.5	15
160	Up to 1200	56	53	177	180	144	38	78.5	42	19	20	236	118	275	18	M16 x 1.5	15

(mm)

Bore size (mm)	W	K	KA	MM	N	P	S	Without rod boot		With rod boot				
								H	ZZ	e	f	h	ℓ	ZZ1
125	17	15	27	M30 x 1.5	30.5	1/2	98	110	222	75	40	133	⅓ stroke	245
140	17	15	27	M30 x 1.5	30.5	1/2	98	110	228	75	40	133	⅓ stroke	251
160	20	17	34	M36 x 1.5	34.5	3/4	106	120	246	75	40	141	⅓ stroke	267


* The minimum stroke with rod boot is 30 mm or more.

** For auto switch mounting position and its mounting height, refer to page 21.


*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Dimensions

Single clevis: CS2C

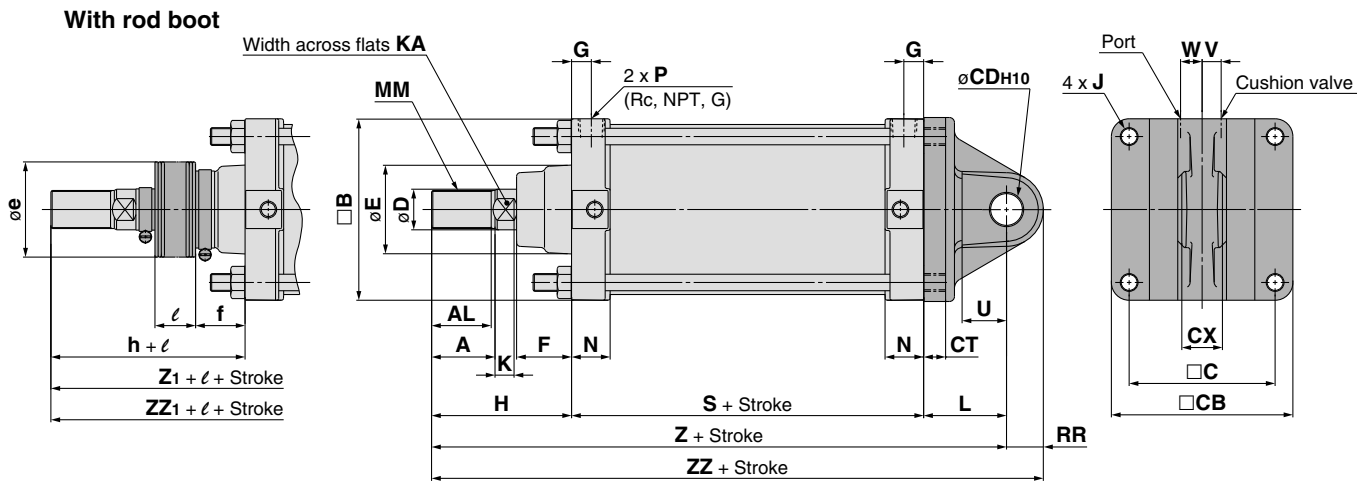

Double clevis: CS2D

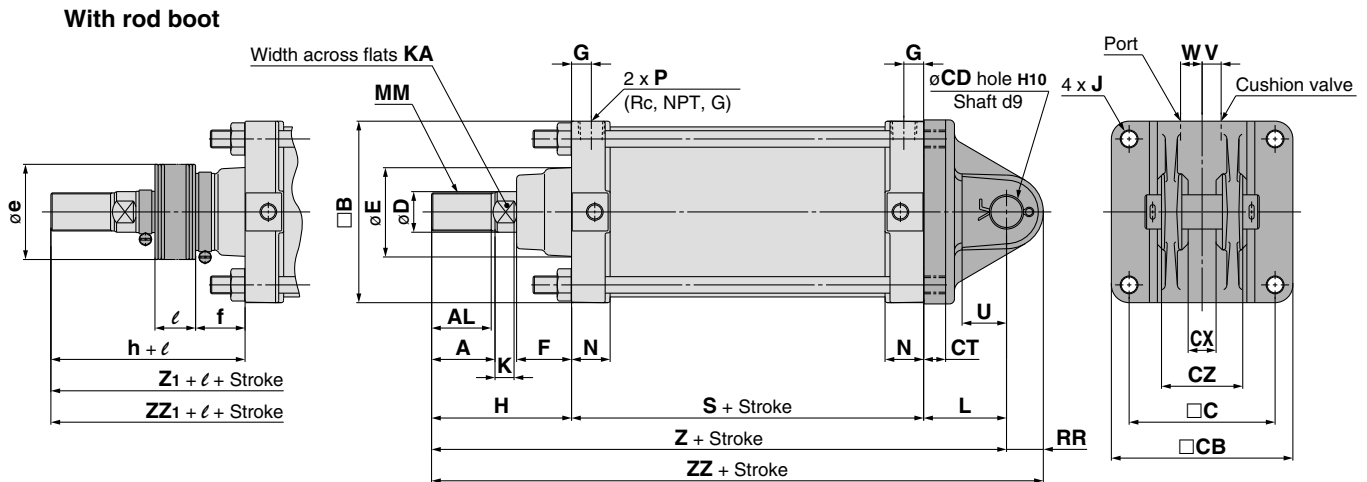

Bore size (mm)	Stroke range (mm)	A	AL	□B	□C	□CB	CDH10	CT	Single clevis			D	E	F	G	J	V	W
									CX	CX	CZ							
125	Up to 1000	50	47	143	115	145	25 ^{+0.084} ₀	17	32 ^{-0.1} _{-0.3}	32 ^{+0.3} _{+0.1}	64 ⁰ _{-0.2}	32	71	43	15	M14 x 1.5	15	17
140	Up to 1000	50	47	157	128	160	28 ^{+0.084} ₀	17	36 ^{-0.1} _{-0.3}	36 ^{+0.3} _{+0.1}	72 ⁰ _{-0.2}	32	71	43	15	M14 x 1.5	15	17
160	Up to 1200	56	53	177	144	180	32 ^{+0.100} ₀	20	40 ^{-0.1} _{-0.3}	40 ^{+0.3} _{+0.1}	80 ⁰ _{-0.2}	38	78.5	42	18	M16 x 1.5	15	20

Bore size (mm)	K	KA	L	MM	N	P	S	U	RR	Without rod boot			With rod boot					
										H	Z	ZZ	e	f	h	l	Z1	ZZ1
125	15	27	65	M30 x 1.5	30.5	1/2	98	35	29	110	273	302	75	40	133	1/5 stroke	296	325
140	15	27	75	M30 x 1.5	30.5	1/2	98	40	32	110	283	315	75	40	133	1/5 stroke	306	338
160	17	34	80	M36 x 1.5	34.5	3/4	106	45	36	120	306	342	75	40	141	1/5 stroke	327	363


* The minimum stroke with rod boot is 30 mm or more.
 ** For auto switch mounting position and its mounting height, refer to page 21.
 *** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Series CS2

Dimensions

Center trunnion: CS2T

With rod boot

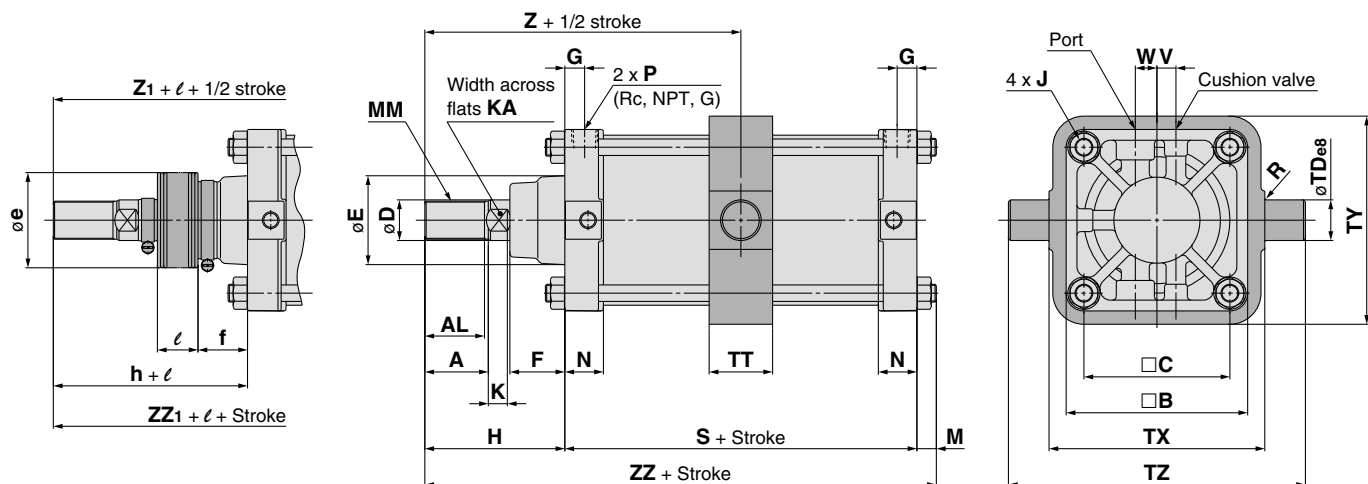

(mm)

Bore size (mm)	Stroke range (mm)	A	AL	□B	□C	D	E	F	G	J	V	W	K	KA	M	MM	N
125	25 to 1000	50	47	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	13	M30 x 1.5	30.5
140	30 to 1000	50	47	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	13	M30 x 1.5	30.5
160	35 to 1200	56	53	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	15	M36 x 1.5	34.5

(mm)

Bore size (mm)	P	R	S	TDø8	TT	TX	TY	TZ	Without rod boot			With rod boot					
									H	Z	ZZ	e	f	h	ℓ	Z ₁	ZZ ₁
125	1/2	1	98	32 ^{-0.050} _{-0.089}	50	170	164	234	110	159	221	75	40	133	⅓ stroke	182	244
140	1/2	1.5	98	36 ^{-0.050} _{-0.089}	55	190	184	262	110	159	221	75	40	133	⅓ stroke	182	244
160	3/4	1.5	106	40 ^{-0.050} _{-0.089}	60	212	204	292	120	173	241	75	40	141	⅓ stroke	194	262

* The minimum stroke with rod boot is 30 mm or more for ø125, ø140 and 35 mm or more for ø160.



** For auto switch mounting position and its mounting height, refer to page 21.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Air Cylinder / Series CS2

Accessory Bracket


I Type Single Knuckle Joint*



Material: Cast iron

Part no.	Applicable bore size (mm)	A1	A2	E1	L1	MM	NDH10	NX	RR1	U1
I-12A	125	8	54	46	100	M30 x 1.5	25 ^{+0.084} ₀	32 ^{-0.1} _{-0.3}	27	33
I-14A	140	8	54	48	105	M30 x 1.5	28 ^{+0.084} ₀	36 ^{-0.1} _{-0.3}	30	39
I-16A	160	8	60	55	110	M36 x 1.5	32 ^{+0.1} ₀	40 ^{-0.1} _{-0.3}	34	39

Knuckle Pin / Clevis Pin





Material: Carbon steel

Part no.	Applicable bore size (mm)	Dø9	L	ℓ	m	d (Drill through)	Applicable split pin
IY-12	125	25 ^{-0.065} _{-0.117}	79.5	69.5	5	4	ø4 x 40
IY-14	140	28 ^{-0.065} _{-0.117}	86.5	76.5	5	4	ø4 x 40
IY-16	160	32 ^{-0.080} _{-0.142}	94.5	84.5	5	4	ø4 x 40

* Split pin is included.

Y Type Double Knuckle Joint*




Material: Cast iron

Part no.	Applicable bore size (mm)	A1	E1	L1	MM	NDH10	NX	NZ	RR1	U1
Y-12A	125	8	46	100	M30 x 1.5	25 ^{-0.084} ₀	32 ^{+0.3} _{+0.1}	64 ^{-0.1} _{-0.3}	27	42
Y-14A	140	8	48	105	M30 x 1.5	28 ^{-0.084} ₀	36 ^{+0.3} _{+0.1}	72 ^{-0.1} _{-0.3}	30	47
Y-16A	160	8	55	110	M36 x 1.5	32 ^{+0.1} ₀	40 ^{+0.3} _{+0.1}	80 ^{-0.1} _{-0.3}	34	46

- * Use a single knuckle joint or a double knuckle joint individually. (Screw it entirely over the rod end threads and tighten it.)
- * Extend the dimensions of A, H, when using a single/double knuckle joint together with a rod end nut. (To extend dimensions A, H, refer to the below table, and specify the product as made-to-order -XA0.)
- * A pin and split pin are included with the double knuckled joint.

Rod End Nut




Material: Rolled steel

Part no.	Applicable bore size (mm)	d	H	B	C	D
NT-12	125, 140	M30 x 1.5	18	46	53.1	44
NT-16	160	M36 x 1.5	21	55	63.5	53

● "Made to order" with rod end bracket (-XC86) is available when ordering cylinders and accessories together. Please refer to page 29 for details.

Single/Double Knuckle Joint

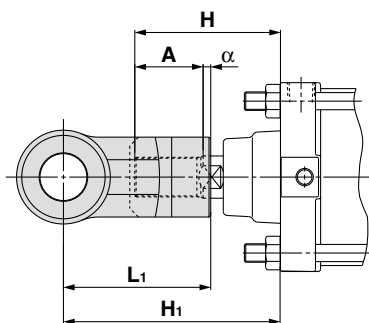

Bore size (mm)	Symbol	H	A	α	L1	H1	Applicable knuckle joint part number	
							I type single knuckle	Y type double knuckle
125		110	50	3.5	100	156.5	I-12A	Y-12A
140		110	50	3.5	105	161.5	I-14A	Y-14A
160		120	56	3.5	110	170.5	I-16A	Y-16A

A, H Dimensions when Mounting a Single/Double Knuckle Joint together with a Rod End Nut

Bore size (mm)	A	H
125	65	125
140	65	125
160	76	140

Air Cylinder, Double Rod

Series CS2W

ø125, ø140, ø160

How to Order

CS2W L 125 - 100

With auto switch CDS2W L 125 - 100 - M9BW

With auto switch (Built-in magnet)

Double rod type

Mounting

B	Basic
L	Foot
F	Rod flange
T	Center trunnion

Bore size

125	125 mm
140	140 mm
160	160 mm

Port thread type

Nil	Rc
TN	NPT
TF	G

Cylinder stroke (mm)

Refer to the next page for the "Maximum Stroke" table.

Made to Order
For details, refer to the next page.

Number of auto switches

Nil	2 pcs.
3	3 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Single side rod boot	J	Nylon tarpaulin
Both side rod boot	K	Heat resistant tarpaulin
Both side rod boot	JJ	Nylon tarpaulin
Both side rod boot	KK	Heat resistant tarpaulin

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch.

(Example) CDS2WB125-100

Applicable Auto Switches / For detailed auto switch specifications, refer to Best Pneumatics No. 2.

Applicable load switch combinations for standard data switch specifications, refer to Best Performance No. 1.																
Type	Special function	Electrical entry	Indicator/light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load		
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state switch	—	Grommet		3-wire (NPN)	24 V	5 V, 12 V	—	M9N	—	●	●	●	○	○	IC circuit	Relay, PLC
				3-wire (PNP)		12 V		M9P	—	●	●	●	○	○		
		Terminal conduit		2-wire	—	100 V, 200 V	M9B	—	●	●	●	○	○	—		
				—			J51	—	●	—	●	○	—			
	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	—	G39	—	—	—	—	—	IC circuit	
				2-wire		12 V		—	K39	—	—	—	—	—	—	
				3-wire (NPN)		5 V, 12 V		M9NW	—	●	●	●	○	○	IC circuit	
				3-wire (PNP)		5 V, 12 V		M9PW	—	●	●	●	○	○	IC circuit	
		Grommet	No	2-wire		12 V		M9BW	—	●	●	●	○	○	—	
				3-wire (NPN)		5 V, 12 V		M9NA	—	○	○	●	○	○	IC circuit	
				3-wire (PNP)		5 V, 12 V		M9PA	—	○	○	●	○	○	—	
2-wire				12 V		M9BA		—	○	○	●	○	○	—		
Diagnostic indication (2-color indication)	4-wire (NPN)	5 V, 12 V	F59F	—	●	—	●	○	○	IC circuit						
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	—	A96	—	●	—	●	—	—	IC circuit	Relay, PLC
						12 V	100 V	A93	—	●	—	●	—	—	—	
						5 V, 12 V	100 V or less	A90	—	●	—	●	—	—	IC circuit	
						Terminal conduit	No	100 V, 200 V	A54	—	●	—	●	●	—	—
								200 V or less	A64	—	●	—	●	—	—	—
		DIN terminal	Yes	2-wire		12 V	—	—	A33	—	—	—	—	—	—	PLC
						100 V, 200 V	—	—	A34	—	—	—	—	—	—	
		Grommet	No	2-wire		—	—	—	A59W	—	●	—	●	—	—	—
						—	—	—	—	—	—	—	—	—	—	

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
 1 m M (Example) M9NWM
 3 m L (Example) M9NWL
 5 m Z (Example) M9NWX

* Solid state auto switches marked with "○" are produced upon receipt of order.


* Since there are applicable auto switches other than listed, refer to page 23 for details.

* For details about auto switches with pre-wired connector, refer to Best Pneumatics No. 2.

* D-A9□, M9□, M9□W, M9□AL are shipped together (but not assembled). (Only auto switch mounting bracket is assembled at the time of shipment.)



JIS Symbol



Rod Boot Material

Symbol	Material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Minimum Stroke for Auto Switch Mounting

For details on the minimum number of strokes required for mounting, please refer to the "Minimum Stroke for Auto Switch Mounting" table on page 22.



Made to Order Specifications (For details, refer to pages 25 to 29.)

Symbol	Specifications
-XA□	Change of rod end shape
-XC14	Change of trunnion bracket mounting positions
-XC15	Change of tie-rod length
-XC30	Rod side trunnion mounted on the front of the rod cover
-XC68	Made of stainless steel (With hard chrome plated piston rod)

For the specifications of cylinders with auto-switch, please refer to pages 21 to 24.

- Minimum stroke for auto switch mounting
- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Operating range
- Auto switch mounting bracket part no.

Specifications

Bore size (mm)	125	140	160
Action	Double acting, Double rod		
Fluid	Air		
Proof pressure	1.57 MPa		
Maximum operating pressure	0.97 MPa		
Minimum operating pressure	0.05 MPa		
Piston speed	50 to 500 mm/s		
Cushion	Air cushion		
Ambient and fluid temperature	Without auto switch	0 to 70°C (No freezing)	
	With auto switch	0 to 60°C (No freezing)	
Lubrication	Not required (Non-lube)		
Stroke length tolerance	250 or less st : +1.0 ₀ , 251 to 1,000 st : +1.4 ₀ , 1,001 to 1,200 st : +1.8 ₀		
Mounting	Basic, Foot, Rod flange, Head flange, Center trunnion		

Maximum Stroke

Bore size	Maximum stroke (mm)
125	1000 or less
140	
160	1200 or less

Accessory

Mounting		Basic	Foot	Rod flange	Center trunnion
Option	Rod end nut	●	●	●	●
	Single knuckle joint	●	●	●	●
	Double knuckle joint (Knuckle pin, Split pin)	●	●	●	●
	Rod boot	●	●	●	●

* If using the rod end nut together with a single knuckle joint and a double knuckle joint, please refer to page 11.

Mounting Bracket Part No.

Bore size (mm)	125	140	160
Foot*	CS2-L12	CS2-L14	CS2-L16
Flange	CS2-F12	CS2-F14	CS2-F16

* Order two foot brackets per cylinder.

Weight / Aluminum tube: lube type


Bore size (mm)		125	140	160
Basic weight	Basic	6.36	7.54	9.93
	Foot	8.39	10.54	13.31
	Rod flange	9.41	13.07	16.66
	Trunnion	10.49	13.27	16.33
Additional weight with magnet (With built-in magnet and auto switch)		0.07	0.07	0.08
Additional weight per 100 mm of stroke		2.18	2.30	3.11
Accessory bracket	Single knuckle	0.91	1.16	1.56
	Double knuckle joint (Knuckle pin, Split pin)	1.37	1.81	2.48
	Rod end nut	0.16	0.16	0.23

Calculation: (Example) **CS2WL160-500**

- Basic weight 13.31 (kg)
- Additional weight 3.11 (kg/100 mm)
- Cylinder stroke 500 (mm)
- 13.31 + 3.11 x 500/100 = 28.86 (kg)

Series CS2W

Construction

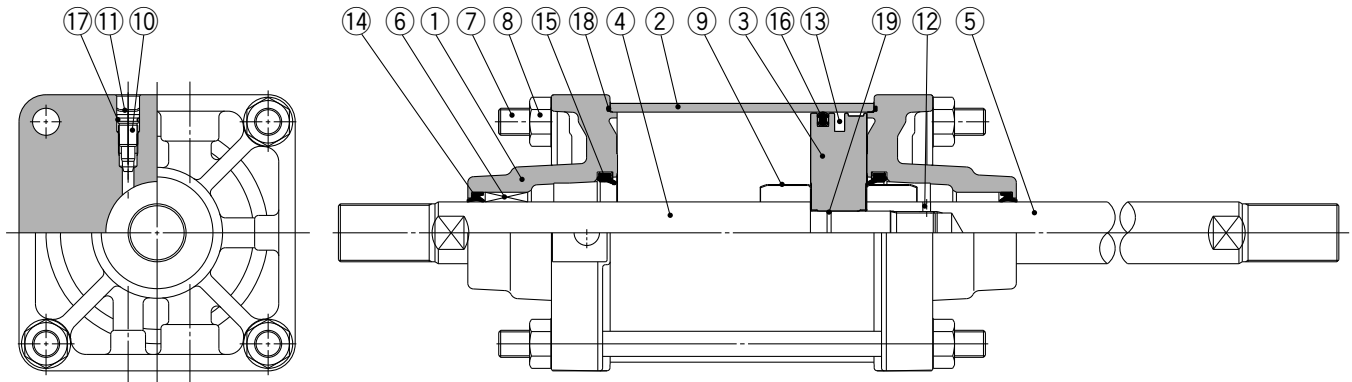

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum die-cast	Chromated
2	Cylinder tube	Aluminum alloy	Hard anodized
3	Piston	Aluminum alloy	Chromated
4	Piston rod A	Carbon steel	Hard chrome plated
5	Piston rod B	Carbon steel	Hard chrome plated
6	Bushing	Oil-impregnated sintered alloy	
7	Tie-rod	Carbon steel	Zinc chromated
8	Tie-rod nut	Rolled steel	Nickel plated
9	Cushion ring	Stainless steel	
10	Cushion valve	Rolled steel	Nickel plated
11	Retaining ring	Spring steel	Phosphate coated
12	Pin	Spring steel	Phosphate coated
13	Magnet*	—	

* Built-in magnet type with auto switch

Component Parts

No.	Description	Material	Note
14	Rod seal	NBR	
15	Cushion seal	Urethane	
16	Piston seal	NBR	
17	Valve seal	NBR	
18	Tube gasket	NBR	
19	Piston gasket	NBR	

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Content
125	CS2W125A-PS	Set of nos. above 14, 15, 16, 18.
140	CS2W140A-PS	
160	CS2W160A-PS	

* Seal kit includes a grease pack (40 g).




Order with the following part number when only the grease pack is needed.

Grease pack part number: GR-S-010 (10 g), GR-S-020 (20 g)



Dimensions

Basic: CS2WB

With rod boot (One side)

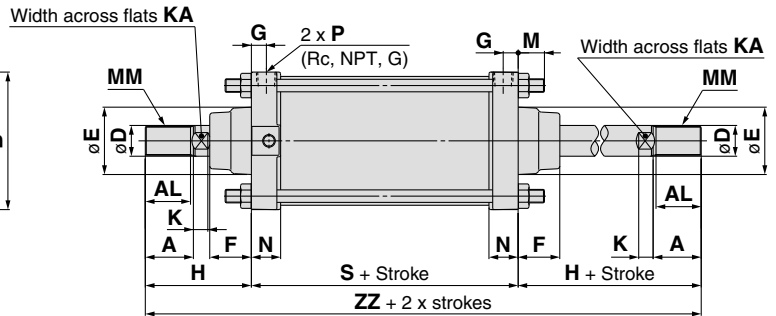

With rod boot (Both sides)

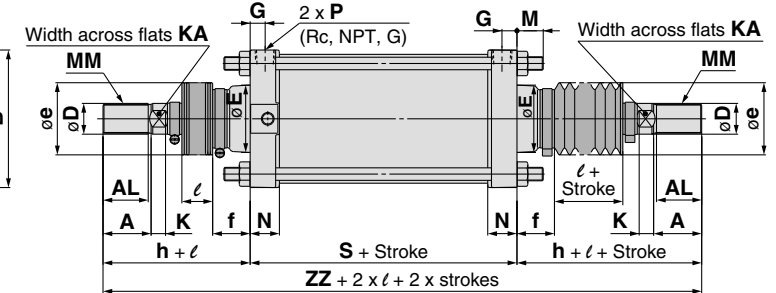




Bore size (mm)	Stroke range (mm)	A	AL	B	C	D	E	F	G	J	V	W	K	KA	M	MM	N	P	S
ø125	Up to 1000	50	47	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	27	M30 x 1.5	30.5	1/2	98
ø140	Up to 1000	50	47	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	27	M30 x 1.5	30.5	1/2	98
ø160	Up to 1200	56	53	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	30.5	M36 x 1.5	34.5	3/4	106

(mm)								
Bore size (mm)	Without rod boot		With rod boot (single side)					(Both sides)
	H	ZZ	e	f	h	ℓ	ZZ	ZZ
ø125	110	318	75	40	133	½ stroke	341	364
ø140	110	318	75	40	133	½ stroke	341	364
ø160	120	346	75	40	141	½ stroke	367	388

* The minimum stroke with rod boot is 30 mm or more.
 ** For auto switch mounting position and its mounting height, refer to page 21.
 *** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Foot: CS2WL

With rod boot

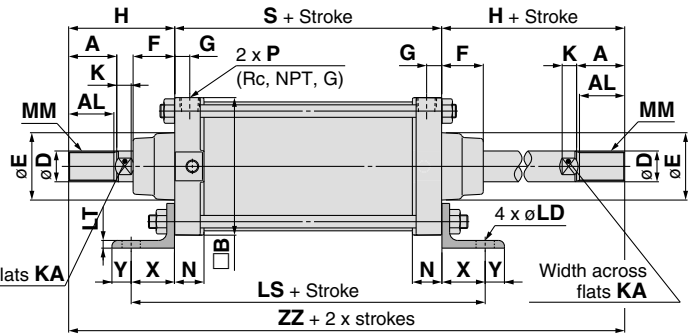

(mm)																					
Bore size (mm)	Stroke range (mm)	A	AL	□B	B	C	D	E	F	G	J	V	W	K	KA	LD	LH	LS	LT	LX	LY
ø125	Up to 1000	50	47	143	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	19	85	188	8	100	156.5
ø140	Up to 1000	50	47	157	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	19	100	188	9	112	178.5
ø160	Up to 1200	56	53	177	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	19	106	206	9	118	194.5


Bore size (mm)	MM	N	P	S	X	Y	Without rod boot	With rod boot (Single side)	(Both sides)
							H	ZZ	ZZ
ø125	M30 x 1.5	30.5	1/2	98	45	20	110	318	341
ø140	M30 x 1.5	30.5	1/2	98	45	30	110	318	341
ø160	M36 x 1.5	34.5	3/4	106	50	25	120	346	367

* The minimum stroke with rod boot is 30 mm or more.
 ** For auto switch mounting position and its mounting height, refer to page 21.
 *** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Series CS2W

Dimensions

Rod flange: CS2WF

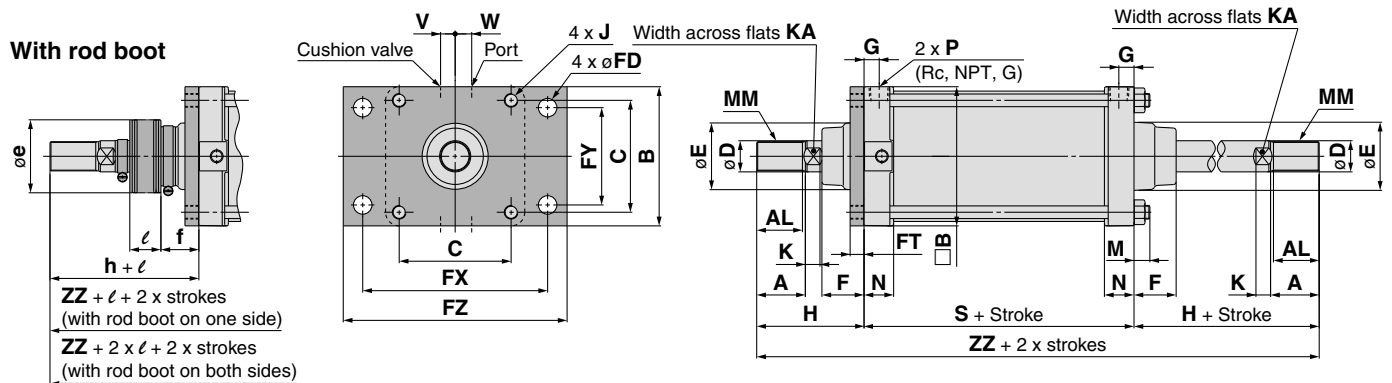


(mm)																					
Bore size (mm)	Stroke range (mm)	A	AL	 B	B	C	D	E	F	FD	FT	FX	FY	FZ	G	J	V	W	K	KA	M
ø125	Up to 1000	50	47	143	145	115	32	71	43	19	14	190	100	230	15	M14 x 1.5	15	17	15	27	13
ø140	Up to 1000	50	47	157	160	128	32	71	43	19	20	212	112	255	15	M14 x 1.5	15	17	15	27	13
ø160	Up to 1200	56	53	177	180	144	38	78.5	42	19	20	236	118	275	18	M16 x 1.5	15	20	17	34	15

(mm)													
Bore size (mm)	MM	N	P	S	Without rod boot		With rod boot (Single side)					(Both sides)	
					H	ZZ	e	f	h	ℓ	ZZ	ZZ	
ø125	M30 x 1.5	30.5	1/2	98	110	318	75	40	133	1/5 stroke	341	364	
ø140	M30 x 1.5	30.5	1/2	98	110	318	75	40	133	1/5 stroke	341	364	
ø160	M36 x 1.5	34.5	3/4	106	120	346	75	40	141	1/5 stroke	367	388	

* The minimum stroke with rod boot is 30 mm or more.
 ** For auto switch mounting position and its mounting height, refer to page 21.
 *** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Center trunnion: CS2WT

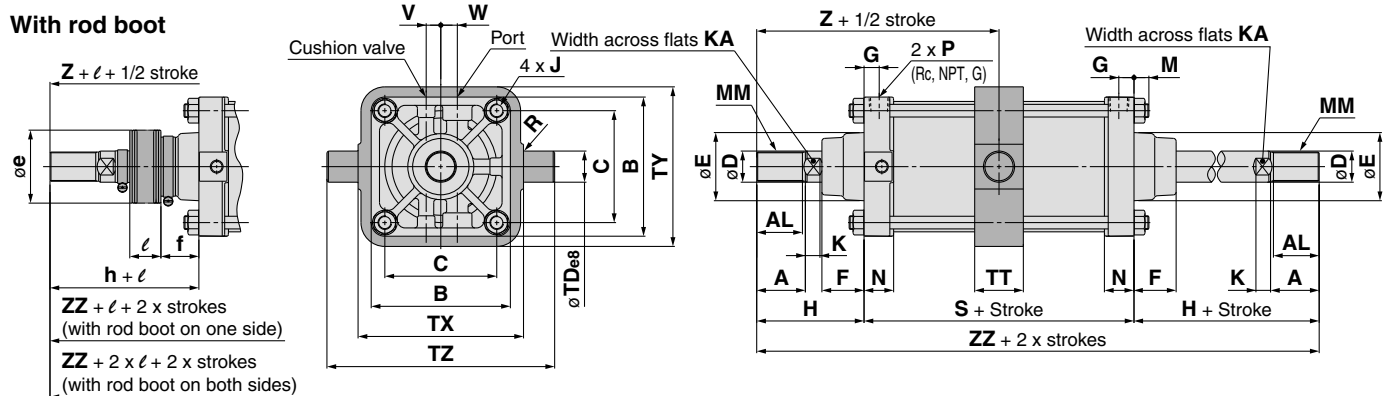

Bore size (mm)	Stroke range (mm)	A	AL	B	C	D	E	F	G	J	V	W	K	KA	M	MM	N	P	R	S
$\phi 125$	25 to 1000	50	47	143	115	32	71	43	15	M14 x 1.5	15	17	15	27	13	M30 x 1.5	30.5	1/2	1	98
$\phi 140$	30 to 1000	50	47	157	128	32	71	43	15	M14 x 1.5	15	17	15	27	13	M30 x 1.5	30.5	1/2	1.5	98
$\phi 160$	35 to 1200	56	53	177	144	38	78.5	42	18	M16 x 1.5	15	20	17	34	15	M36 x 1.5	34.5	3/4	1.5	106

															(mm)	
Bore size (mm)	TD _{e8}	TT	TX	TY	TZ	Without rod boot			With rod boot (Single side)							(Both sides)
						H	Z	ZZ	e	f	h	ℓ	Z	ZZ	ZZ	
ø125	32 ^{-0.050 -0.089}	50	170	164	234	110	159	318	75	40	133	1/5 stroke	182	341	364	
ø140	36 ^{-0.050 -0.089}	55	190	184	262	110	159	318	75	40	133	1/5 stroke	182	341	364	
ø160	40 ^{-0.050 -0.089}	60	212	204	292	120	173	346	75	40	141	1/5 stroke	194	367	388	

* The minimum stroke with rod boot is 30 mm or more for $\phi 125$, $\phi 140$, and 35 mm or more for $\phi 160$.
 ** For auto switch mounting position and its mounting height, refer to page 21.
 *** Refer to "Minimum Stroke for Auto Switch Mounting" on page 22.

Smooth Cylinder

Series CS2Y

ø125, ø140, ø160

How to Order

CS2 Y L 160 - 300

With auto switch CDS2 Y L 160 - 300 - M9BW

With auto switch (Built-in magnet)

Smooth Cylinder

Mounting

B	Basic
L	Foot
F	Rod flange
G	Head flange
C	Single clevis
D	Double clevis
T	Center trunnion

Bore size

125	125 mm
140	140 mm
160	160 mm

Port thread type

Nil	Rc
TN	NPT
TF	G

Cylinder stroke (mm)

Refer to the next page for the "Maximum Stroke" table.

Number of auto switches

Nil	2 pcs.
S	1 pc.
3	3 pcs.
n	"n" pcs.

Made to Order
For details, refer to the next page.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Rod boot	J	Nylon tarpaulin
	K	Heat resistant tarpaulin
	A	With double-side cushion
With/without cushion	R	With rod cushion
	H	With head cushion
	Nil	Without cushion

* When more than one symbol is specified, indicate them in alphabetical order.

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch.

(Example) CDS2YL125-200

Applicable Auto Switches / For detailed auto switch specifications, refer to Best Pneumatics No. 2.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load				
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)						
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9N	—	●	●	●	○	○	IC circuit	Relay, PLC		
				3-wire (PNP)				M9P	—	●	●	●	○	○				
		2-wire		—	—	100 V, 200 V	M9B	—	●	●	●	○	○	—				
		Terminal conduit		3-wire (NPN)	24 V	5 V, 12 V	—	G39	—	—	—	—	—	IC circuit				
	2-wire			K39				—	—	—	—	—	—					
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	24 V	5 V, 12 V	—	M9NW	—	●	●	●	○	○	IC circuit			
				3-wire (PNP)				M9PW	—	●	●	●	○	○				
				2-wire				M9BW	—	●	●	●	○	○	—			
				3-wire (NPN)				M9NA	—	○	○	●	○	○	IC circuit			
	Water resistant (2-color indication)	Grommet		3-wire (PNP)	24 V	5 V, 12 V	—	M9PA	—	○	○	●	○	○	—			
			2-wire	M9BA				—	○	○	●	○	○	—				
	Diagnostic indication (2-color indication)	Grommet	4-wire (NPN)	5 V, 12 V	F59F	—	●	—	●	○	○	IC circuit						
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—	●	—	●	—	—	IC circuit	Relay, PLC		
				2-wire	24 V	12 V	100 V	A93	—	●	—	●	—	—	—			
							12 V	5 V, 12 V	100 V or less	A90	—	●	—	●	—		—	IC circuit
								100 V, 200 V	A54	—	●	—	●	●	—		—	
		Terminal conduit					200 V or less	A64	—	●	—	●	—	—	—		—	PLC
				—	—	A33	—	—	—	—	—	—						
		DIN terminal		Yes	100 V, 200 V	—	A34	—	—	—	—	—	Relay, PLC					
					—	A44	—	—	—	—	—	—						
	Diagnostic indication (2-color indication)	Grommet	—	—	A59W	—	●	—	●	—	—							

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
1 m M (Example) M9NWM
3 m L (Example) M9NWL
5 m Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are applicable auto switches other than listed, refer to page 23 for details.

* For details about auto switches with pre-wired connector, refer to Best Pneumatics No. 2.

* D-A9□, M9□, M9□W, M9□AL are shipped together (but not assembled). (Only auto switch mounting bracket is assembled at the time of shipment.)

Series CS2Y

Designed with a low sliding resistance of the piston, this air cylinder is ideal for applications such as contact pressure control, which requires smooth movements at low pressure.

Low sliding resistance


Min. operating pressure — 0.005 MPa

Auto switch mounting is possible



JIS Symbol

Double acting



Made to Order specifications
(For details, refer to pages 25 to 29.)


Symbol	Specifications
-XA□	Change of rod end shape
-XC3	Special port position
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC26	Double clevis pin/Double knuckle pin with split pin and flat washer
-XC27	Double clevis pin and double knuckle pin made of stainless steel
-XC30	Rod side trunnion mounted on the front of the rod cover
-XC68	Made of stainless steel (With hard chrome plated piston rod)
-XC86	With rod end bracket

For the specifications of cylinders with auto-switch, please refer to pages 21 to 24.

- Minimum stroke for auto switch mounting
- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Operating range
- Auto switch mounting bracket part no.

Application Example

Low friction cylinder is used in combination with precision regulator (Series IR).

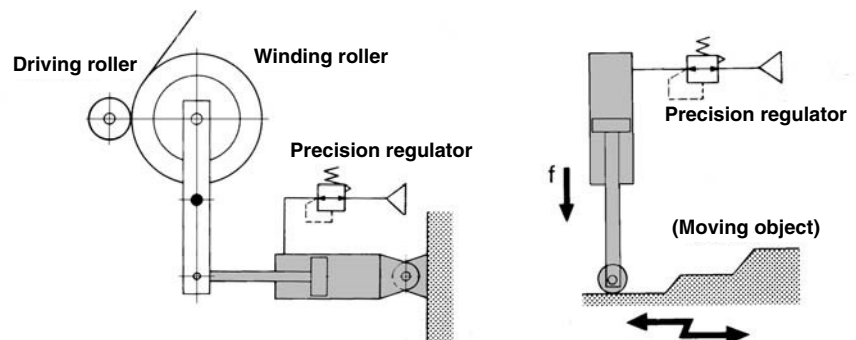

Specifications

Bore size (mm)	125	140	160
Action	Double acting, Single rod		
Direction of low friction	Both directions		
Fluid	Air		
Proof pressure	1.05 MPa		
Maximum operating pressure	0.7 MPa		
Minimum operating pressure	0.005 MPa*		
Ambient and fluid temperature	Without auto switch	0 to 70°C (No freezing)	
	With auto switch	0 to 60°C (No freezing)	
Allowable leakage	Less than 0.5 ℓ/min (ANR)		
Cushion	Without cushion** (manufacturable with cushion)		
Lubrication	Not required (Non-lube)		
Mounting	Basic, Foot, Rod flange, Head flange, Single clevis, Double clevis, Center trunnion		

* If a cushion is used, this value will not include the operating pressure within the cushion stroke.

* If an air cushion is not used, set the energy at the stroke end to 0.36J or less.

Maximum Stroke

				(mm)
Tube material	Aluminum alloy	Carbon steel tube		
Mounting bracket	Basic, Head flange, Single clevis, Double clevis, Center trunnion Rod flange	Basic, Head flange, Single clevis, Double clevis, Center trunnion	Foot, Rod flange	
Bore size (mm)				
125	1000 or less	1000 or less	1600 or less	
140	1000 or less	1000 or less	1600 or less	
160	1200 or less	1200 or less	1600 or less	

Accessory

Mounting		Basic	Foot	Rod flange	Head flange	Single clevis	Double clevis	Center trunnion
Standard equipment	Clevis pin	—	—	—	—	—	●	—
	Rod end nut	●	●	●	●	●	●	●
Option	Single knuckle joint	●	●	●	●	●	●	●
	Double knuckle joint (Knuckle pin, Split pin)	●	●	●	●	●	●	●
	Rod boot	●	●	●	●	●	●	●

Mounting Bracket Part No.

Bore size (mm)	125	140	160
Foot*	CS2-L12	CS2-L14	CS2-L16
Flange	CS2-F12	CS2-F14	CS2-F16
Single clevis	CS2-C12	CS2-C14	CS2-C16
Double clevis**	CS2-D12	CS2-D14	CS2-D16

* Order two foot brackets per cylinder.

** When ordering the double clevis style, the clevis pin and 2 split pins are included as accessories.


Weight

Bore size (mm)		125	140	160
Basic weight	Basic	5.46	6.50	9.07
	Foot	7.49	9.50	12.45
	Rod flange	8.51	12.03	15.80
	Head flange	8.51	12.03	15.80
	Single clevis	8.53	10.79	14.56
	Double clevis	8.99	11.54	15.41
	Trunnion	9.59	12.23	15.47
Additional weight with magnet (With built-in magnet and auto switch)		0.07	0.07	0.08
Additional weight per each 100 mm of stroke		1.55	1.67	2.23
Accessory bracket	Single knuckle	0.91	1.16	1.56
	Double knuckle (With Knuckle pin, Split pin)	1.37	1.81	2.48
	Rod end nut	0.16	0.16	0.23

Calculation: (Example) **CS2Y160-500**

- Basic weight 12.45 (kg)
- Additional weight 2.23 (kg/100 mm)
- Cylinder stroke 500 (mm)
- $12.45 + 2.23 \times 500/100 = 23.60$ (kg)

Sliding Resistance

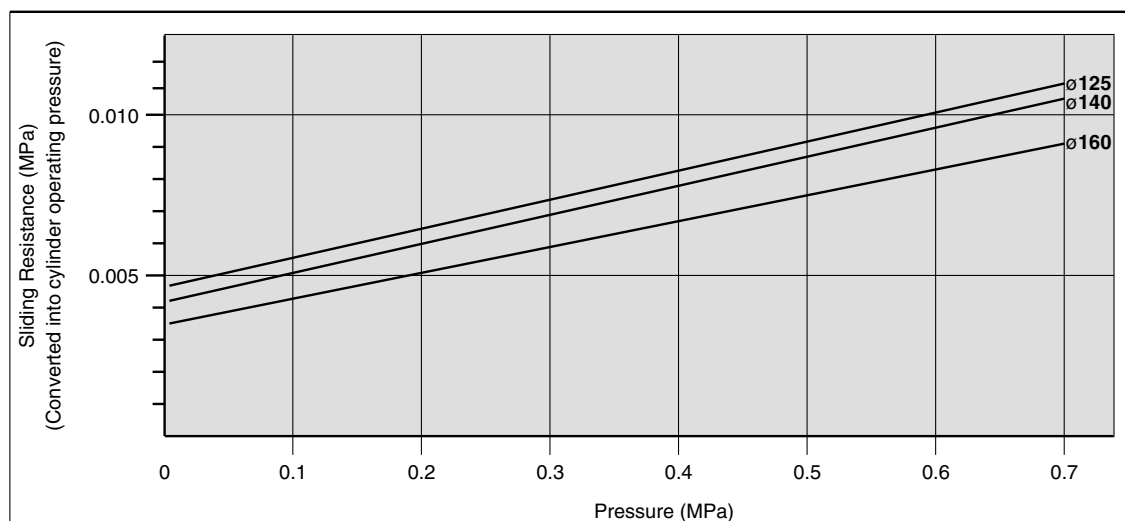

Rod Boot Material

Symbol	Material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Basic



Double Rod Type

Smooth Cylinder

Auto Switch

Made to Order

Construction

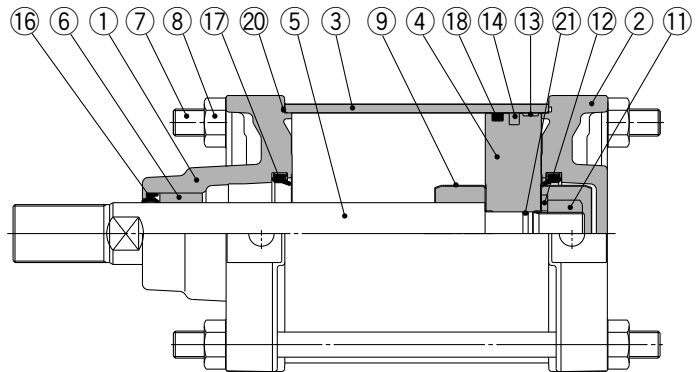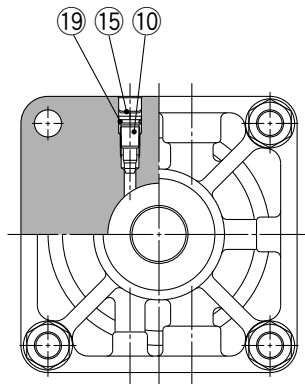

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum die-cast	Chromated
2	Head cover	Aluminum die-cast	Chromated
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston	Aluminum alloy	Chromated
5	Piston rod	Carbon steel	Hard chrome plated
6	Bushing	Oil-impregnated sintered alloy	
7	Tie-rod	Carbon steel	Zinc chromated
8	Tie-rod nut	Rolled steel	Nickel plated
9	Cushion ring	Stainless steel	
10	Cushion valve	Rolled steel	Nickel plated
11	Piston nut	Carbon steel	Nickel plated
12	Flat washer	Carbon steel	Nickel plated
13	Wear ring	Resin	
14	Magnet*	—	
15	Retaining ring	Spring steel	Phosphate coded.
16	Rod seal	NBR	
17	Cushion seal**	Urethane	
18	Piston seal	NBR	
19	Valve seal	NBR	
20	Tube gasket	NBR	
21	Piston gasket	NBR	

* For types with built-in magnet or with auto switch.
 ** Used with cushion only.

Replacement Parts: Seal kit.

Bore size (mm)	Kit no.	Content
125	CS2Y125A-PS	Without cushion
140	CS2Y140A-PS	Consists of Component Part
160	CS2Y160A-PS	Numbers 16, 18, and 20
125	CS2Y125AA-PS	With single-side cushion
140	CS2Y140AA-PS	Consists of Component Part
160	CS2Y160AA-PS	Numbers 16, 17 (two), 18, and 20
125	CS2Y125AR-PS	With single-side cushion
140	CS2Y140AR-PS	Consists of Component Part
160	CS2Y160AR-PS	Numbers 16, 17 (one), 18 and 20.

* Seal kit does not include a grease pack.
 Order with the following part number when only the grease pack is needed.
Grease pack part number: GR-L-005 (5 g), GR-S-010 (10 g), GR-L-150 (150g)


Dimensions

External dimensions are the same as the CS2 standard type. Refer to pages 7 to 10.


Auto Switch Proper Mounting Position (Detection at stroke end) and Its Mounting Height

<Band mounting>

D-A3□ type
D-G3/K3 type

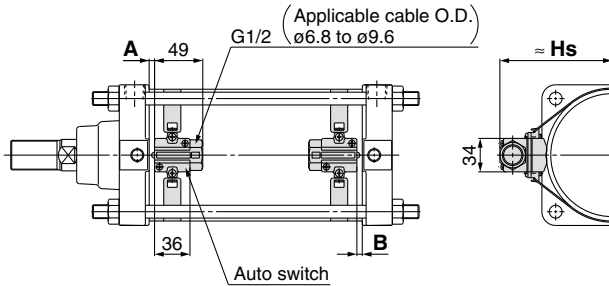


D-A44 type

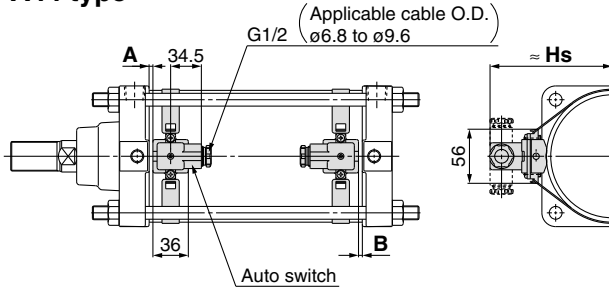


* The indicator light faces the inside.

<Tie-rod mounting>


D-A9□/A9□V type D-Z7□/Z80 type
D-M9□/M9□V type D-Y59□/Y69□/Y7P/Y7PV type
D-M9□W/M9□WV type D-Y7□W/Y7□WV type
D-M9□AL/M9□AVL type D-Y7BAL type

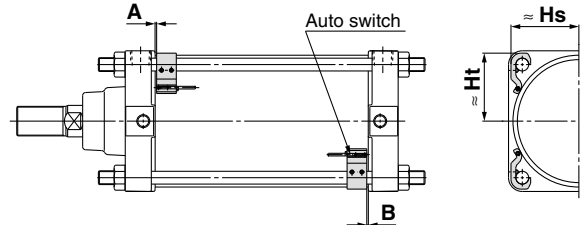

D-A5□/A6□ type

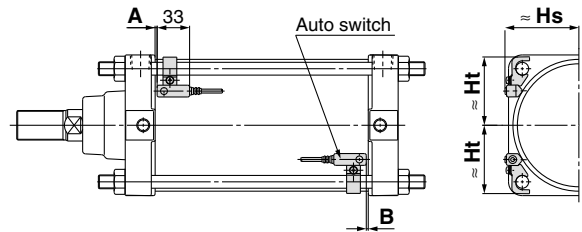

D-F5□/J5□/D-F5NTL type
D-F5BAL/F59F type
D-F5□W/J59W type

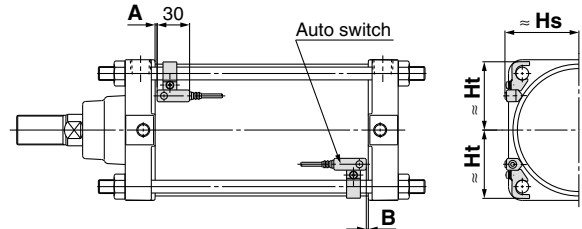

Auto Switch Proper Mounting Position

Auto switch model	D-A9□ D-A9□V		D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AL D-M9□AVL		D-Z7□/Z80 D-Y5□/Y6□ D-Y7P/Y7PV D-Y7□W D-Y7□WV D-Y7BAL		D-A5□ D-A6□ D-A3□ D-A44 D-G39 D-K39		D-A59W		D-F5□W D-J59W D-F5BAL D-F5□ D-J5□ D-F59F		D-F5NTL	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
Bore size														
125	9	8	13	12	6.5	5.5	3	2	7	6	9.5	8.5	14.5	13.5
140	9	8	13	12	6.5	5.5	3	2	7	6	9.5	8.5	14.5	13.5
160	9	8	13	12	6.5	5.5	3	2	7	6	9.5	8.5	14.5	13.5

* Provided as guidelines for auto switch proper mounting position (detection at stroke end). When setting an auto switch, confirm the operation and adjust its mounting position.

Auto Switch Mounting Height

Auto switch model	D-A9□ D-A9□V D-M9□ D-M9□W D-M9□AL		D-M9□V D-M9□WV D-M9□AVL		D-Z7□/Z80 D-Y5□/Y6□ D-Y7P D-Y7PV D-Y7□W D-Y7□WV D-Y7BAL		D-A3□ D-G39 D-K39		D-A44		D-A5□ D-A6□ D-A59W		D-F5□ D-J5□ D-F5□W D-J59W D-F5BAL D-F59F D-F5NTL	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs		Hs		Hs	Ht	Hs	Ht
Bore size														
125	69	69.5	71.5	69.5	69	69.5	116		126		75.5	69.5	74.5	70
140	76	76	77.5	76	76	76	124		134		81	76.5	80	76.5
160	85	85	86	85	85	85	134.5		144.5		89	87.5	88	87.5

Minimum Stroke for Auto Switch Mounting

n: Number of auto switches (mm)

Auto switch model	Number of auto switches mounted	Mounting brackets other than center trunnion	Center trunnion		
			ø125	ø140	ø160
D-A9□	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	15	100	105	110
	With n pcs.	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-A9□V	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	10	75	80	85
	With n pcs.	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-M9□ D-M9□W	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	15	105	110	115
	With n pcs.	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-M9□V D-M9□WV	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	10	80	85	90
	With n pcs.	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-M9□AL	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	20	115	120	
	With n pcs.	$20 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$120 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	
D-M9□AVL	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	15	90	95	
	With n pcs.	$15 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$95 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	
D-A5□/A6□ D-A59W D-F5□/J5□ D-F5□W D-J59W D-F5BAL D-F59F	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	25	125	135	
	With n pcs. (Same surface)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$125 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$135 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	
D-F5NTL	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	35	145	155	
	With n pcs. (Same surface)	$35 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$145 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$155 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	
D-A3□ D-G39 D-K39	With 2 pcs.	Different surfaces	35	110	
		Same surface	100		
	With n pcs.	Different surfaces	$35 + 30(n-2)$	$110 + 30(n-2)$ (n = 2, 4, 6, 8...)	
		Same surface	$100 + 100(n-2)$	$110 + 100(n-2)$ (n = 2, 4, 6, 8...)	
D-A44	With 2 pcs.	With 1 pc.	15	110	
		Different surfaces	35	110	
		Same surface	55		
	With n pcs.	Different surfaces	$35 + 30(n-2)$	$110 + 30(n-2)$ (n = 2, 4, 6, 8...)	
		Same surface	$55 + 55(n-2)$	$110 + 50(n-2)$ (n = 2, 4, 6, 8...)	
	With 1 pc.		15	110	
D-Z7□ D-Z80 D-Y59□ D-Y7P D-Y7□W	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	15	105	110	115
	With n pcs.	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-Y69□ D-Y7PV D-Y7□WV	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	10	90	95	100
	With n pcs.	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$95 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$100 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)
D-Y7BAL	With 2 pcs. (Different surfaces, Same surface), With 1 pc.	20	115	120	125
	With n pcs.	$20 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8...)	$115 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$120 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)	$125 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16...)

Operating Range

Auto switch model	Bore size (mm)		
	125	140	160
D-A9□/A9□V	12	12.5	11.5
D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	6	6.5	6.5
D-Z7□/Z80	14	14.5	13
D-A3□/A44 D-A5□/A6□	10	10	10
D-A59W	17	17	17
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BAL	12	13	7
D-F5□/J5□/F5□W D-J59W/F5BAL D-F5NTL/F59F	5	5	5.5
D-G39/K39	11	11	10

* Since this is a guideline including hysteresis, not meant to be guaranteed.
(Assuming approximately ±30% dispersion.)
There may be the case it will vary substantially depending on an ambient environment.

Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)		
	ø125	ø140	ø160
D-A9□/A9□V D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	BS5-125	BS5-125	BS5-160
D-A5□/A6□ D-A59W D-F5□/J5□ D-F5NTL D-F5□W/J59W D-F5BAL/F59F	BT-12	BT-12	BT-16
D-A3□/A44 D-G39/K39	BS1-125	BS1-140	BS1-160
D-Z7□/Z80 D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BAL	BS4-125	BS4-125	BS4-160

[Mounting screws set made of stainless steel]


The following set of mounting screws made of stainless steel (including set screws) is also available. Use it in accordance with the operating environment. (Please order the auto switch mounting bracket separately, since it is not included.)

BBA1: For D-A5, A6, F5, J5 type

“D-F5BAL” auto switch is set on the cylinder with the stainless steel screws above when shipped.

When only an auto switch is shipped independently, “BBA1” screws are attached.

Note) When using the D-M9□AL/M9□AVL or Y7BAL model, do not use the steel set screw which is included with the auto switch mounting bracket in the above table (BS5-□□□, BS4-□□□). Please separately prepare the stainless steel screw set (BBA1), and select and use the M4 x 8L stainless steel set screw included in BBA1.



Note 1) Refer to Best Pneumatics No. 2 for the details of BBA1 screws.

* Shows an example of mounting the D-A9□(V), M9□(V), M9□W(V), M9□A(V)L model.

Other than the applicable auto switches listed in “How to Order”, the following auto switches can be mounted. For detailed specifications, refer to Best Pneumatics No. 2.

Type	Model	Electrical entry (Direction)	Features
Reed auto switch	D-A90V	Grommet (Perpendicular)	Without indicator light
	D-A93V, A96V		—
	D-Z73, Z76	Grommet (in-line)	Without indicator light
	D-A53, A56		—
	D-A67		Without indicator light
	D-Z80		—
Solid state auto switch	D-F59, F5P, J59	Grommet (in-line)	—
	D-Y59A, Y59B, Y7P		2-color indication
	D-F59W, F5PW, J59W		Water resistant (2-color indication)
	D-Y7NW, Y7PW, Y7BW		With timer
	D-F5BAL, Y7BAL		—
	D-F5NTL		—
	D-M9NV, M9PV, M9BV	Grommet (Perpendicular)	2-color indication
	D-Y69A, Y69B, Y7PV		Water resistant (2-color indication)
	D-M9NWV, M9PWV, M9BWV		—
	D-Y7NWV, Y7PWV, Y7BWV		2-color indication
	D-M9NAVL, M9PAVL, M9BAVL		Water resistant (2-color indication)


* With pre-wired connector is available for solid state auto switches. For details, refer to Best Pneumatics No. 2.

* Normally closed (NC = b contact), solid state switches (D-F9G, F9H, Y7G, Y7H type) are also available. For details, refer to Best Pneumatics No. 2.


Auto Switch Connections and Examples

Basic Wiring


Solid state 3-wire, NPN




Solid state 3-wire, PNP






2-wire (Solid state)



2-wire (Reed)

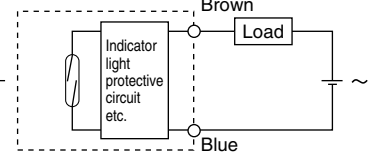


(Power supplies for switch and load are separate.)

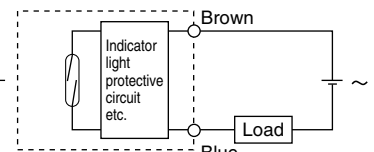


Example of Connection to PLC (Programmable Logic Controller)

• Sink input specification 3-wire, NPN

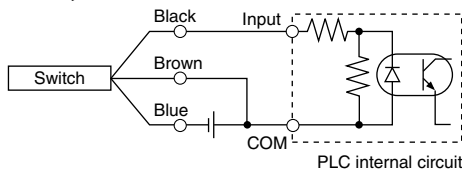


• Source input specification 3-wire, PNP

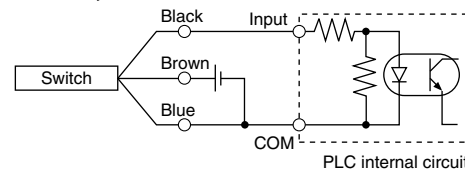


Connect according to the applicable PLC input specifications, since the connection method will vary depending on the PLC input specifications.

2-wire

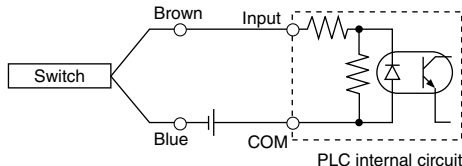


2-wire

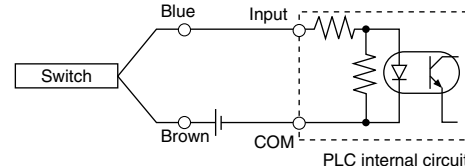


Example of AND (Serial) and OR (Parallel) Connection

• 3-wire


AND connection for NPN output (using relays)

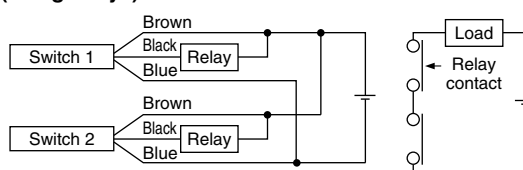

AND connection for NPN output (performed with switches only)

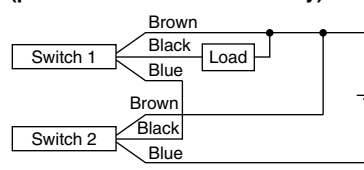


OR connection for NPN output

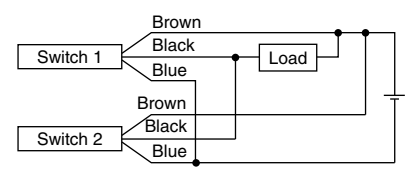

The indicator lights will illuminate when both switches are turned ON.


2-wire with 2-switch AND connection

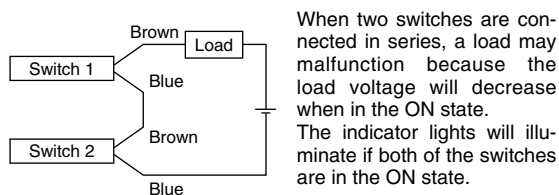

$$\begin{aligned} \text{Load voltage at ON} &= \text{Power supply} - \text{Residual voltage} \times 2 \text{ pcs.} \\ &= 24 \text{ V} - 4 \text{ V} \times 2 \text{ pcs.} \\ &= 16 \text{ V} \end{aligned}$$

Example: Power supply is 24 VDC.
Internal voltage drop in switch is 4 V.

2-wire with 2-switch OR connection



$$\begin{aligned} \text{Load voltage at OFF} &= \text{Leakage current} \times 2 \text{ pcs.} \times \text{Load impedance} \\ &= 1 \text{ mA} \times 2 \text{ pcs.} \times 3 \text{ k}\Omega \\ &= 6 \text{ V} \end{aligned}$$

Example: Load impedance is 3 kΩ.
Leakage current from switch is 1 mA.

(Solid state)

When two switches are connected in parallel, a malfunction may occur because the load voltage will increase when in the OFF state.

(Reed)

Because there is no current leakage, the load voltage will not increase when turned OFF. However, depending on the number of switches in the ON state, the indicator lights may sometimes dim or not light because of the dispersion and reduction of the current flowing to the switches.

Air Cylinder / Series CS2

Simple Specials

Please order through the Simple Specials system.

1 Change of Rod End Shape

Symbol

-XA0 to XA30

Applicable Series

Series	Description	Model	Action	Symbol for applicable patterns
CS2	Standard type	CS2	Double acting single rod	XA0 to 30
		CS2W	Double acting double rod	XA0 to 30
	Smooth cylinder	CS2Y	Double acting single rod	XA0 to 30

Precautions

- 1) Dimensions, tolerance and finish that are not displayed here are the same as standard types, or set at the discretion of SMC.
- 2) The standard dimensions with * will be as follows to the following rod diameter (D).
Please specify if changing the dimensions.
 $D \leq 6 \rightarrow D-1 \text{ mm}$ $6 < D \leq 25 \rightarrow D-2 \text{ mm}$ $D > 25 \rightarrow D-4 \text{ mm}$
- 3) In the case of double rod type and single acting retraction type, enter the dimensions for when the rod is retracted.
- 4) Only the single side of a double rod is able to manufacture.

Symbol: A0	Symbol: A1	Symbol: A2	Symbol: A3	Symbol: A4
Symbol: A5	Symbol: A6	Symbol: A7	Symbol: A8	Symbol: A9
Symbol: A10	Symbol: A11	Symbol: A12	Symbol: A13	Symbol: A14
Symbol: A15	Symbol: A16	Symbol: A17	Symbol: A18	Symbol: A19
Symbol: A20	Symbol: A21	Symbol: A22	Symbol: A23	Symbol: A24
Symbol: A25	Symbol: A26	Symbol: A27	Symbol: A28	Symbol: A29
Symbol: A30				

Basic

Double Rod Type

Smooth Cylinder

Auto Switch

Made to Order

Air Cylinder / Series CS2

Made to Order Specifications 1

Contact SMC for detailed dimensions, specifications, and lead times.



2 Special Port Positions


Symbol
-XC3

The positions of ports and cushion valves on the rod cover and head cover are changed from those of the standard type.

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order

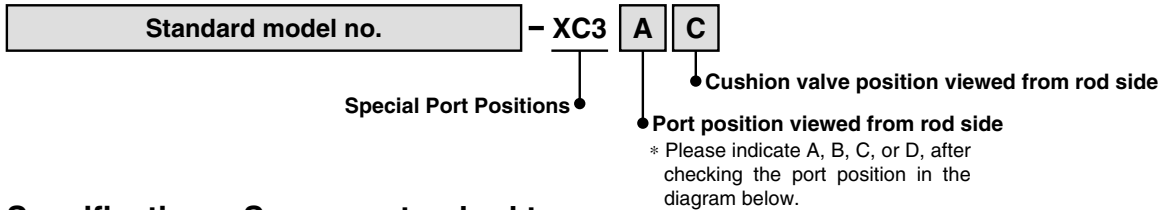

Specifications: Same as standard type

Relation between Port Positions and Cushion Valve Positions (Rod chamfer)

Series	Symbols according to mounting bracket (relation of positions)						
CS2							
	Basic	Foot	Rod flange	Head flange	Single clevis	Double clevis	Center trunnion

(1) The symbol A indicating the port or cushion valve position is assigned to the top position viewed from the rod side, with B, C, and D to the other positions in order when rotating clockwise.

(2) The optional combination of the port and cushion valve is available only when the same positional change is applied to the rod cover and head cover.

(3) The symbol -XC3AA indicates the standard specification so an optional specification with this part number does not exist.

3 Change of Trunnion Bracket Mounting Position

Symbol
-XC14

The position for mounting the trunnion bracket on the cylinder can be moved from the standard mounting position to any desired position.

Applicable Series


Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
		CS2W	Double acting double rod
	Smooth cylinder	CS2Y	Double acting single rod

Precautions

- Specify "Z + 1/2 stroke" in case the trunnion bracket position is not -XC14A, -XC14B or trunnion is not a center trunnion.
- SMC will make appropriate arrangements if no dimensions, tolerance, or finish instructions are given in the diagram.
- The possible range of trunnion bracket mounting positions is indicated in the table below.
- Some trunnion mounting positions do not allow auto switch mounting. Consult SMC for more information.
- Series CS2 has a greater range of trunnion bracket mounting positions than Series CS1, so the value of "Z + 1/2 stroke" at -XC14A and -XC14B is different.

Series CS2

Symbol		Z + 1/2 stroke				
Bore Size	For -XC14A	For -XC14B	For -XC14		Reference for standard (center trunnion)	Minimum Stroke
			Minimum	Maximum		
125	165.5	152.5 + Stroke	166	152 + Stroke	159 + 1/2 stroke	25
140	168	150 + Stroke	168.5	149.5 + Stroke	159 + 1/2 stroke	30
160	186	160 + Stroke	186.5	159.5 + Stroke	173 + 1/2 stroke	35

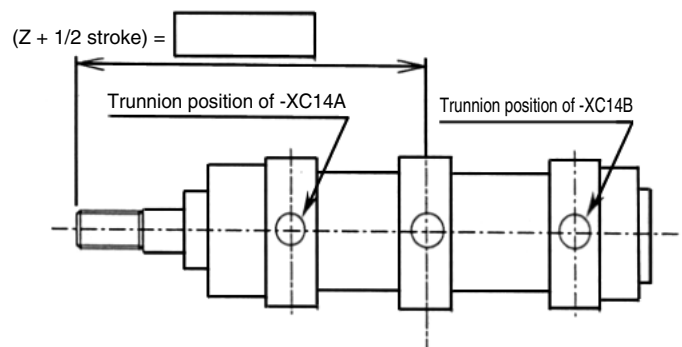

4 Change of Tie Rod Length

Symbol
-XC15

Standard M dimension, the tie rod length of the air cylinder, is changed.

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
		CS2W	Double acting double rod
	Smooth cylinder	CS2Y	Double acting single rod


Precautions

- 1) When ordering, specify the required M dimension with the part number.
- 2) SMC will make appropriate arrangements if no dimensions, tolerance, or finish instructions are given in the diagram.
- 3) The possible range of tie-rod length is listed in the table below.
- 4) The M dimension of the bracket mounting side of Flange (F, G), Clevis (C, D) types cannot be specified.

Changeable Range of Tie Rod Length

(mm)

Model	CS2											
Bore size	125				140				160			
Mounting bracket	L	B	F	G, C, D, T	L	B	F	G, C, D, T	L	B	F	G, C, D, T
M minimum	20			12	21			12	23			14
M maximum	270											

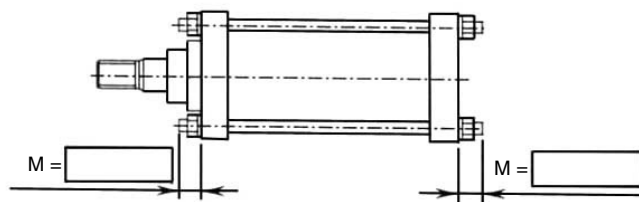

5 Double Clevis Pin/Double Knuckle Pin with Split Pin and Flat Washer

Symbol
-XC26

Flat washer was added to the double clevis type (a mounting type) or the double knuckle joint (an accessory).

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order

• Product

CS2D Standard model no. — XC26
 • Double Clevis
 With clevis pin, split pin, flat washer

• Parts Ass'y

CS2 — D 12 — XC26
 • Double Clevis
 • With clevis pin, split pin, flat washer
 • Bore size

12	125 mm
14	140 mm
16	160 mm

Y — 12A, 14A, 16A — XC26
 • Double clevis knuckle joint
 With knuckle joint pin, split pin, flat washer

IY — 12, 14, 16 — XC26
 • Clevis pin/Knuckle pin
 With clevis pin, knuckle pin, split pin, flat washer


Specification

Mounting bracket	Double clevis type (D), double knuckle joint only
Changed parts	Clevis pin, knuckle pin, flat washer
Other specifications	Same as standard type

Dimensions

(Dimensions not listed below are the same as those of the standard type.)


Double clevis

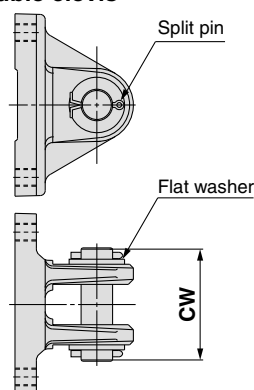

- * The mounting bracket itself will be shipped together with the split pin, clevis pin and flat washer (but not assembled).
- * Mounting is the same as standard types.

Bore size (mm)	CW
ø125	90
ø140	104
ø160	113

Double Knuckle Joint

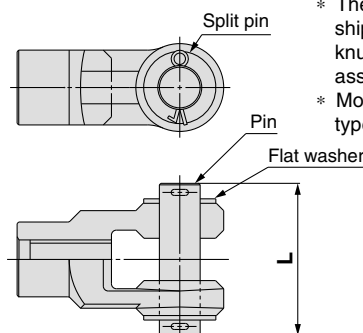

- * The mounting bracket itself will be shipped together with the split pin, knuckle pin and flat washer (but not assembled).
- * Mounting is the same as standard types.

Bore size (mm)	L
ø125	90
ø140	104
ø160	113

Air Cylinder / Series CS2

Made to Order Specifications 2

Contact SMC for detailed dimensions, specifications, and lead times.




6 Double Clevis Pin and Double Knuckle Pin Made of Stainless Steel -XC27

To prevent the rotating part of a double clevis, which is a bracket, or double knuckle joint, which is an accessory, from rusting the materials of the pin and the retaining ring (split pin) have been changed to stainless steel.

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order

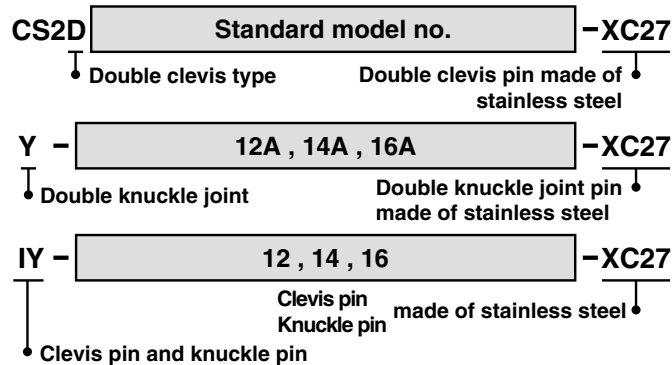


Specification

Mounting bracket	Double clevis type (D), double knuckle joint only
Changed parts	Clevis pin, knuckle pin, split pin
Other specifications	Same as standard type

Dimensions: Same as standard type

* The mounting bracket itself will be shipped together with the split pin, clevis pin, and knuckle joint pin.

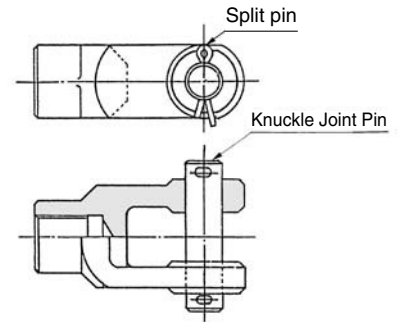

* Mounting as the same as standard size.


7 Rod Side Trunnion Mounted on the Front of the Rod Cover. -XC30

A cylinder with a reduced distance between the fulcrum and the rod end, which has been realized by mounting the trunnion bracket on the front of the cylinder's rod cover.

Applicable Series


Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order

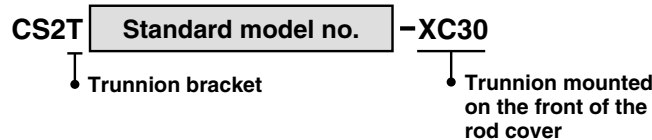

Specifications: Same as standard type

Dimensions (Dimensions other than below are the same as standard type)

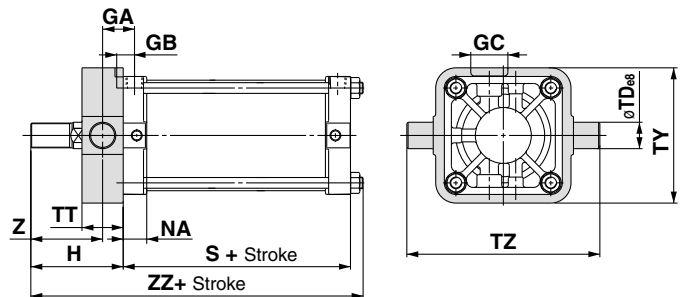

Bore size (mm)	GA	GB	GC	NA	S	TD _{e8}	TT	TY	TZ	H	Z	ZZ
ø125	38	23	45	28.5	96	32 ^{-0.050} _{-0.089}	50	164	234	112	87	221
ø140	40.5	23	45	28.5	96	36 ^{-0.050} _{-0.089}	55	184	262	112	84.5	221
ø160	46	26	50	32.5	104	40 ^{-0.050} _{-0.089}	60	204	292	122	92	241


8 Made of Stainless Steel (With hard chrome plated piston rod) -XC68

Applicable for uses where rust and corrosion are expected, such as by immersing in water.

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order



Made of stainless steel (with hard chrome plated piston rod)

Specifications

Parts changed to stainless steel	Piston rod
Other specifications and dimensions	Same as standard type

Maximum Stroke (mm)

Series	Double functioning single rod	Double functioning single rod with rod boot
CS2	1600	1400

9 With Rod End Bracket

Symbol
-XC86

The rod end bracket has been included to simplify the ordering procedure.

Applicable Series

Series	Description	Model	Action
CS2	Standard type	CS2	Double acting single rod
	Smooth cylinder	CS2Y	Double acting single rod

How to Order

Standard no. for each series —XC86 **A**



With rod end bracket

Suffix


A	With rod end bracket
B	With double knuckle joint
C	With double knuckle joint
D	With double knuckle joint and rod end bracket
E	With double knuckle joint and rod end bracket

Note 1) The rod end bracket will be shipped together.

Note 2) 1 pin and 2 split pins will be shipped as accessories to the double knuckle joint.


Dimensions (Dimensions other than below are the same as standard type.)

Series CS2 XC86B, XC86C



Symbol Bore size (mm)	H	A	α	L ₁	H ₁	Applicable knuckle joint part number	
						I type single knuckle	Y type double knuckle
125	110	50	3.5	100	156.5	I-12A	Y-12A
140	110	50	3.5	105	161.5	I-14A	Y-14A
160	120	56	3.5	110	170.5	I-16A	Y-16A

Series CS2 XC86D, XC86E

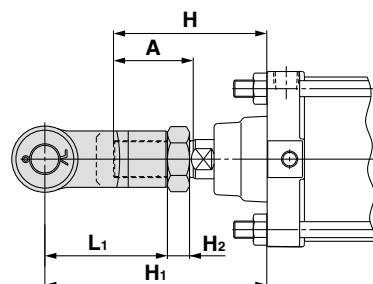

Symbol Bore size (mm)	H	A	L ₁	H ₁	H ₂	Applicable knuckle joint part number		Applicable rod end nut
						I type single knuckle	Y type double knuckle	
125	125	65	100	181	18	I-12A	Y-12A	NT-12
140	125	65	105	186	18	I-14A	Y-14A	NT-12
160	140	76	110	198	21	I-16A	Y-16A	NT-16

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1), and other safety regulations.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- *1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots - Safety.
etc.

Warning

- The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.**
Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.
- Only personnel with appropriate training should operate machinery and equipment.**
The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.
- Do not service or attempt to remove product and machinery/equipment until safety is confirmed.**
 - The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 - When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 - Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.**
 - Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 - Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
 - An application which could have negative effects on people, property, or animals requiring special safety analysis.
 - Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

- The product is provided for use in manufacturing industries.**
The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

Limited warranty and Disclaimer

- The warranty period of the product is 1 year in service or 1.5 years after the product is delivered.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

*2) **Vacuum pads are excluded from this 1 year warranty.**
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

- The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Record of changes

- Edition B** * Addition of double rod type and Smooth cylinder to Series CS2
* 9 Made to Order specifications added

NZ

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

SMC Corporation

Akihabara UDX 15F,
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 Fax: 03-5298-5362
URL <http://www.smcworld.com>
© 2009 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice
and any obligation on the part of the manufacturer.

D-DN

1st printing LY printing NZ 6000SZ Printed in Japan.

This catalog is printed on recycled paper with concern for the global environment.