

# High-Precision Digital Pressure Switch

## Series ZSE40(F)/ISE40



### With anti-chattering function

The pressure values measured within the response time that are selected by the user are averaged. By comparing this average pressure value with the set pressure value, switch output is determined.

### With auto shift function

Able to transmit the output signal of a switch by not reflecting the fluctuations of the supply pressure.

### Compound pressure (ZSE40F)

Able to detect the adsorption confirmation pressure (for vacuum pressure) and the vacuum release pressure (for positive pressure) with one pressure switch.

### 3 types of piping

A wide variety of piping allows installation in various locations.

### Repeatability

$\pm 0.2\%$  F.S.  $\pm 1$  digit or less

### IP65 compliant

Dusttight, Low jetproof type

### For panel mount

Dedicated adaptor makes it easier to assemble in a panel-mount application.

ZSE  
ISE

ZSP

PS

ISA

PSE

IS

ISG

ZSM



# High-Precision Digital Pressure Switch

# Series ZSE40□/ISE40

## How to Order

### Set pressure range

Nil	-0.100 to 1.000 MPa	For positive pressure
-----	---------------------	-----------------------

For Positive Pressure

ISE40



For Vacuum/Compound Pressure

ZSE40



### Set pressure range

Nil	10.0 to -101.3 kPa	For vacuum pressure
F	-100.0 to 100.0 kPa	For compound pressure

### Made to Order

Nil	None
X119	Extended auto shift specifications
X129	Space saving

Refer to page 716 for details.

### Piping specifications

<p><b>O1:</b> R1/8 (with M5 female threads) <b>T1:</b> NPT1/8 (with M5 female threads)</p> <p>R1/8, NPT1/8 M5 x 0.8 female threads</p>	<p><b>W1:</b> Rc1/8 <b>*WF1:</b> G1/8</p> <p>Reverse pressure two directions</p> <p>Rc1/8, G1/8 Rc1/8, G1/8</p>
<p><b>*C4:</b> With ø4 One-touch fitting <b>*C6:</b> With ø6 One-touch fitting</p> <p>Wall mount</p> <p>ø4, ø6 One-touch fitting</p>	<p><b>*M5:</b> M5 x 0.8 (female threads)</p> <p>Wall mount</p> <p>M5 x 0.8</p>

\* Optional

### Piping Specifications/Combination of Options Available

Description	Symbol	Piping specification						
		O1	T1	W1	WF1	C4	C6	M5
Bracket A	A	○	○	○	○	×	×	×
Bracket B	B	×	×	○	○	×	×	×
Bracket D	D	○	○	○	○	×	×	×
Panel mounting	E	○	○	○	○	○	○	○
Panel mount + Front protective cover	F	○	○	○	○	○	○	○

○: Combination available ×: Combination not available

### Input/Output specifications

22	NPN open collector 2 outputs + analog output
30	NPN open collector 2 outputs + auto shift input
62*	PNP open collector 2 outputs + analog output
70*	PNP open collector 2 outputs + auto shift input

\* Optional

### Note

When equipped with auto shift function, the following ranges can be set.

Set pressure range	Setting range
-100.0 to 100.0 kPa	-100.0 to 100.0 kPa
10.0 to -101.3 kPa	-101.3 to 101.3 kPa
-0.1 to 1.000 MPa	-1.000 to 1.000 MPa

### Lead wire length

Nil	0.6 m
L	3 m

### Option

Nil	None	
A	Bracket A	(ZS-24-A)
B	Bracket B	(ZS-24-B)
D	Bracket D	(ZS-24-D)
	Please confirm the external dimensions.	
E	Panel mount	(ZS-22-A)
F	Panel mount + Front protective cover	(ZS-24-C)

\* When optional parts only are required, order with the part numbers inside ( ).

### Unit specifications

Nil	With unit switching function
M	SI units only (Note)

Note) Fixed units

For vacuum/compound pressure: kPa  
For positive pressure: MPa

# High-Precision Digital Pressure Switch *Series ZSE40□/ISE40*

## Specifications

Model	ZSE40F (Compound pressure)	ZSE40 (Vacuum pressure)	ISE40 (Positive pressure)
<b>Rated pressure range</b>	-100.0 to 100.0 kPa	0.0 to -101.3 kPa	0.000 to 1.000 MPa
<b>Set pressure range</b>	-100.0 to 100.0 kPa	10.0 to -101.3 kPa	-0.100 to 1.000 MPa
<b>Extended analog output range</b>	—	10.0 to 0 kPa	-0.100 to 0 MPa
<b>Withstand pressure</b>	500 kPa		1.5 MPa
<b>Set pressure resolution</b>	kPa	0.1	—
	MPa	—	0.001
<b>Applicable fluid</b>	Air, Non-corrosive/Non-flammable gas		
<b>Power supply voltage</b>	12 to 24 VDC ±10%, Ripple (p-p) 10% or less (with power supply polarity protection)		
<b>Current consumption</b>	55 mA or less		
<b>Switch output</b>	NPN or PNP open collector output: 2 output		
<b>Switch output</b>	<b>Max. load current</b>	80 mA	
	<b>Max. applied voltage</b>	30 V (with NPN output)	
	<b>Residual voltage</b>	1 V or less (with load current of 80 mA)	
	<b>Response time</b>	2.5 ms or less (Response time selections with anti-chattering function: 24 ms, 192 ms and 768 ms)	
	<b>Short circuit protection</b>	With short-circuit protection	
<b>Repeatability</b>	±0.2% F.S. ±1 digit or less		
<b>Hysteresis</b>	<b>Hysteresis mode</b>	Variable (0 or above)	
	<b>Window comparator mode</b>	Fix (3 digits)	
<b>Display</b>	3 1/2-digit, 7 segment indicator (Sampling frequency: 5 times/sec)		
<b>Display accuracy</b>	±2% F.S. ±1 digit or less (With ambient temperature of 25°C)		
<b>Operation indicator light</b>	Green LED (OUT1: Lights when ON), Red LED (OUT2: Lights when ON)		
<b>Analog output</b> <small>Note 1)</small>	Output voltage: 1 to 5 V ±5% F.S. or less (in rated pressure range) Linearity: ±1% F.S. or less Output impedance: Approx. 1 kΩ	Output voltage: 1 to 5 V ±2.5% F.S. or less (in rated pressure range) 0.6 to 1 V ±5% F.S. or less (in extended analog output range) Linearity: ±1% F.S. or less Output impedance: Approx. 1 kΩ	
	<b>Auto shift input</b> <small>Note 2)</small> No-voltage input (reed or solid state), input 5 ms or more		
<b>Environmental resistance</b>	<b>Enclosure</b>	IP65	
	<b>Ambient temperature range</b>	Operating: 0 to 50°C, Stored: -10 to 60°C (with no condensation or freezing)	
	<b>Ambient humidity range</b>	Operating/Stored: 35 to 85% RH (with no condensation)	
	<b>Withstand voltage</b>	1000 VAC for 1 min. between live parts and case	
	<b>Insulation resistance</b>	50 MΩ or more (at 500 VDC) between live parts and case	
	<b>Vibration resistance</b>	10 to 500 Hz at the smaller of amplitude 1.5 mm or acceleration 98 m/s <sup>2</sup> in X, Y, Z directions for 2 hrs. each (De-energized)	
<b>Impact resistance</b>	980 m/s <sup>2</sup> in X, Y, Z directions 3 times each (De-energized)		
<b>Temperature characteristics</b>	±2% F.S. or less of pressure measured at 25°C		
<b>Port size</b>	01: R1/8, M5 x 0.8, T1: NPT1/8, M5 x 0.8, W1: Rc1/8 C4: With ø4 One-touch fitting, C6: With ø4 One-touch fitting, M5: M5 female threads		
<b>Lead wires</b>	Oil-resistant cabtire cord 5 cores, ø3.5, Cross section: 0.15 mm <sup>2</sup> , Conductor O.D.: 0.97 mm		
<b>Mass</b>	01/T1 types approx. 60 g, W1 type approx. 80 g, C4/C6/M5 types approx. 92 g (each including 0.6 m lead wires)		
<b>Standard</b>	Compliant with CE marking		

Note 1) In case of ZSE40F/ZSE40/ISE40-□-<sup>22</sup>/<sub>62</sub>  
 Note 2) In case of ZSE40F/ZSE40/ISE40-□-<sup>30</sup>/<sub>70</sub>

Note:

When equipped with auto shift function, the following ranges can be set.

Model	Set pressure range
ZSE40F-□- <sup>30</sup> / <sub>70</sub>	-100.0 to 100 kPa
ZSE40-□- <sup>30</sup> / <sub>70</sub>	-101.3 to 101.3 kPa
ISE40-□- <sup>30</sup> / <sub>70</sub>	-1.0000 to 1.000 MPa

## Function

Various additional functions are available for easy measurement, switch operation and confirmation of measured values suitable for the conditions of the measured fluid.

<b>Auto shift function</b> <small>Note 1)</small>	Can correct the pressure set point value of switch output according to fluctuations in the primary pressure.
<b>Anti-chattering function</b>	Prevents possible malfunction due to sudden fluctuations in the primary pressure by adjusting the response time.
<b>Key lock function</b>	Key operation can be locked to prevent any incorrect function of the operation switch.
<b>Peak hold function</b> <small>Note 2)</small>	Can retain the maximum pressure value displayed during measurement.
<b>Bottom hold function</b> <small>Note 2)</small>	Can retain the minimum pressure value displayed during measurement.
<b>Zero-out function</b>	The pressure display can be set at zero when the pressure is open to the atmosphere.
<b>Unit conversion</b> <small>Note 1)</small>	Can convert the display value.


Note 1) Select and order by specifying the types and models.

Note 2) Display blinks when using the peak and bottom hold functions.


# Series ZSE40□/ISE40

## Calibration Procedures


### Setting procedure

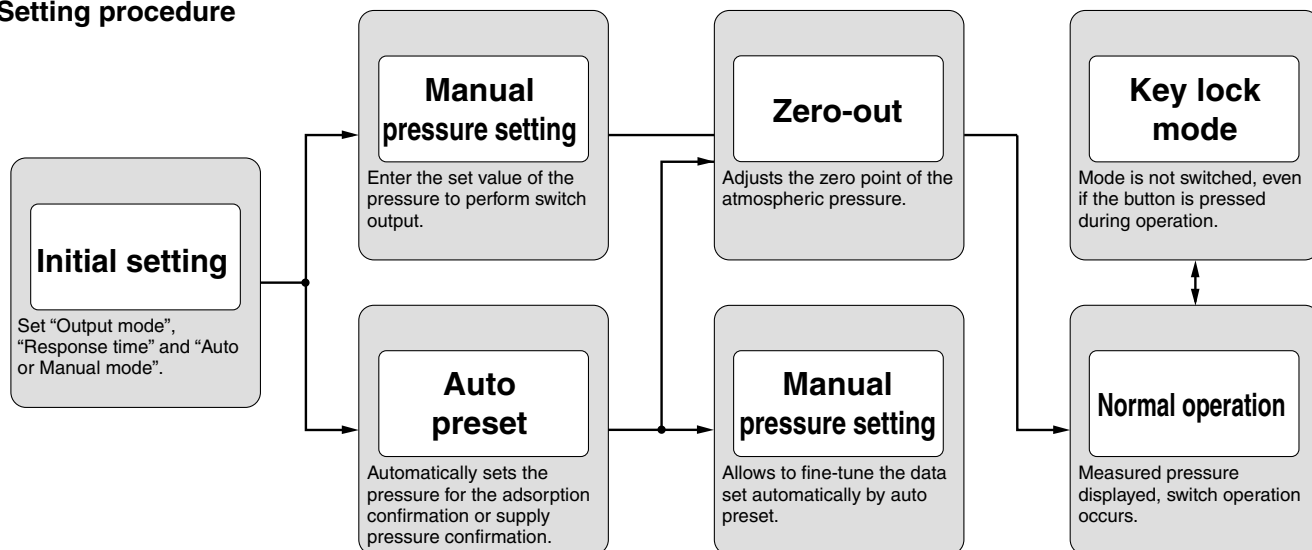

## Description

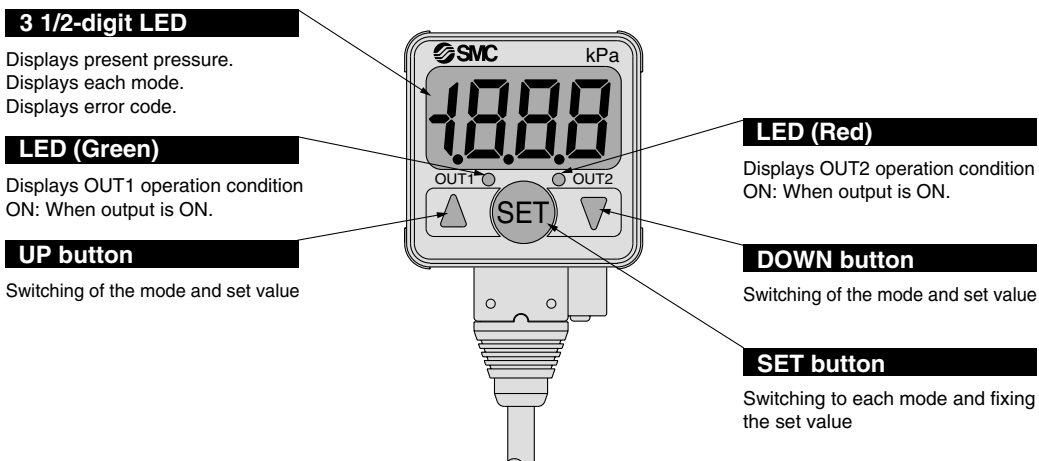

## Output Type

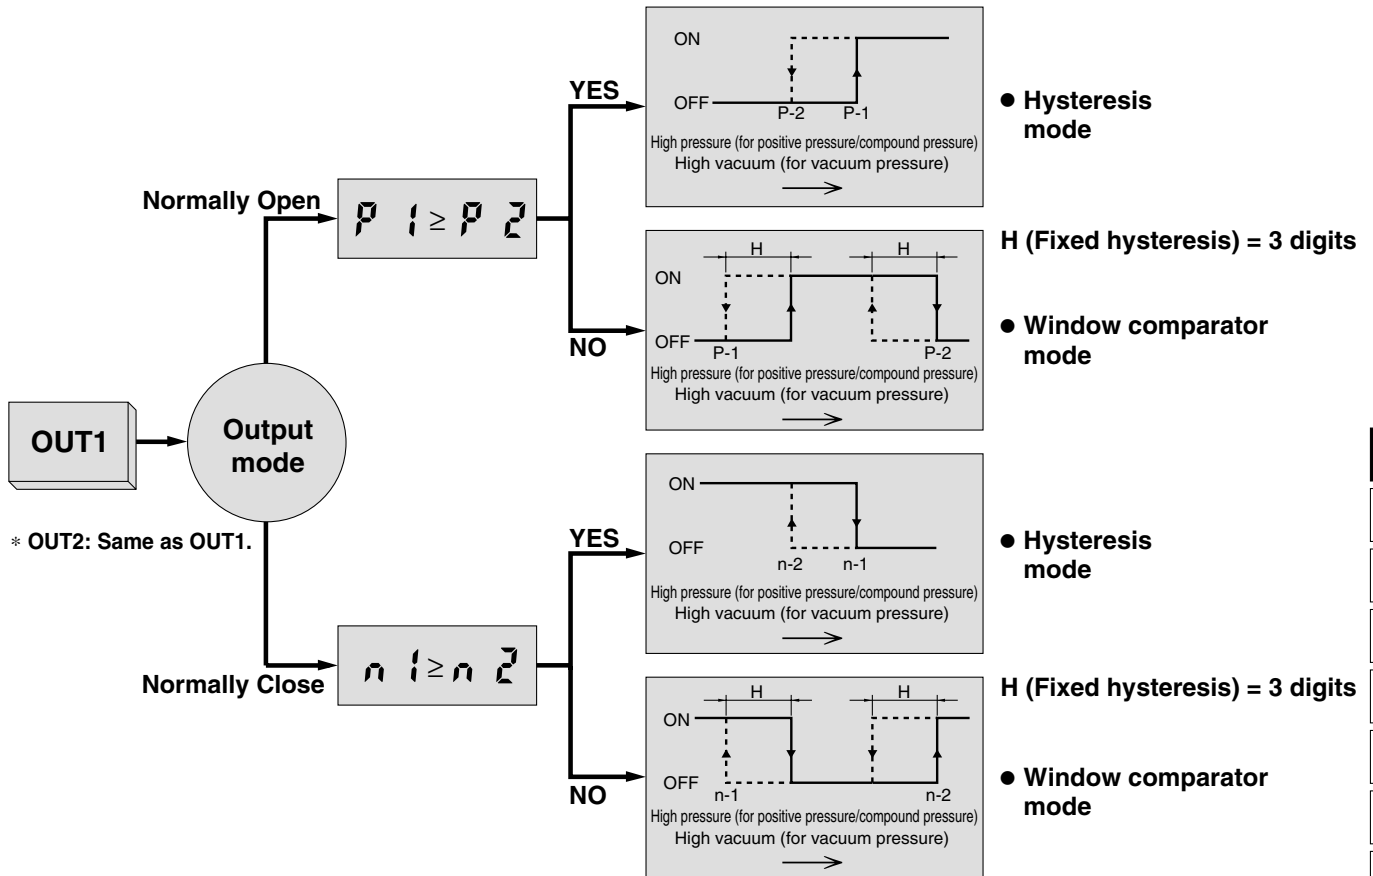


Note) When in hysteresis mode and window comparator mode, setting is determined automatically by comparing the small and large set pressure values  $P_1, P_2 (n_1, n_2)$ .

ZSE
ISE
ZSP
PS
ISA
PSE
IS
ISG
ZSM

## Internal Circuits and Wiring Examples


### ZSE40(F)/ISE40-□-22(L)-(M)

With analog output

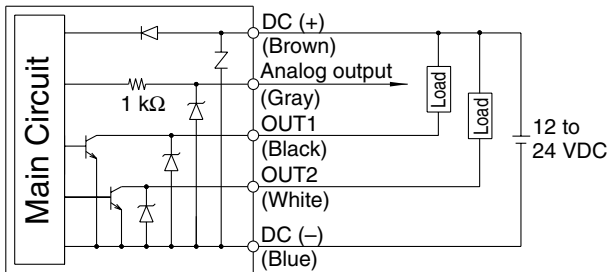


### ZSE40(F)/ISE40-□-30(L)-(M)

With auto shift input

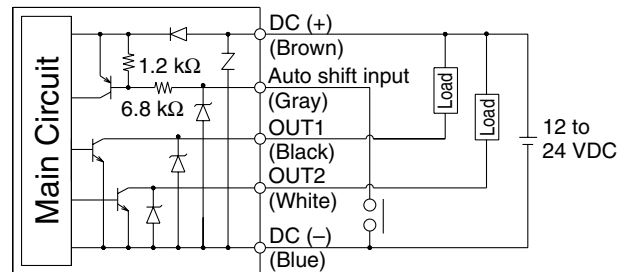


### ZSE40(F)/ISE40-□-62(L)-(M)

With analog output

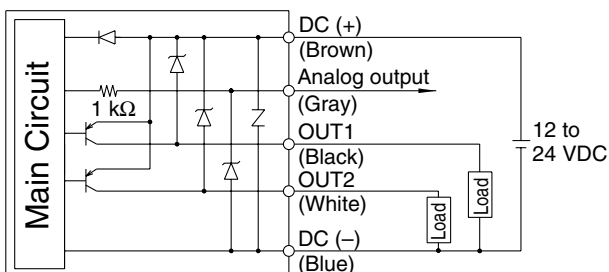

### ZSE40(F)/ISE40-□-70(L)-(M)


With auto shift input

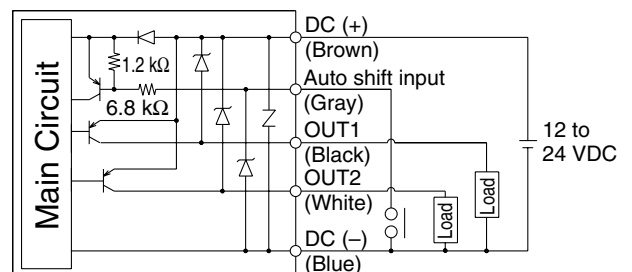



# Series ZSE40□/ISE40

## Dimensions



### ZSE40(F)/ISE40-<sup>01</sup><sub>T1</sub>

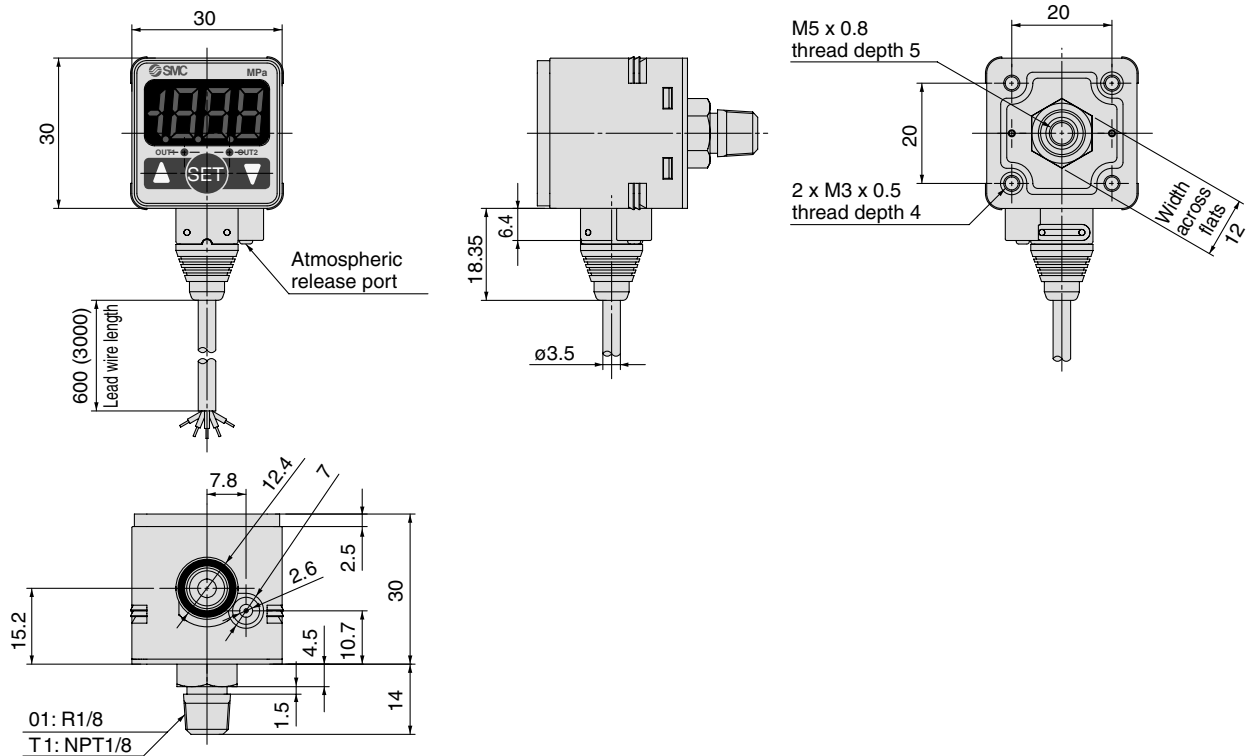

### Bracket A

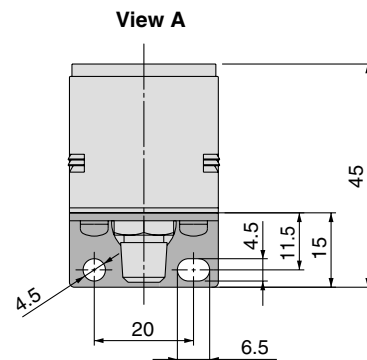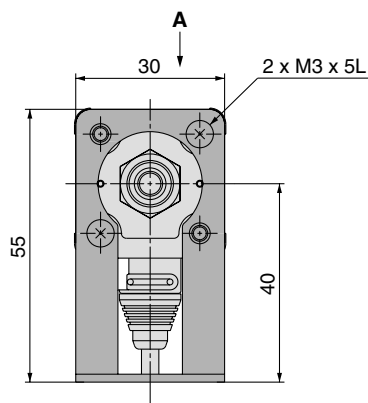


### Bracket D

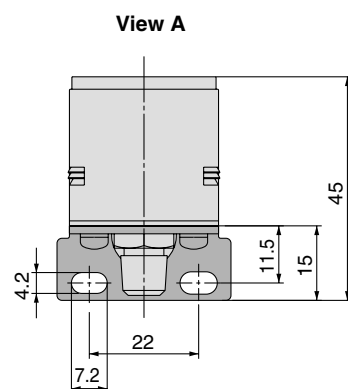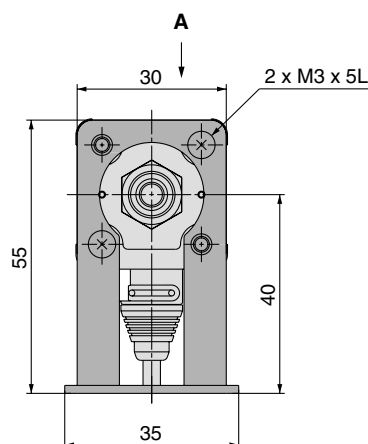


## Dimensions

### ZSE40(F)/ISE40-W1-WF1

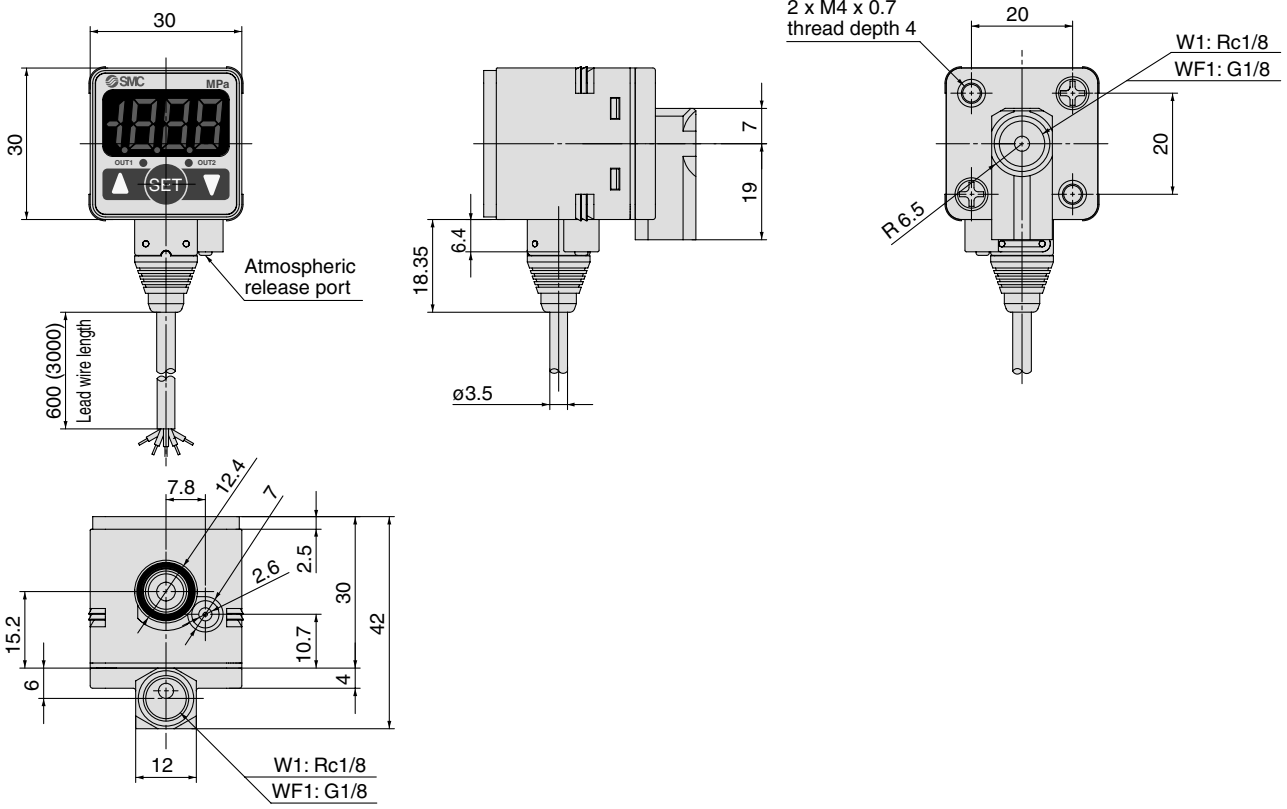


ZSE
ISE
ZSP
PS
ISA
PSE
IS
ISG
ZSM

### Bracket A

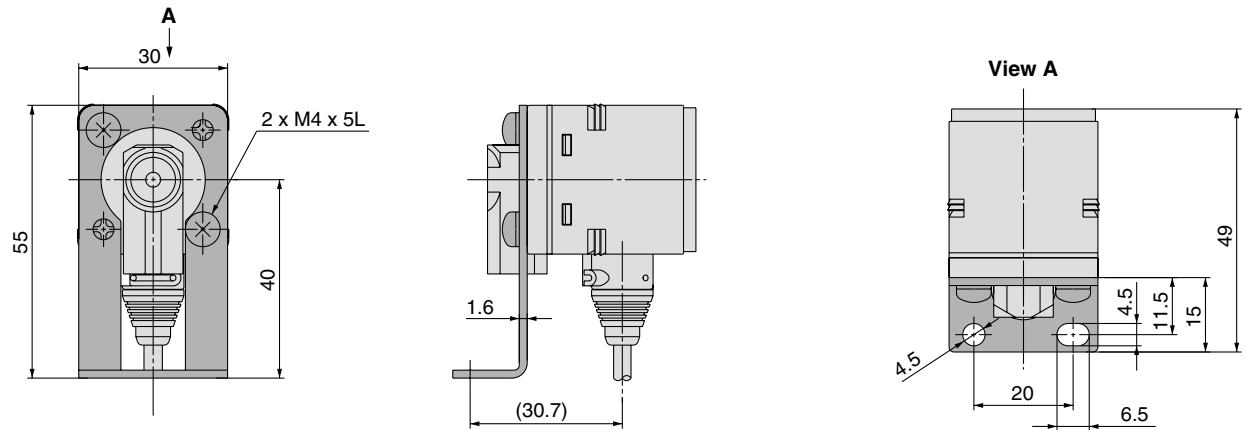


### Bracket B

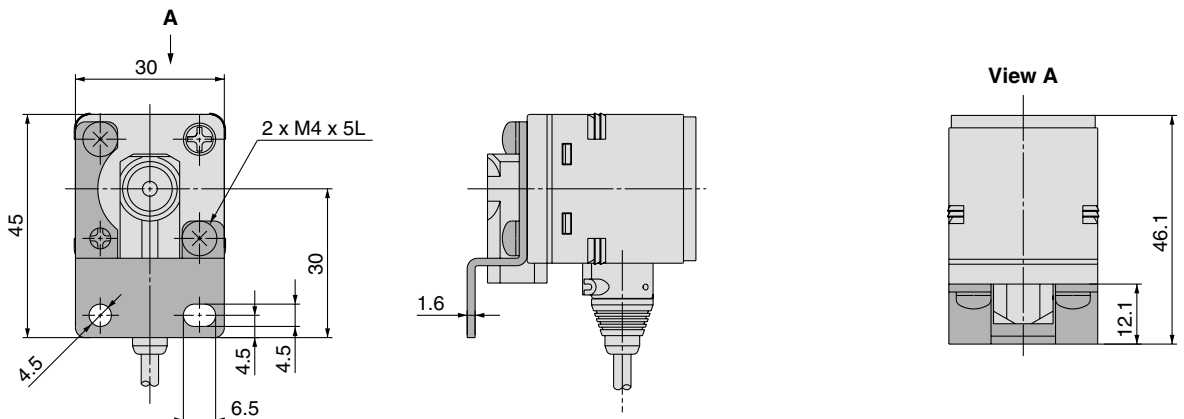


# Series ZSE40□/ISE40

## Dimensions

### Bracket D

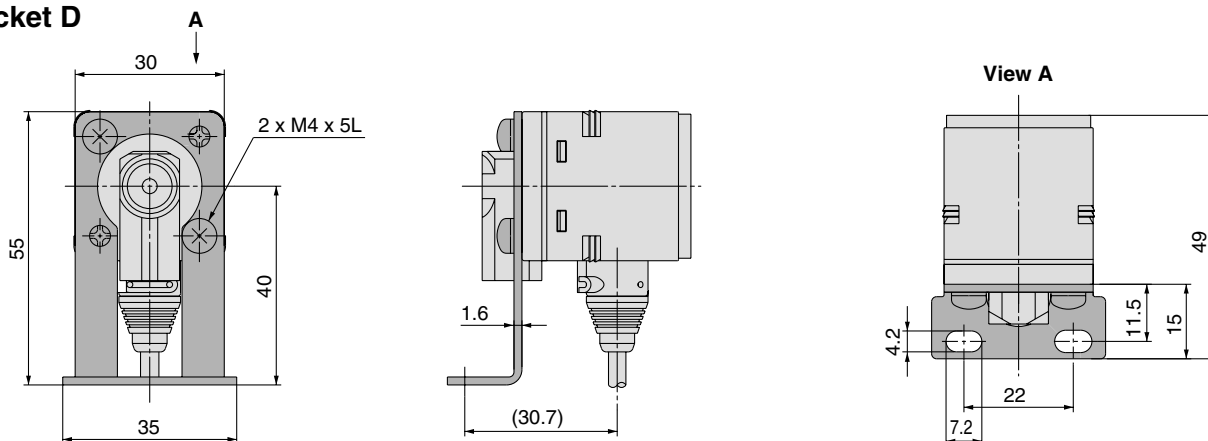


### ZSE40(F)/ISE40- C4 C6 M5

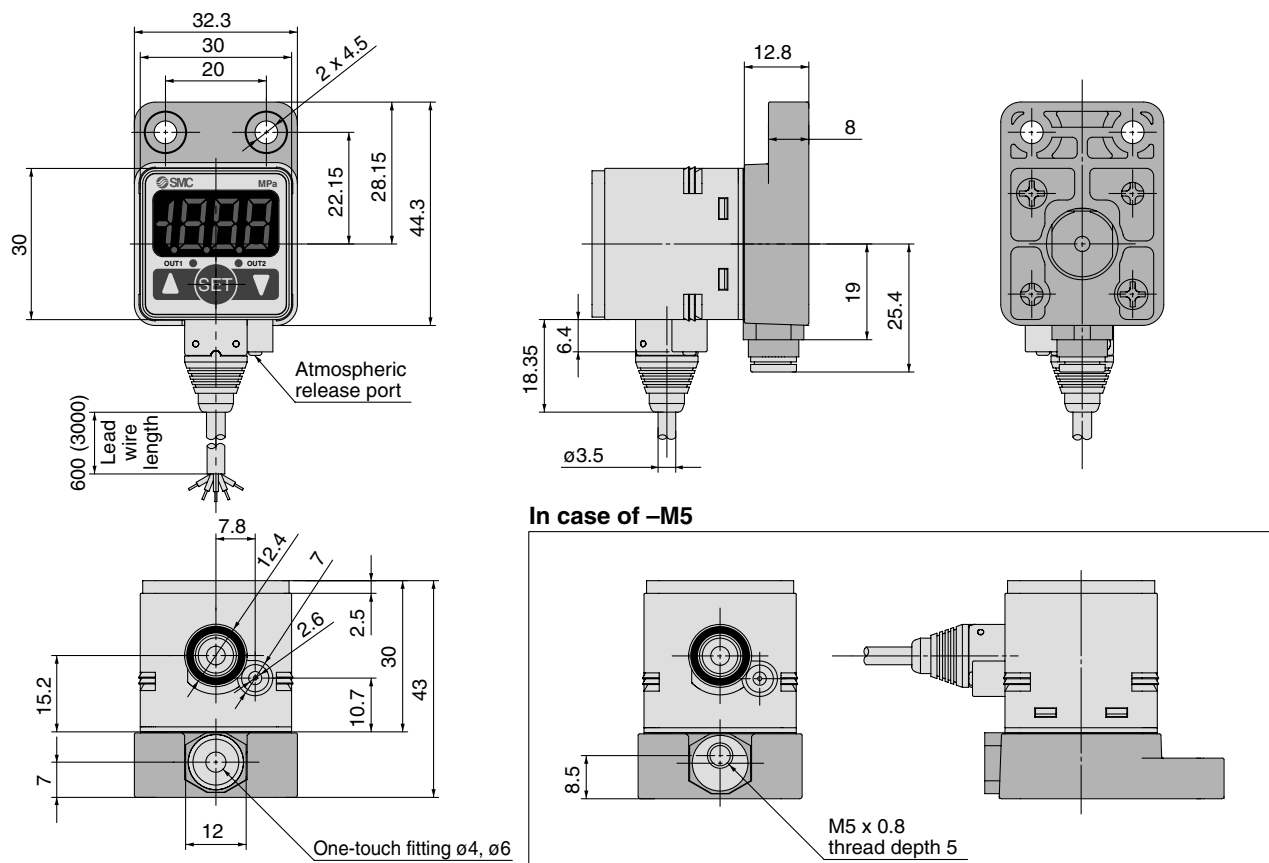




**Dimensions**


**Panel mounting**

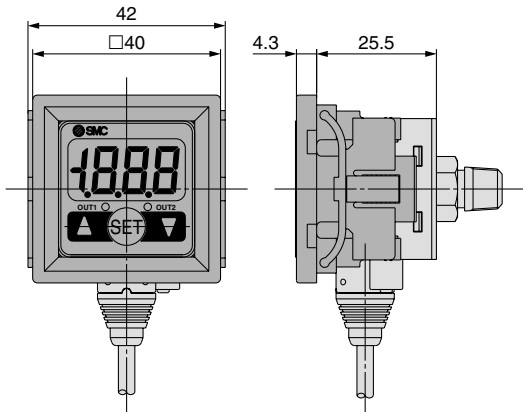

**Panel fitting dimension**

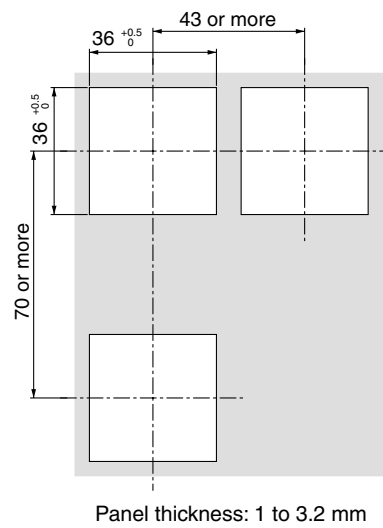

**Panel mount + Front protective cover**

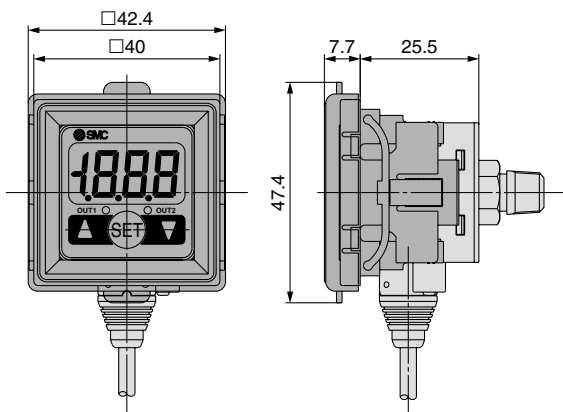


- ZSE
- ISE
- ZSP
- PS
- ISA
- PSE
- IS
- ISG
- ZSM

# Series ZSE40□/ISE40

## Methods of Connecting Pipe

When connecting a hexagon socket plug or fitting on the pressure port, fix the hexagon part of the pressure port, applying a 12 mm width wrench and fasten with the torque of 8.8 N·m or less.


-W1 type has a removable pressure port base and can change the orientation of inducing pressure.

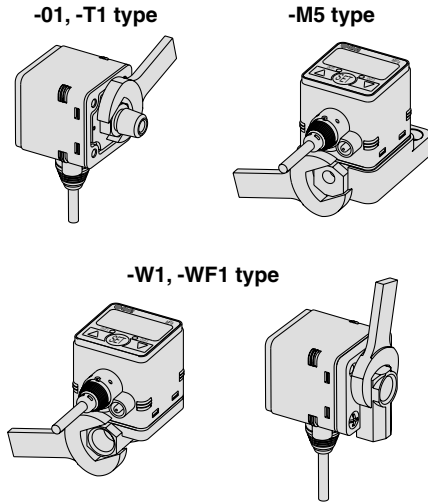

## Assembly of Mounting Bracket

When installing a mounting bracket on -01 or -W1 type, use stainless steel cross-recessed head machine screws: M3 x 5L (2 pcs.) The tightening torque should be 0.98 N·m or less.

When installing a mounting bracket on -C4, -C6, -M5, -W1 or -WF1 type, use stainless steel cross-recessed head machine screws: M4 x 5L (2 pcs.) The tightening torque should be 0.98 N·m or less.

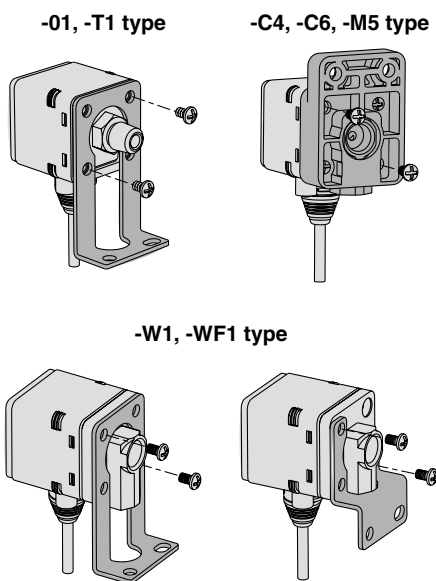

## Error Correction

Take the following corrective solutions when errors occur.

Error description	LCD display	Description	Solution
Over-current error	OUT1	Current exceeding 80 mA is being applied for the load, OUT.	Shut off the power supply. After eliminating the output factor that caused the overcurrent, turn the power supply back on.
	OUT2		
Residual pressure error	Er3	When zero clear is performed, the following pressure differences have occurred. (ISE40: $\pm 0.071$ MPa or more) (ZSE40(F): $\pm 7.1$ kPa or more) * After displaying for approx. 3 seconds, it automatically reinstates to the measurement mode.	Only after reinstating to the atmospheric pressure, operate zero clear one more time.
Applied pressure error	---	Pressure exceeding the upper limit of the regulating pressure range is applied.	Reduce/Increase supply pressure to be within the regulating pressure range.
	---	Pressure below the lower limit of the regulating pressure range is applied.	
Auto shift error	UUU	Pressure above the upper limit of the regulating pressure range is applied. * After displaying for approx. 1 second, it returns to the measurement mode.	Reset the value, so that the sum of the applied pressure and set pressure at the time of auto shift input will not exceed the regulating pressure range.
	LLL	Pressure below the lower limit of the regulating pressure range is applied. * After displaying for approx. 1 second, it returns to the measurement mode.	
System error	Er4	Internal data error.	Shut off the power supply and then turn it back on. If it can not be reinstated, contact SMC for further investigation.
	Er6	Internal system error.	
	Er7	Internal data error.	
	Er8	Internal system error.	

\* Upper limit side and lower limit side are described in the table below. Besides, the relation between the upper limit and lower limit is reversed for the vacuum pressure only.

	Regulating pressure range	Lower limit side	Upper limit side
Compound pressure	-100.0 to 100.0 kPa	-100.0 kPa	100.0 kPa
Vacuum pressure	10.0 to -101.3 kPa	10.0 kPa	-101.3 kPa
Positive pressure	-0.100 to 1.000 MPa	-0.100 MPa	1.000 MPa

	With auto shift function		
	Set pressure range	Lower limit side	Upper limit side
Compound pressure	-100.0 to 100.0 kPa	-100.0 kPa	100.0 kPa
Vacuum pressure	-101.3 to 101.3 kPa	101.3 kPa	-101.3 kPa
Positive pressure	-1.000 to 1.000 MPa	-1.000 MPa	1.000 MPa


## With Auto Shift Function

### Auto shift function

Assuming the measured pressure at the time of auto shift input to be the standard pressure value, it functions to compensate the set value of switch output 1 “P<sub>-1</sub>” or “n<sub>-1</sub>” and “P<sub>-2</sub>” or “n<sub>-2</sub>”, and the set value of switch output 2 “P<sub>-3</sub>” or “n<sub>-3</sub>” and “P<sub>-4</sub>” or “n<sub>-4</sub>”.


### When the auto shift is NOT used:

When the supply pressure fluctuates, correct operation is no longer possible.

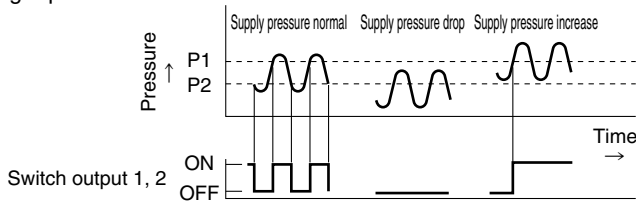

### When the auto shift is used:

At the point when the supply pressure fluctuates, and if the auto shift input is set at “L<sub>a</sub>”, the pressure at the time is saved and the set pressure is to be compensated by that value to enable correct function.

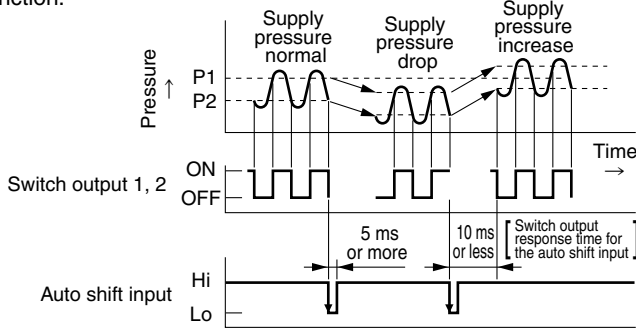

### Auto shift function

- Keep the pressure for 5 ms or more, after the trailing edge signal of auto shift input.
- When the auto shift is activated, display panel shows “0000” for approx. 1 second, and the pressure value at that point is memorized to be as a compensation value “E<sub>-5</sub>”.
- The memorized compensation value makes the set value “P<sub>-1</sub>” to “P<sub>-4</sub>” or “n<sub>-1</sub>” to “n<sub>-4</sub>” to be compensated.
- Time between the auto shift input and switch output activation is 10 ms or less.
- When the set value compensated by the auto shift input exceeds the possible set range, compensation value is not saved. When the value exceeds the upper limit, “UUUU” is displayed, whereas, “LLLL” is displayed when it is below the lower limit.
- The compensation value “E<sub>-5</sub>” immediately after the auto shift function disappears when the power supply is turned off.
- The compensation value “E<sub>-5</sub>” for the auto shift function is reset to zero (initial value) when the power source is applied once again.

\* EEPROM is not used to store the compensation value.

With auto shift function, allowable setting range is as follows:


Regulating pressure range	Set pressure range
-100.0 to 100.0 kPa	-100.0 to 100.0 kPa
10.0 to -101.3 kPa	101.3 to -101.3 kPa
-0.1 to -1.000 MPa	-1.000 to 1.000 MPa

ZSE  
ISE  
ZSP  
PS  
ISA  
PSE  
IS  
ISG  
ZSM


## Analog Output

Applicable model number: ZSE40(F)/ISE40-□-22/62(L)-(M)

### Series ISE40/ZSE40

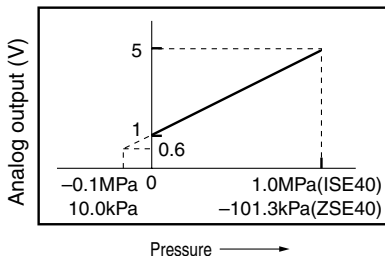

### Series ZSE40F

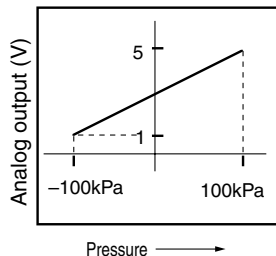



Please consult SMC for detailed dimensions, specifications and delivery.

## 1 Extended auto shift specifications

When the auto shift is activated and the compensated set value exceeds the regulating pressure range, the set value is automatically adjusted within the regulating pressure range.

Either 1 output (OUT 2 only) or 2 outputs (OUT 1 and 2) are available for the auto shift activation.

### How to Order

\* Please refer to "How to Order" on page 706 for the standard specifications.

ISE40/ZSE40(F) - □ - □ (L) - M - X119

Piping specifications \*

Input/Output specifications \*

External dimensions are the same as those of standard products.

## 2 Space saving specifications

Product has larger allowable space for installing a panel mount, etc, by making a small the mold of an electrical entry beneath the housing.

### How to Order


\* Please refer to "How to Order" on page 706 for the standard specifications.

ISE40/ZSE40(F) - □ - □ (L) - M - X129

Piping specifications \*

Input/Output specifications \*

\* This product is rated for IP40 enclosure. (Standard product is IP65.)

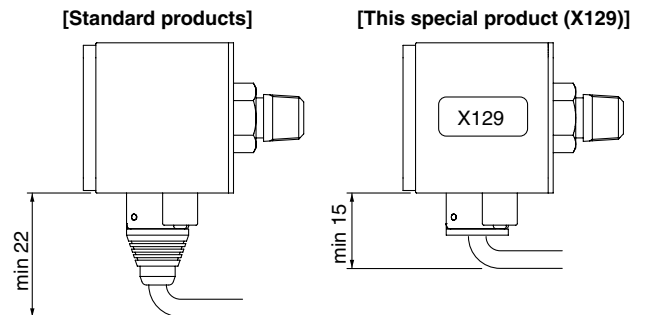



# Series ZSE40□/ISE40 Specific Product Precautions

Be sure to read before handling. Refer to front matters 58 and 59 for Safety Instructions and pages 687 to 691 for Pressure Switch Precautions.

## Wiring

### ⚠ Caution

1. When using a switching regulator on the market, make sure to ground the FG terminal.


## Operating Environment

### ⚠ Warning

1. Although this pressure switch is CE conformed product, it does not resist surges resulting from electrical storms. Please take proper precautions to prevent damage to equipment.

### ⚠ Caution

1. Please do not use in an environment where oil or solvent is splashed.
2. In places where the switch main body is splashed by water or dust, etc, may enter the switch through the atmospheric release port. Please insert  $\phi 4$  tube (I.D.  $\phi 2.5$ ) into the atmospheric release port and connect the opposite end to a cleaner environment where water, etc is not splashed. Please do not bend the tube or block the hole, this could lead to incorrect pressure measurement.

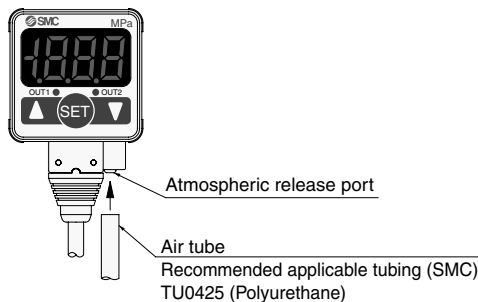

## Other

### ⚠ Caution

1. Immediately after the electric power is supplied, some drifting, as much as  $\pm 0.5\%$  F.S., takes place. When used for micro pressure, allow it to warm up for about 20 to 30 minutes.

ZSE  
ISE

ZSP

PS

ISA

PSE

IS

ISG

ZSM

## Regulating pressure range and rated pressure range

### ⚠ Caution

**Set the pressure within the rated pressure range.**

The regulating pressure range is the range of pressure that is possible in setting.

The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) on the sensor.

Although it is possible to set a value outside the rated pressure range, the specifications will not be guaranteed even if the value stays within the regulating pressure range.

Switch	Pressure range				
	-100 kPa	0	100 kPa	500 kPa	1 MPa
For vacuum pressure <b>ZSE40</b>	-101.3 kPa	0 kPa			
	-101.3 kPa	10 kPa			
For compound pressure <b>ZSE40F</b>	-100 kPa		100 kPa		
	-100 kPa		100 kPa		
For positive pressure <b>ISE40</b>		0			1 MPa
	-100 kPa (-0.1 MPa)				1 MPa

Rated pressure range of switch  
 Regulating pressure range of switch

# 2-Color Display High Precision Digital Pressure Switch



**IP65 compliant**

**RoHS compliant**


**Applicable fluid**

**Air, Non-corrosive gas, Non-flammable gas**

**Can copy to up to 10 switches simultaneously.**

The settings of the master pressure switch (source of copy) can be copied to the slave pressure switches.

- Reduction in setting work
- Prevention of mistakes in setting

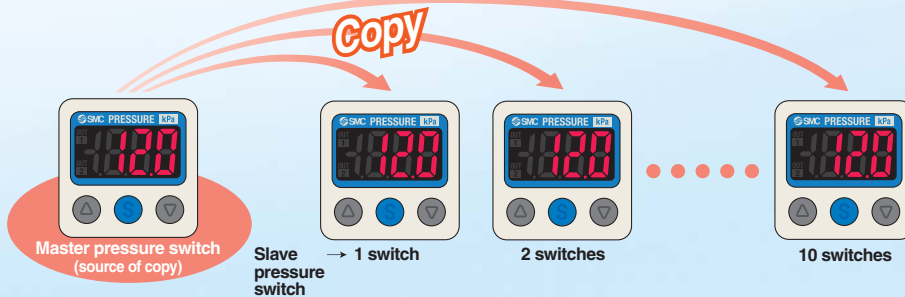


**Easy handling!**



Raised rubber switch buttons for easy and comfortable operation

**3-step setting**

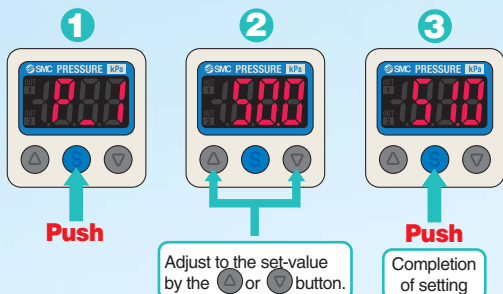


**2-color display**


**See abnormal values at a glance.**



## Piping Variations

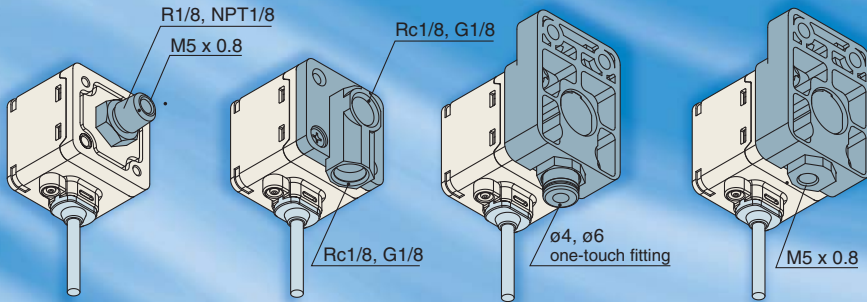


## Space-saving

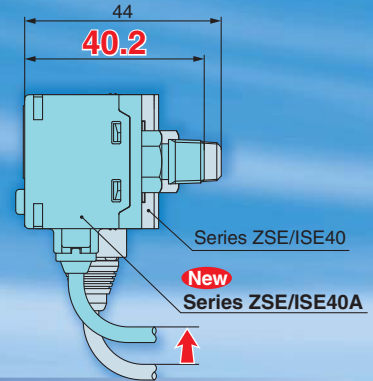


## Mounting Variations


Bracket A

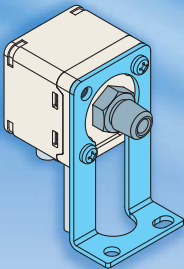

Bracket B




Bracket D

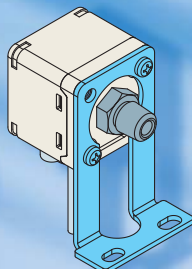


Interchangeable with the ZSE40/ISE40 series for mounting

Direct mounting  
(Wall mounting)

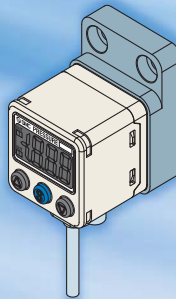

Panel mounting

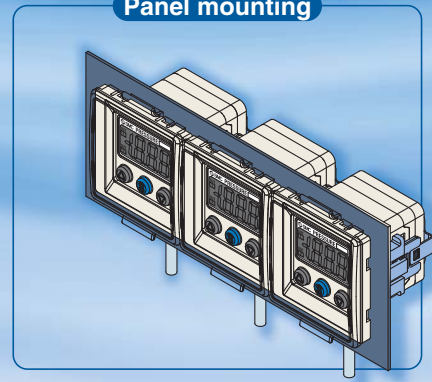

## Series

Series	ZSE40A (vacuum pressure)	ZSE40AF (compound pressure)	ISE40A (positive pressure)
Rated pressure range	0.00 to -14.69 psi -14.69 psi	-14.50 to 14.50 psi 14.5 psi -14.5 psi	-14.5 to 145.0 psi 145 psi -14.5 psi
Set pressure range	1.45 to -15.23 psi	-15.22 to 15.22 psi	-15.2 to 152.3 psi
Withstand pressure	72.5 psi	72.5 psi	218 psi
Min. unit setting	0.01 psi	0.02 psi	0.1 psi
Output	<ul style="list-style-type: none"> <li>NPN or PNP open collector 2 outputs + Copy function</li> <li>NPN or PNP open collector 2 outputs + Analog output (voltage or current)/Auto-shift input</li> </ul>		
Piping	R1/8, NPT1/8 (With M5 female thread), Rc1/8, G1/8, M5 female thread ø4, ø6 one-touch fitting		

### Secret code setting function

A function to prevent operation by anyone other than the designated operator while the keys are locked.



An optional 3-digit value is entered.

\* The set-value can be checked while the keys are locked.

### Power-saving function

The display can be turned off to save the power consumption. (Power consumption reduced by max. 20%)



The value disappears and decimal points start flashing.

### Resolution conversion function

The flickering on the display can be eliminated.



1/1000



1/100

(Only the displayed value is changed, and there is no effect on the accuracy.)

### MPa/kPa switching function

The indication unit for vacuum, compound pressure and positive pressure can be integrated into either MPa or kPa.




kPa Stick the label (enclosed with the product) of a desired unit seal.

# 2-Color Display High Precision Digital Pressure Switch

# Series ZSE40A(F)/ISE40A



## How to Order

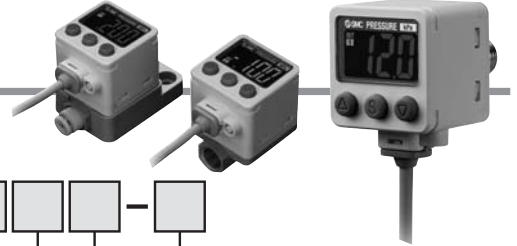

**Rated pressure range**  
**ISE40A** -14.5 to 145.0 psi

For positive pressure

**ISE40A** - **01** - **X** - **P** [ ] [ ] - [ ]

For vacuum/  
compound pressure

**ZSE40A** - **01** - **Y** - **P** [ ] [ ] - [ ]

**Rated pressure range**  
**ZSE40A** 0.00 to -14.69 psi  
**ZSE40AF** -14.50 to 14.50 psi

**Piping specifications**

Option	Specification	Diagram
<b>01</b>	R1/8 (With M5 female thread)	
<b>N01</b>	NPT1/8 (With M5 female thread)	
<b>W1</b>	Rc1/8	
<b>WF1*</b>	G1/8	
<b>M5*</b>	M5 x 0.8 (Female thread)	
<b>C4*</b>	ø4 one-touch fitting	
<b>C6*</b>	ø6 one-touch fitting	

\* Made to Order

Combination of piping specifications with option 1 and part numbers of options

Option 1	Piping									
	Description	Symbol	Part no.	01	N01	W1	WF1	M5	C4	C6
Bracket A	<b>A</b>	<b>ZS-24-A</b>	○	○	○	○	○	×	×	×
Bracket B	<b>B</b>	<b>ZS-24-B</b>	×	×	○	○	○	×	×	×
Bracket D	<b>D</b>	<b>ZS-24-D</b>	○	○	○	○	×	×	×	×
Panel mount adapter	<b>E</b>	<b>ZS-35-C</b>	○	○	×	×	×	×	×	×
	<b>F</b>	<b>ZS-35-D</b>	×	×	○	○	○	○	○	○
Panel mount adapter + Front protective cover	<b>F</b>	<b>ZS-35-F</b>	○	○	×	×	×	×	×	×
	<b>F</b>	<b>ZS-35-G</b>	×	×	○	○	○	○	○	○

### Output specifications

<b>R</b>	NPN open collector 2 outputs + Analog voltage/Auto-shift switching
<b>T</b>	PNP open collector 2 outputs + Analog voltage/Auto-shift switching
<b>S</b>	NPN open collector 2 outputs + Analog current/Auto-shift switching
<b>V</b>	PNP open collector 2 outputs + Analog current/Auto-shift switching
<b>X</b>	NPN open collector 2 outputs + Copy function
<b>Y</b>	PNP open collector 2 outputs + Copy function

When optional parts are required separately, Options/Part No. use the following part numbers to place an order.

Part no.	Option
<b>ZS-24-A</b>	Bracket A With 2 mounting screws of each M3 x 5L, M4 x 5L
<b>ZS-24-B</b>	Bracket B With 2 mounting screws M4 x 5L
<b>ZS-24-D</b>	Bracket D With 2 mounting screws of each M3 x 5L, M4 x 5L
<b>ZS-35-C</b>	Panel mount adapter (Piping: For 01/N01)
<b>ZS-35-D</b>	Panel mount adapter (Piping: For W1/WF1/M5/C4/C6)
<b>ZS-35-F</b>	Panel mount adapter + Front protective cover (Piping: For 01/N01)
<b>ZS-35-G</b>	Panel mount adapter + Front protective cover (Piping: For W1/WF1/M5/C4/C6)

### Unit specifications

<b>Nil</b>	With unit switching function (Note 1)
<b>M</b>	Fixed SI unit (Note 2)
<b>P</b>	With unit switching function (Note 1) (Initial value psi)

Note 1) Under the New Measurement Law, sales of switches with the unit switching function are not allowed for use in Japan.

Note 2) Fixed unit:  
 For vacuum/compound pressure: kPa  
 For positive pressure: MPa

• Made to Order

• Option 2

Symbol	Calibration certificate
<b>Nil</b>	—
<b>K</b>	○

Symbol	Specifications/Description
<b>X501</b>	Lead wire length 3 m
<b>X531</b>	M12 4-pin pre-wired connector (Lead wire length 100 mm)

• Option 1\*

Refer to page 17 for details.

<b>Nil</b>	None	
<b>A</b>	Bracket A	
<b>B</b>	Bracket B	
<b>D</b>	Bracket D	
<b>E</b>	Panel mount adapter <b>01/N01</b>	
<b>E</b>	Panel mount adapter <b>W1/WF1/M5/C4/C6</b>	
<b>F</b>	Panel mount adapter + Front protective cover <b>01/N01</b>	
<b>F</b>	Panel mount adapter + Front protective cover <b>W1/WF1/M5/C4/C6</b>	

\* Some options are unavailable depending on the piping specifications. Refer to "Combination of piping specifications with option 1 and part numbers of options".



# Series ZSE40A(F)/ISE40A

## Specifications

Model		ZSE40A (vacuum pressure)	ZSE40AF (compound pressure)	ISE40A (positive pressure)	
Rated pressure range		0.00 to -14.69 psi	-14.50 to 14.50 psi	-14.5 to 145.0 psi	
Display/Set pressure range		1.45 to -15.23 psi	-15.22 to 15.22 psi	-15.2 to 152.3 psi	
Withstand pressure		72.5 psi	72.5 psi	218 psi	
Display/Minimum unit setting		0.01 psi	0.02 psi	0.1 psi	
Applicable fluid		Air, Non-corrosive gas, Non-flammable gas			
Power supply voltage		12 to 24 VDC $\pm 10\%$ , Ripple (p-p) 10% or less (with power supply polarity protection)			
Current consumption		45 mA or less			
Switch output		NPN or PNP open collector 2 outputs (Selectable)			
Maximum load current		80 mA			
Maximum applied voltage		28 V (at NPN output)			
Residual voltage		1 V or less			
Response time		2.5 ms (with anti-chattering function: 20, 100, 500, 1000, 2000 ms)			
Short circuit protection		Yes			
Repeat accuracy		$\pm 0.2\%$ F.S. $\pm 1$ digit			
Hysteresis	Hysteresis mode	Variable (0 or above) <sup>Note 1)</sup>			
	Window comparator mode				
Analog output	<sup>Note 2)</sup> Voltage output	Output voltage (Rated pressure range)	1 to 5 V $\pm 2.5\%$ F.S.	0.6 to 5 V $\pm 2.5\%$ F.S.	
		Linearity	$\pm 1\%$ F.S. or less		
		Output impedance	Approx. 1 k $\Omega$		
	<sup>Note 3)</sup> Current output	Output current (Rated pressure range)	4 to 20 mA $\pm 2.5\%$ F.S.	2.4 to 20 mA $\pm 2.5\%$ F.S.	
		Linearity	$\pm 1\%$ F.S. or less		
		Load impedance	Maximum load impedance: 300 $\Omega$ (Power supply voltage 12 V) 600 $\Omega$ (Power supply voltage 24 V) Minimum load impedance: 50 $\Omega$		
Auto-shift input		Non-voltage input (Reed or Solid state), Low level: 0.4 V or less, 5 ms or longer input			
Display		3 1/2-digit, 7-segment, 2-color LCD (Red/Green)			
Display accuracy		$\pm 2\%$ F.S. $\pm 1$ digit (Ambient temperature of 77 $\pm 5^\circ$ F)			
Indicator light		Lights up when output is turned ON. OUT1, OUT2: Orange			
Environment resistance	Enclosure	IP65			
	Operating temperature range	Operating: 23 to 122 $^\circ$ F, Stored: 14 to 140 $^\circ$ F (No freezing or condensation)			
	Operating humidity range	Operating/Stored: 35 to 85% RH (No condensation)			
	Withstand voltage	1000 VAC for 1 minute between live parts and case			
	Insulation resistance	50 M $\Omega$ or more between live parts and case (at 500 VDC Mega)			
	Vibration resistance	10 to 150 Hz at whichever is smaller of 1.5 mm amplitude or 20 m/s <sup>2</sup> acceleration, in X, Y, Z directions, for 2 hours each (De-energized)			
Impact resistance	100 m/s <sup>2</sup> in X, Y, Z directions, 3 times each (De-energized)				
Temperature characteristics		$\pm 2\%$ F.S. (Based on 77 $^\circ$ F)			
Lead wire		Oilproof heavy-duty vinyl cable $\phi 3.5$ , 2 m Conductor area: 0.15 mm <sup>2</sup> (AWG26) Insulator O.D.: 0.95 mm			
Standards		CE marking, UL (CSA), RoHS compliance			

Note 1) If the applied voltage fluctuates around the set-value, the hysteresis must be set to a value more than the fluctuating width, otherwise chattering will occur.

Note 2) When the analog voltage output is selected, the analog current output cannot be selected.


Note 3) When the analog current output is selected, the analog voltage output cannot be selected.

## Piping Specifications


Part no.		01	N01	W1	WF1	M5	C4	C6
Port size		R1/8 (With M5 female thread)	NPT1/8 (With M5 female thread)	Rc1/8	G1/8	M5 x 0.8 female thread	$\phi 4$ one-touch fitting	$\phi 6$ one-touch fitting
Material of parts in contact with fluid	Sensor pressure receiving area	Silicon						
	Piping port	C3602 (Electroless nickel plated) O-ring: HNBR			ZDC2 O-ring: HNBR		ZDC2, POM, Stainless steel 304, C3604 (Electroless nickel plated) O-ring: HNBR	
Weight		78 g	79 g	97 g		104 g	101 g	

## Analog Output

### Voltage output

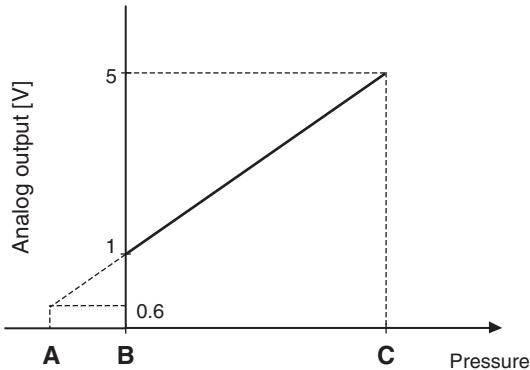

### Current output

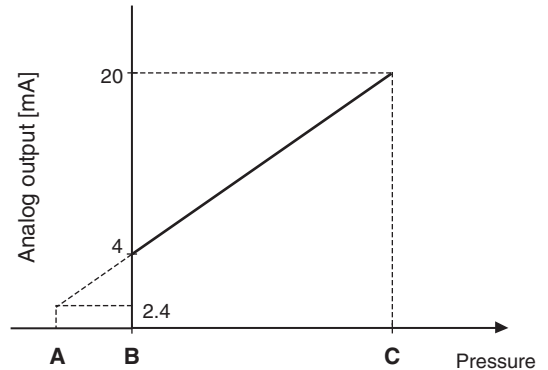

Range	Rated pressure range	A	B	C
For vacuum pressure	0.00 to -14.69 psi	1.47 psi	0	-14.69 psi
For compound pressure	-14.50 to 14.50 psi	—	-14.50 psi	14.50 psi
For positive pressure	-14.5 to 145.0 psi	-14.5 psi	0	145.0 psi

## Descriptions

**Output (OUT1) display (Orange)**  
Lights up when OUT1 is turned ON.

**Output (OUT2) display (Orange)**  
Lights up when OUT2 is turned ON.

**△ button**  
Use this button to select the mode or increase the ON/OFF set-value. It is also used for switching to the peak display mode.

**LCD**  
Displays the current pressure, set mode, selected display unit, and error code. Always use red or green display; or switch between green and red according to the output. Four different display settings are available.


**SET button**  
Use this button to change the mode or confirm the set-value.

**▽ button**  
Use this button to select the mode or decrease the ON/OFF set-value. It is also used for switching to the bottom display mode.

# Series ZSE40A(F)/ISE40A


## Internal Circuits and Wiring Examples

### -R NPN (2 outputs) + Analog voltage output

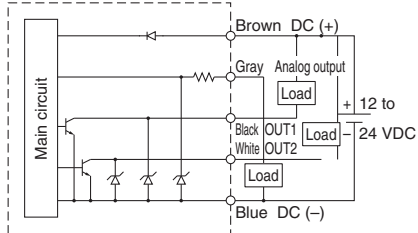


Max. 28 V, 80 mA  
Residual voltage 1 V or less

### -S NPN (2 outputs) + Analog current output

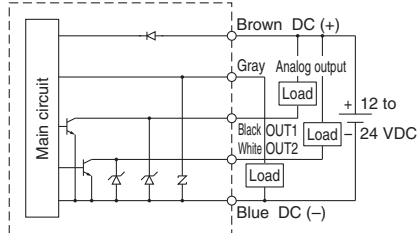


Max. 28 V, 80 mA  
Residual voltage 1 V or less

### -R/-S NPN (2 outputs) + Auto-shift input

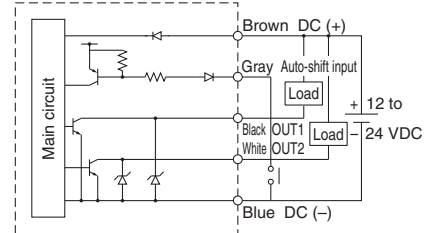


Max. 28 V, 80 mA  
Residual voltage 1 V or less

### -T PNP (2 outputs) + Analog voltage output

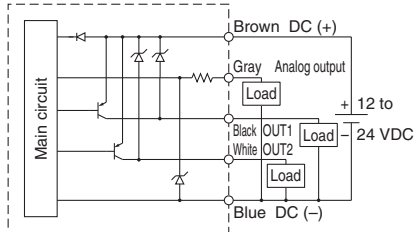


Max. 80 mA  
Residual voltage 1 V or less

### -V PNP (2 outputs) + Analog current output

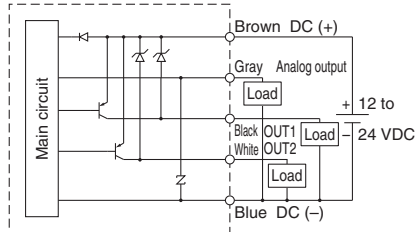


Max. 80 mA  
Residual voltage 1 V or less

### -T/-V PNP (2 outputs) + Auto-shift input

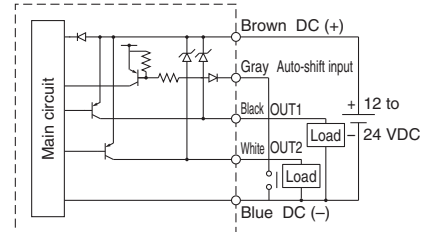


Max. 80 mA  
Residual voltage 1 V or less

### -X NPN (2 outputs) + Copy function

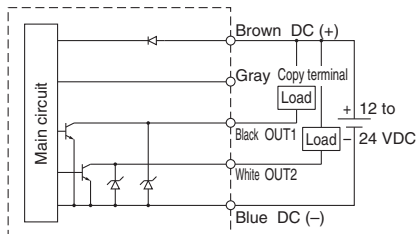

Max. 28 V, 80 mA  
Residual voltage 1 V or less

### -Y PNP (2 outputs) + Copy function

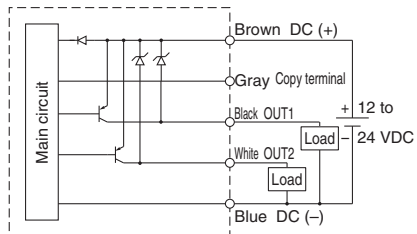


Max. 80 mA  
Residual voltage 1 V or less

2-Color Display High Precision Digital Pressure Switch **Series ZSE40A(F)/ISE40A**

**Dimensions**


**ZSE40A(F)/ISE40A-01**

**-N01**

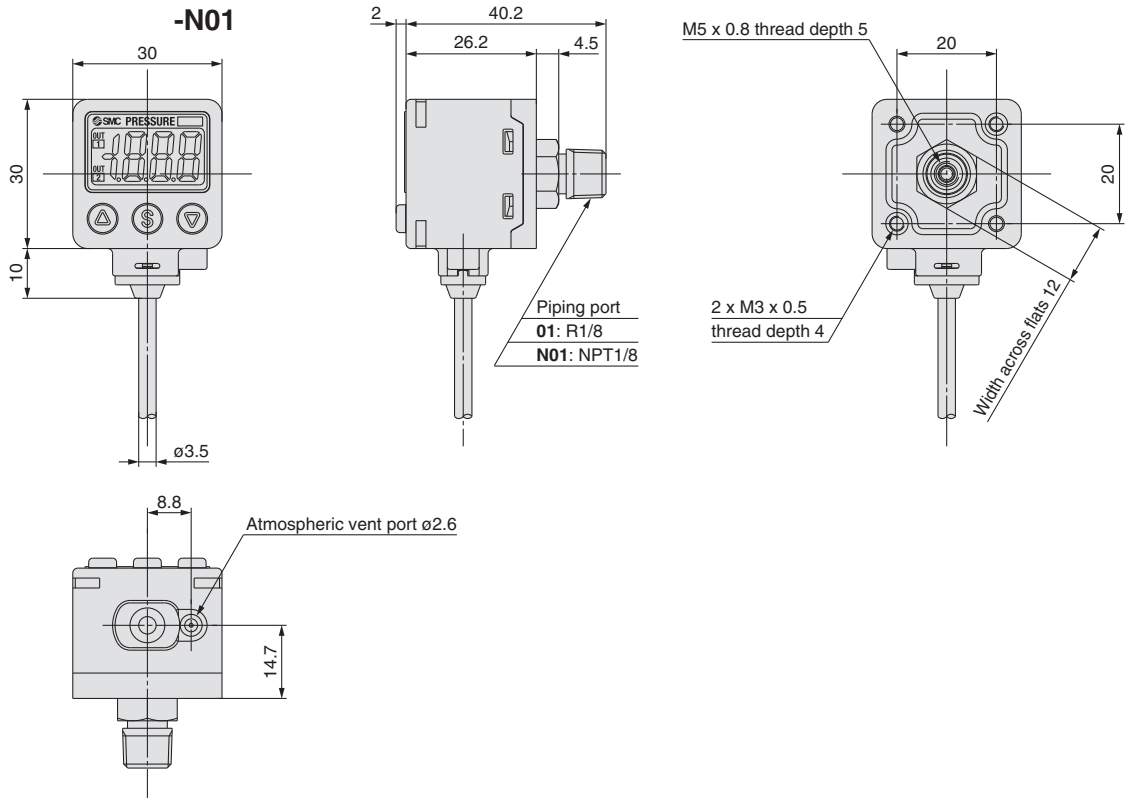

**ZSE40A(F)/ISE40A-W1**






**-WF1**

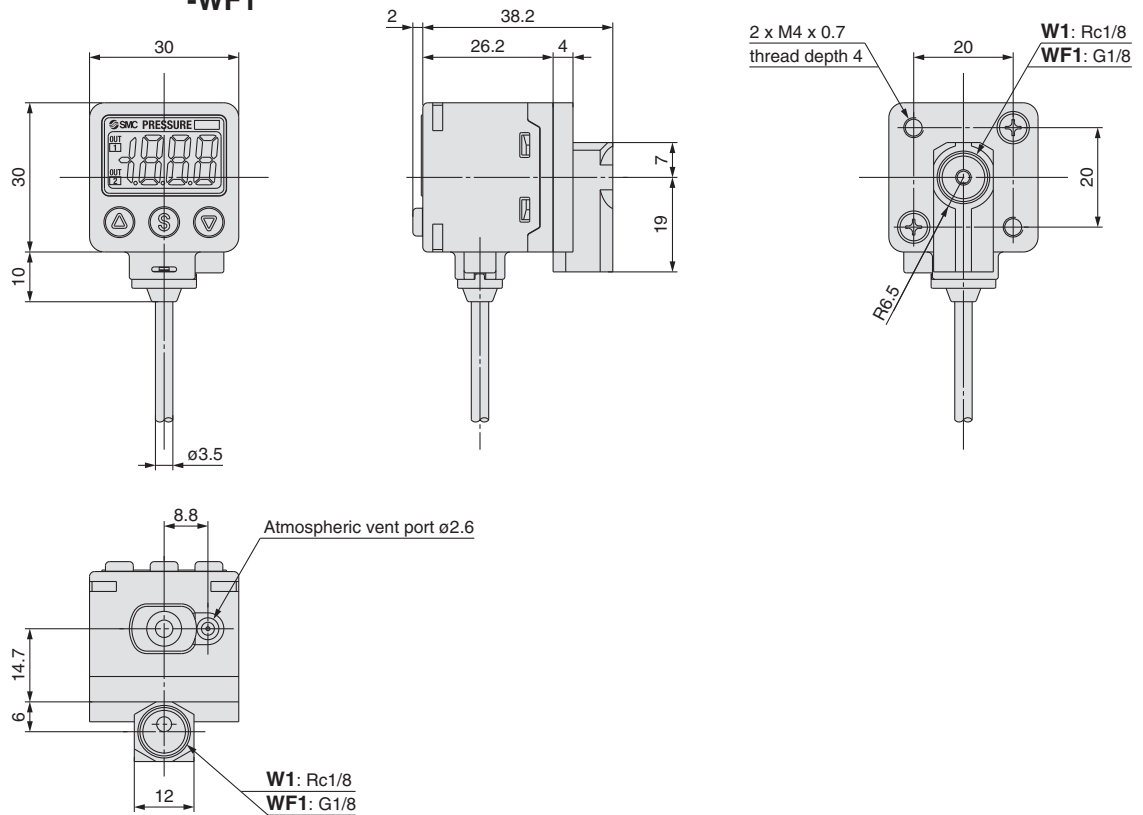

# Series ZSE40A(F)/ISE40A

## Dimensions

### ZSE40A(F)/ISE40A-C4 -C6

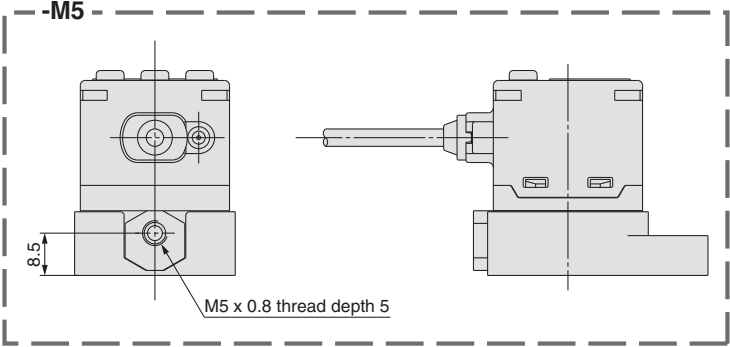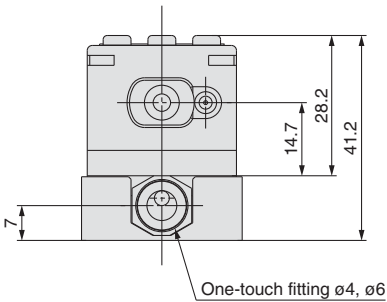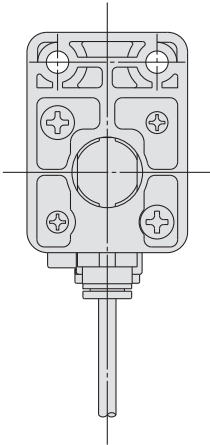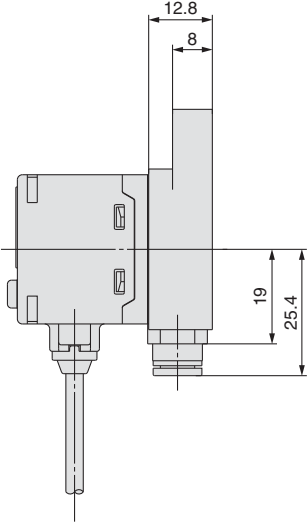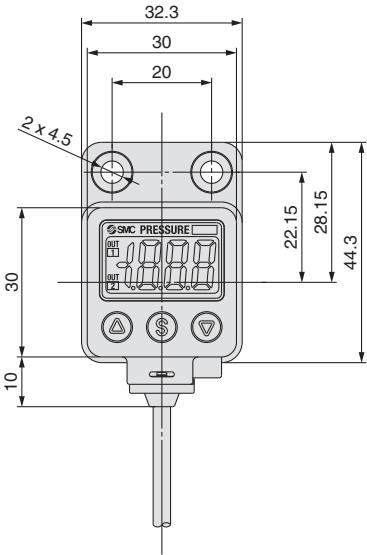


**Dimensions**

ZSE40A(F)/ISE40A-01-□-□A□

-N01-□-□A□


With bracket

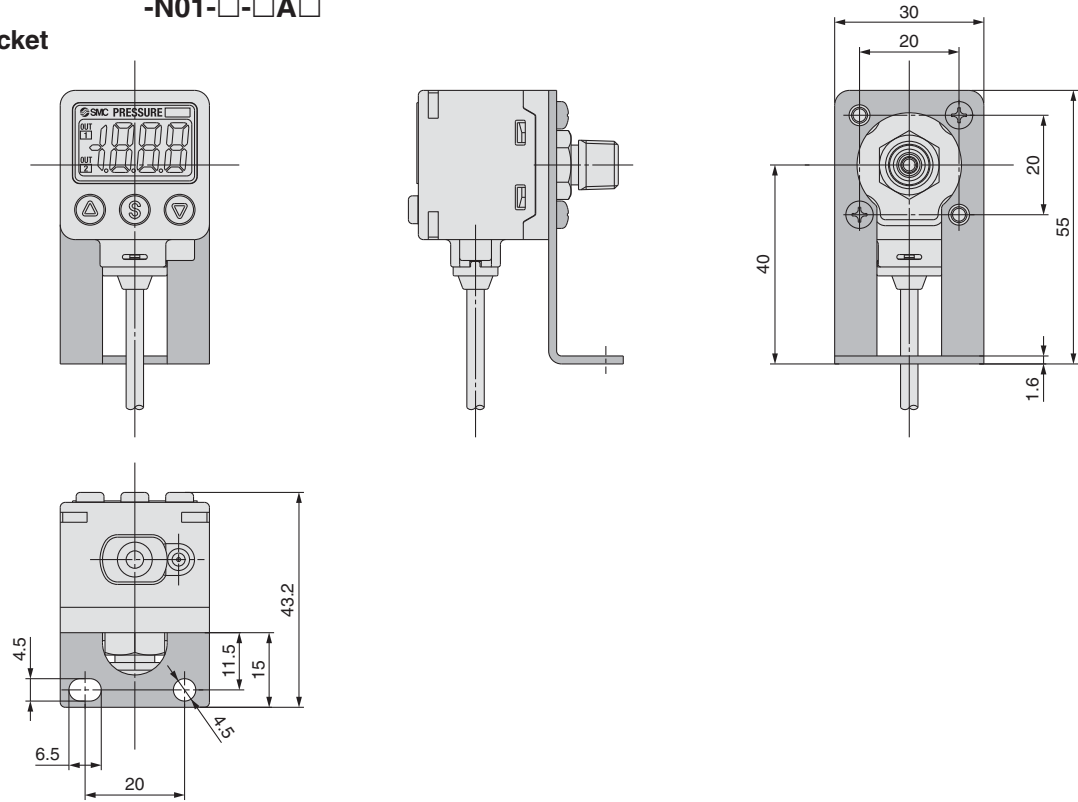

ZSE40A(F)/ISE40A-01-□-□D□

-N01-□-□D□

With bracket

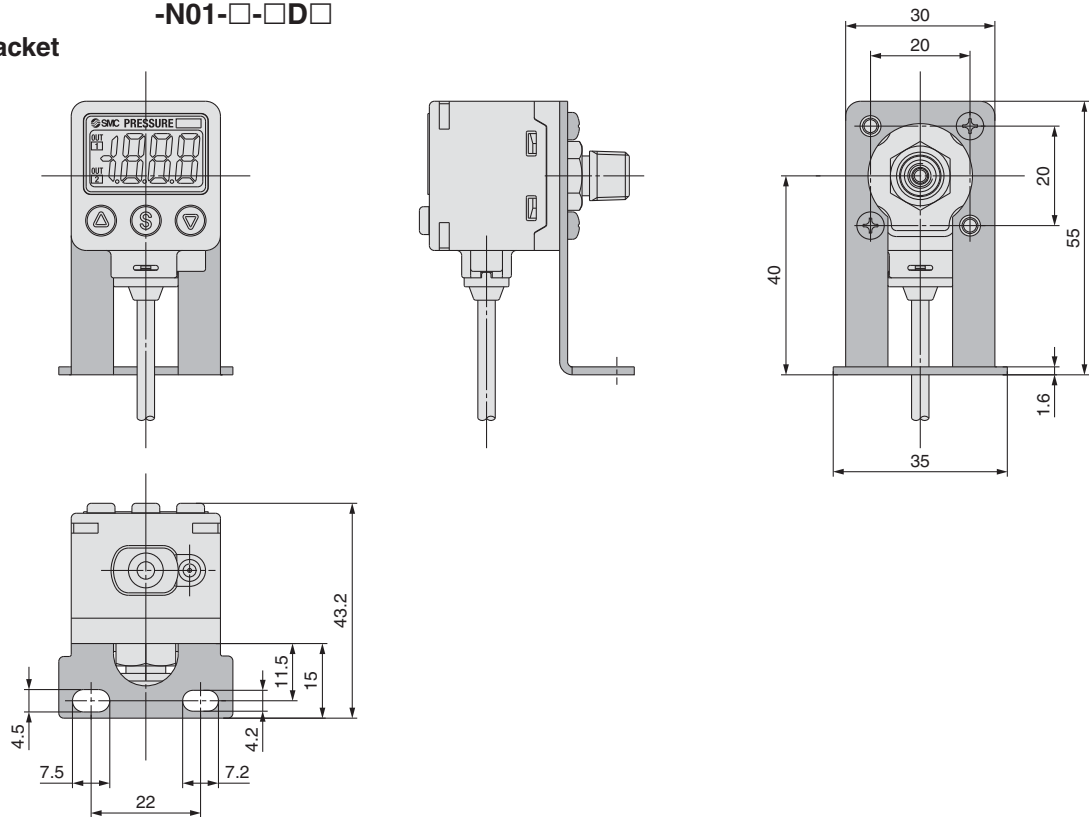


# Series ZSE40A(F)/ISE40A

## Dimensions


ZSE40A(F)/ISE40A-W1-□-□A□  
-WF1-□-□A□

With bracket

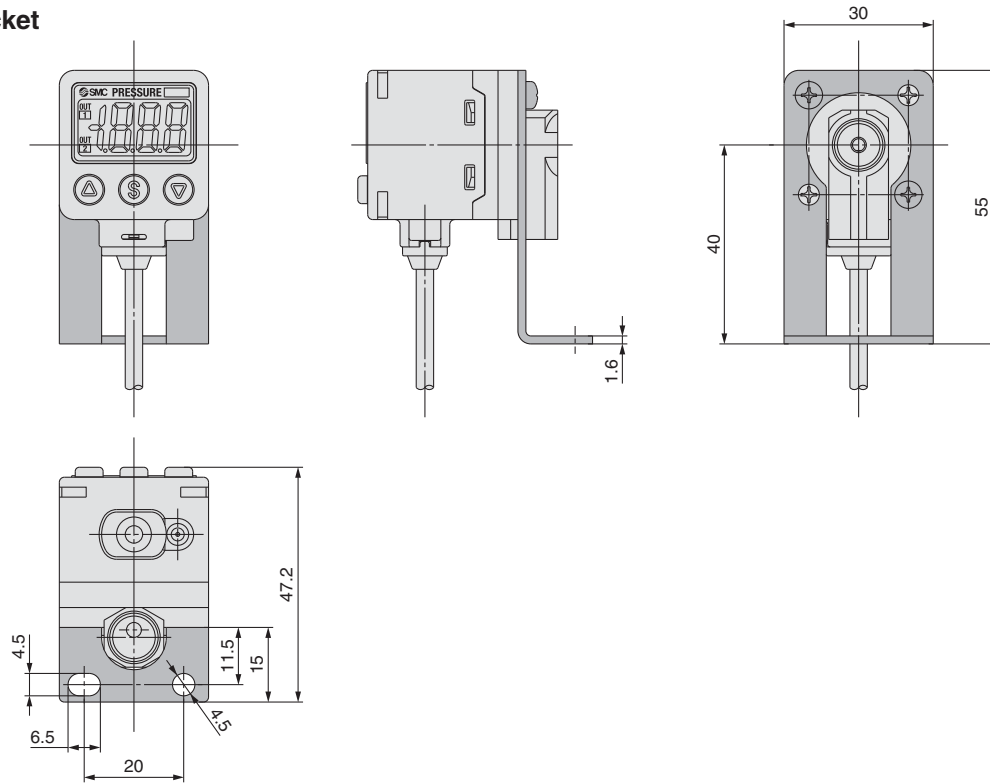

ZSE40A(F)/ISE40A-W1-□-□B□  
-WF1-□-□B□


With bracket

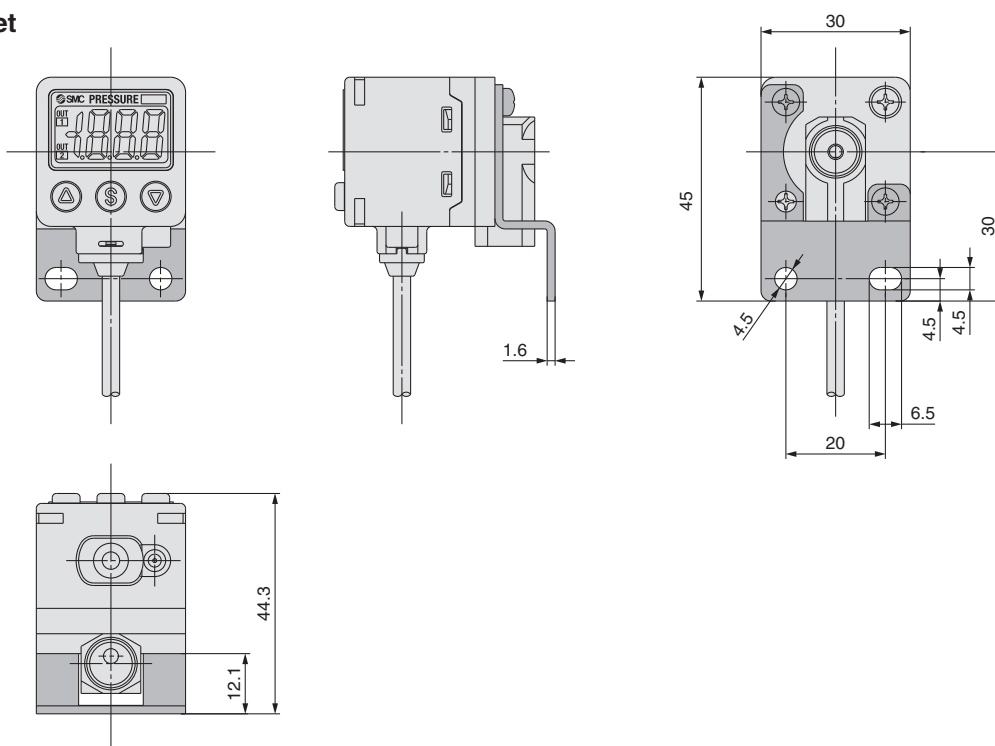

**Dimensions**

ZSE40A(F)/ISE40A-W1-□-□D□  
-WF1-□-□D□

With bracket

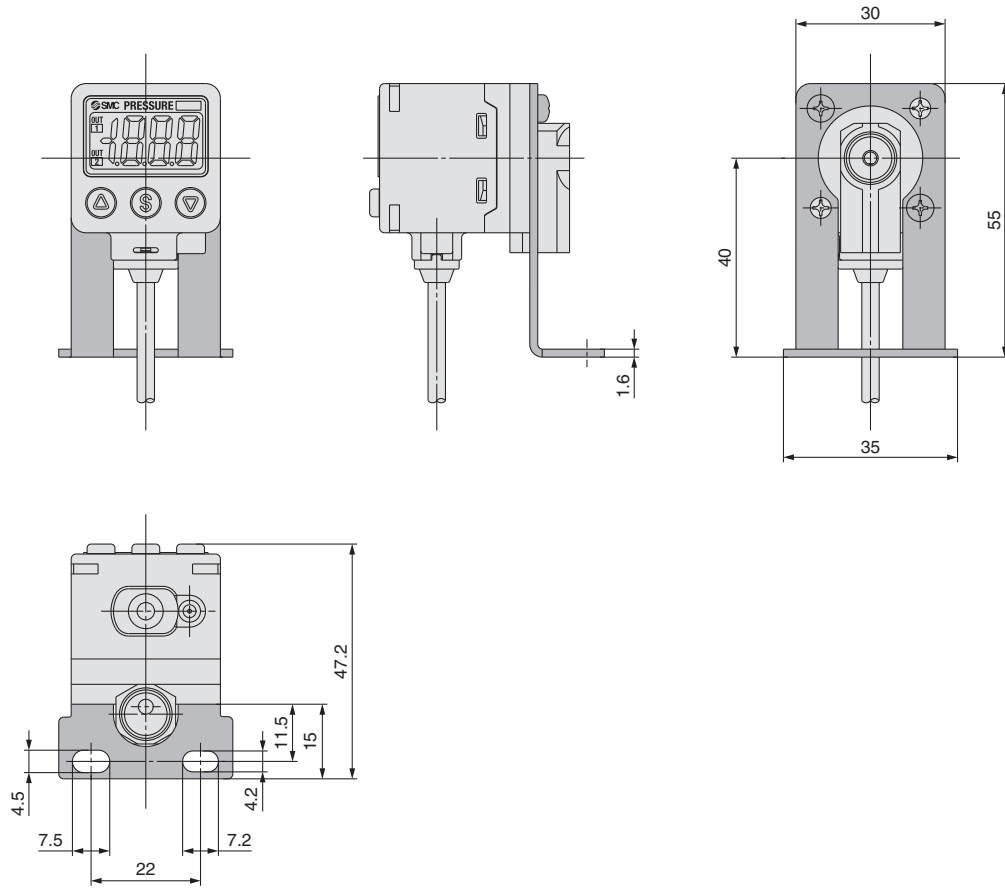




# Series ZSE40A(F)/ISE40A

## Dimensions


ZSE40A(F)/ISE40A-01-□-□E□  
-N01-□-□E□

### Panel mounting

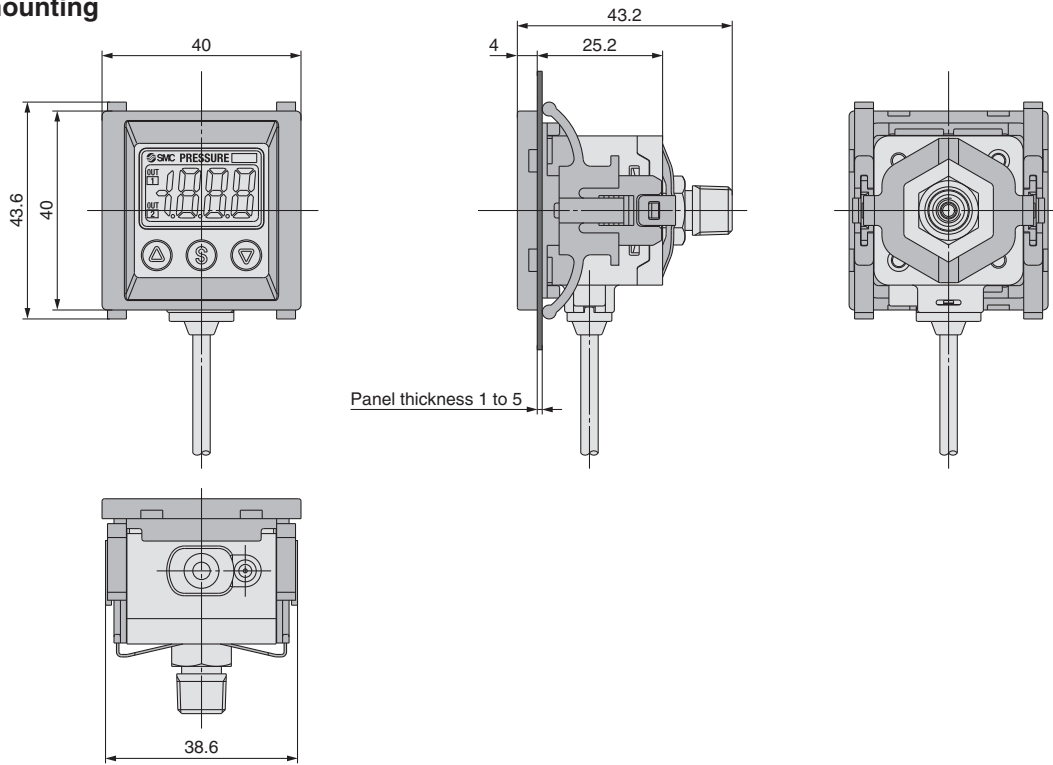

ZSE40A(F)/ISE40A-01-□-□F□  
-N01-□-□F□


### Panel mounting + Front protective cover

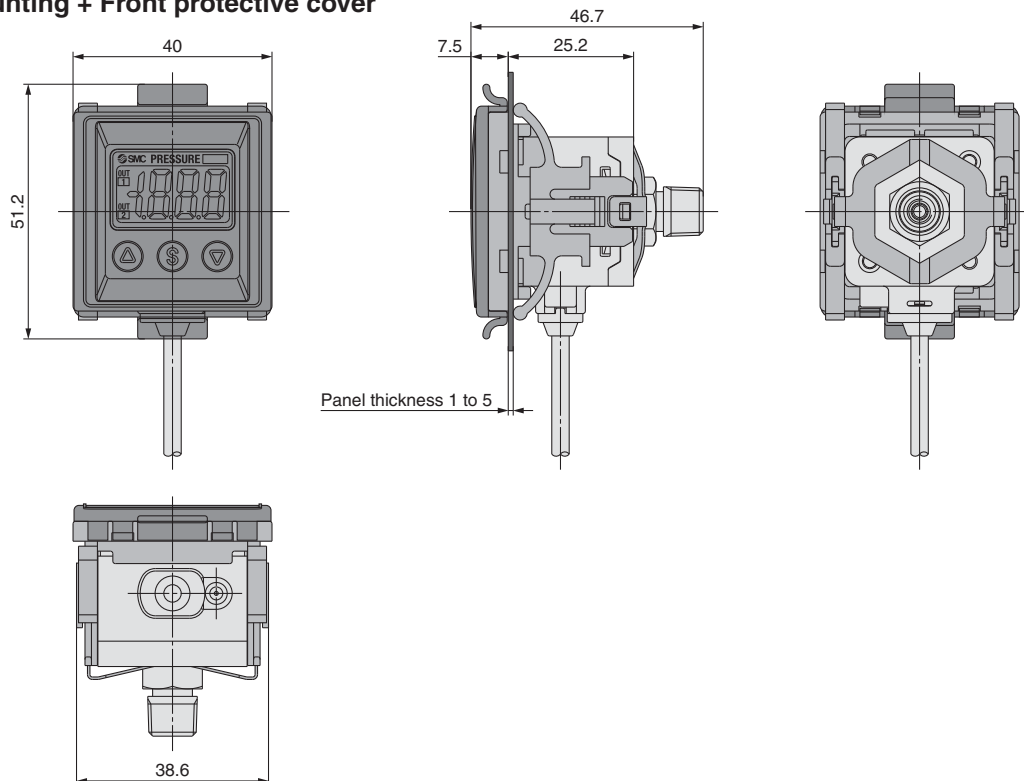

**Dimensions**


ZSE40A(F)/ISE40A-W1-□-□E□  
-WF1-□-□E□

**Panel mounting**

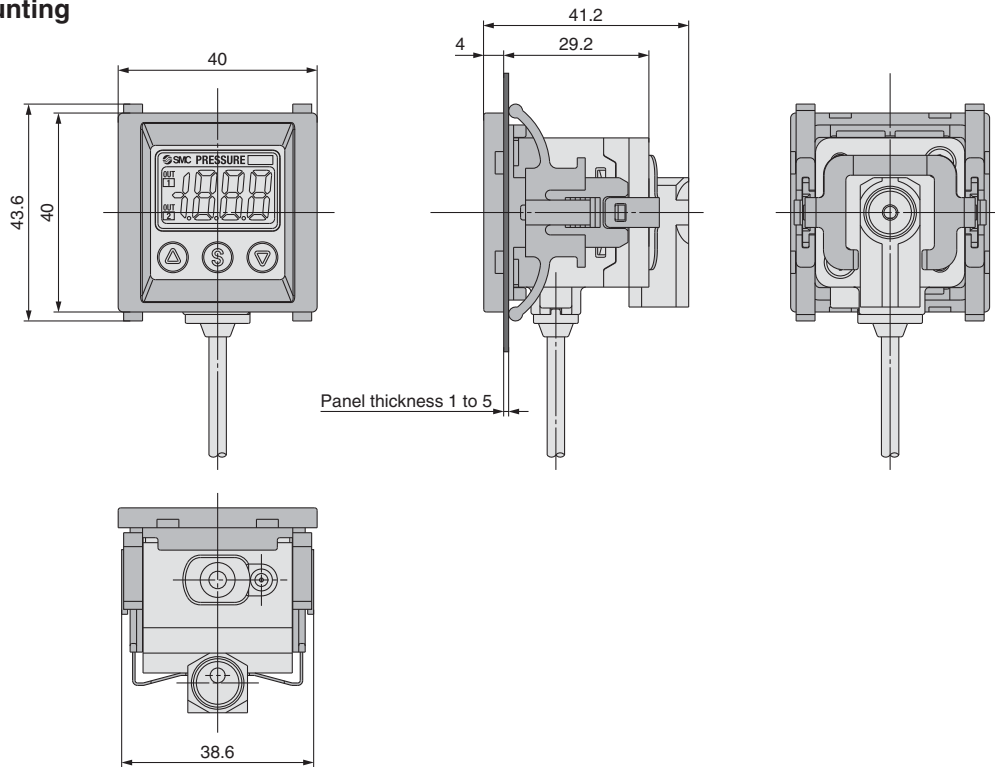

ZSE40A(F)/ISE40A-W1-□-□F□  
-WF1-□-□F□

**Panel mounting + Front protective cover**

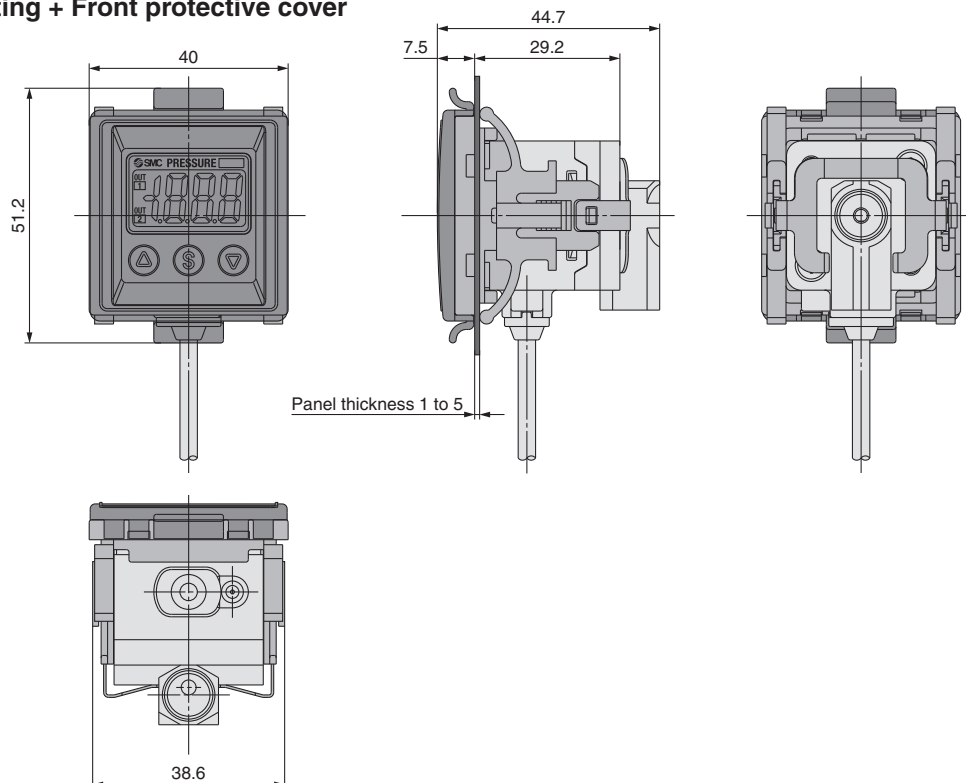


# Series ZSE40A(F)/ISE40A

## Dimensions


ZSE40A(F)/ISE40A-C4-□E□  
-C6-□E□

Panel mounting

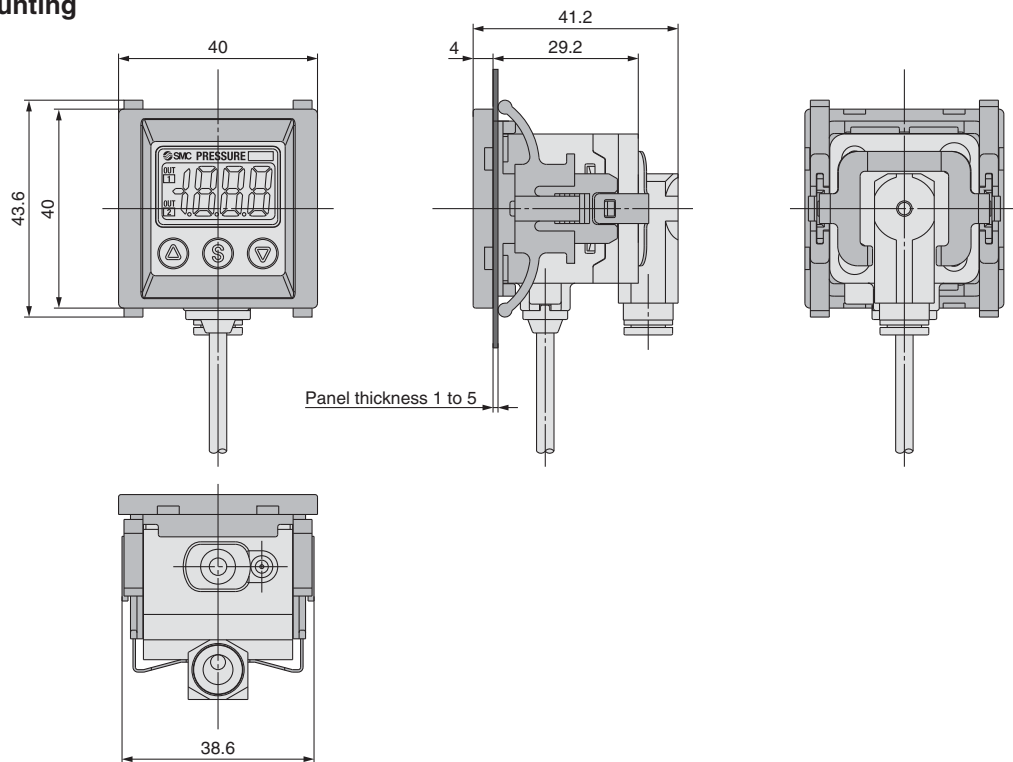


ZSE40A(F)/ISE40A-C4-□F□  
-C6-□F□

Panel mounting + Front protective cover

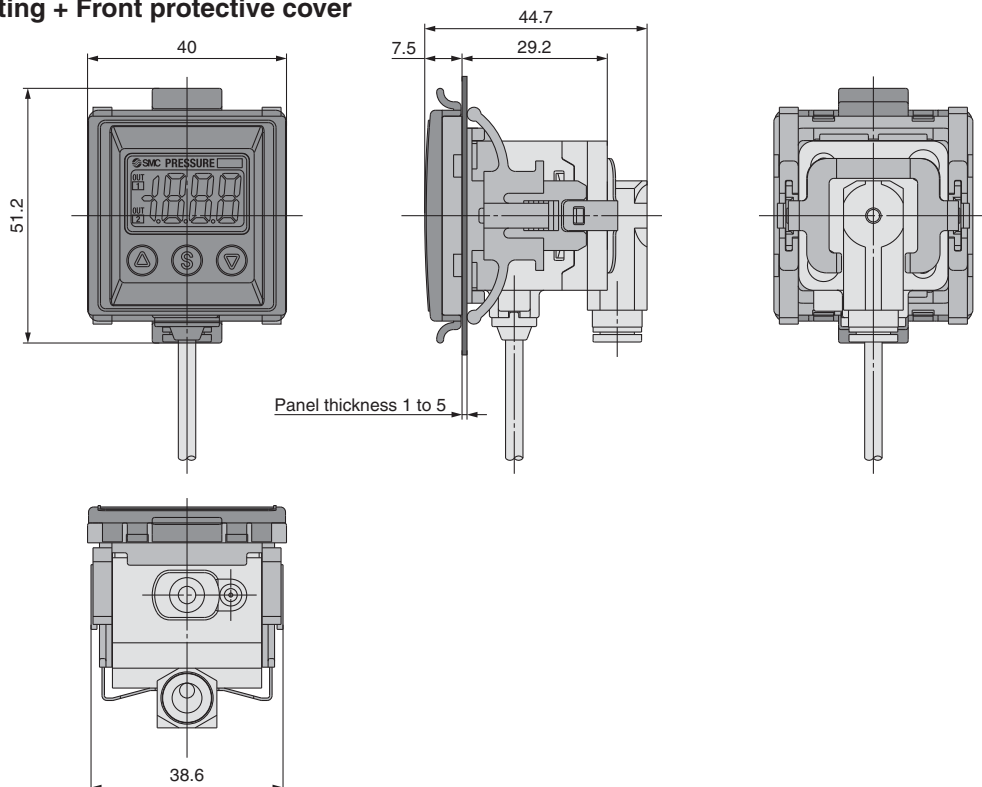

## Dimensions

### Panel fitting dimensions

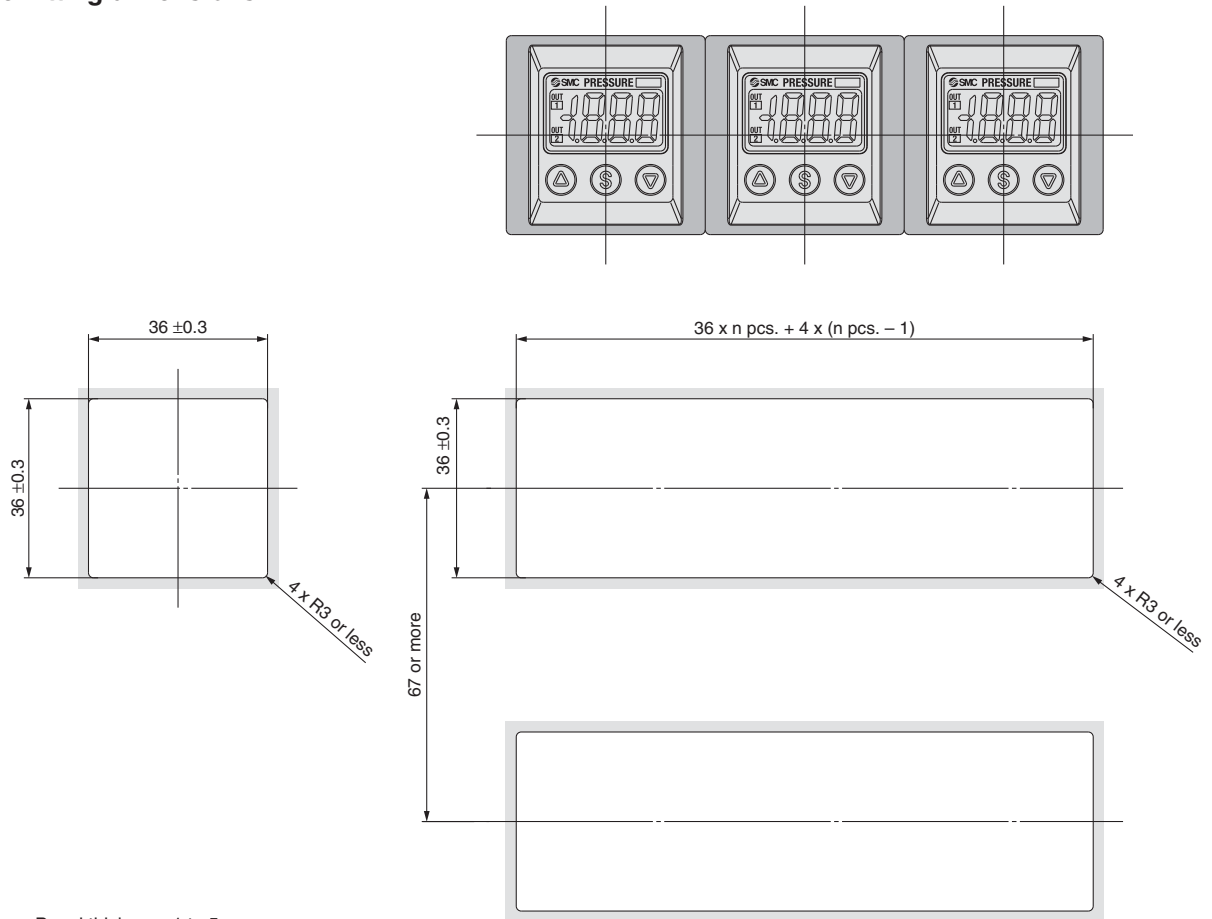

Panel thickness 1 to 5 mm

Note) This is the minimum value for the piping method O1 or N01.  
Take the piping material and tubing into account for design. When the corner is to have radius, it must be R3 or less.


## Function Details

### A Copy function (F97)

The settings of the master pressure switch can be copied to the slave pressure switches. This can reduce the labor for setting and prevent the entry of incorrect set-values.

**The set-value can be copied to up to 10 switches simultaneously.**

**(Maximum communication distance 4 m)**

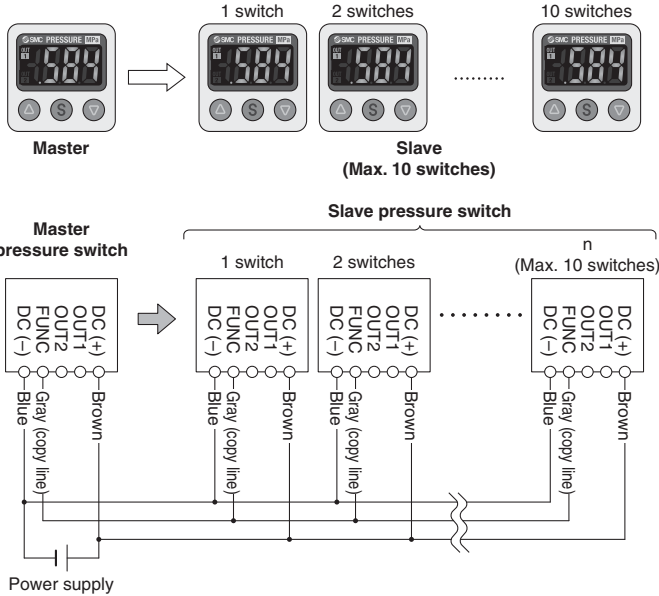


- 1) Wire as shown in the left figure.
- 2) Select the slave switch which is to be the master, and change it into a master using the buttons. (In the default setting, all switches are set as slaves.)
- 3) Press the **S** button of the master switch to start copying.

### B Auto-preset function (F 4)

Auto-preset function, when selected in the initial setting, calculates and stores the set-value from the measured pressure.

The optimum set-value is determined automatically by repeating vacuum and break with the target work piece several times.

#### Suction Verification

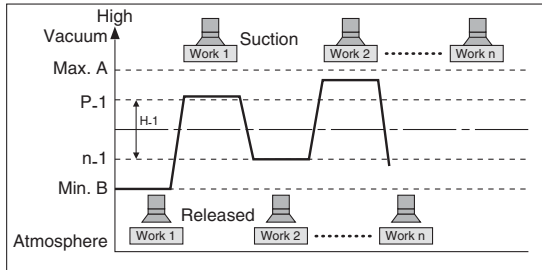


#### Formula for Obtaining the Set-Value

P_1 or P_2	H_1 or H_2
$P_1 (P_2) = A - (A-B)/4$	$H_1 (H_2) = (A-B)/2$
$n_1 (n_2) = B + (A-B)/4$	

### C Display calibration function (F 6)

Fine adjustment of the indicated value of the pressure sensor can be made within the range of  $\pm 5\%$  of the read value.

(The scattering of the indicated value can be eliminated.)

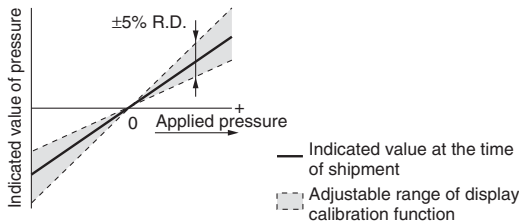

Note) When the display calibration function is used, the set pressure value may change  $\pm 1$  digit.

### D Peak and bottom display function

This function constantly detects and updates the maximum (minimum) value and allows to hold the maximum (minimum) pressure value.

When the **A** **V** buttons are simultaneously pressed for 1 second or longer, while "holding", the hold value will be reset.

### E Key lock function

This function prevents incorrect operations such as accidentally changing the set-value.

### F Zero-clear function

This function clears and resets the zero value on the display of measured pressure.

For the pressure switch with analog output, the analog output shifts according to the indication. The indicated value can be adjusted within  $\pm 7\%$  F.S. of the pressure when ex-factory. (ZSE40AF (for compound pressure)  $\pm 3.5\%$  F.S.)

The F□ in ( ) shows the function code number. Refer to the Operation Manual for the details of operation procedures and function codes.

**G Error indication function**

Error name	Error code	Description	Remedy
Overcurrent error	Er1	Load current of switch output (OUT1) exceeds 80 mA.	Turn the power off and remove the output factor for the overcurrent. Then, turn the power on.
	Er2	Load current of switch output (OUT2) exceeds 80 mA.	
Residual pressure error	Er3	During zero-clear operation, pressure over ±7% F.S. is applied. (ZSE40AF (compound) ±3.5% F.S.) After 1 second, the mode will reset to measurement mode. ±1% F.S. of the zero-clear range varies between individual products.	Perform zero-clear operation again after restoring the applied pressure to an atmospheric pressure condition.
Applied pressure error	HHH	Supply pressure exceeds the maximum set pressure.	Reset applied pressure to a level within the set pressure range.
	LLL	Supply pressure is below the minimum set pressure.	
Auto-shift error	or	The value measured at the time of auto-shift input is outside the set pressure range. * After displaying the error code for about 1 second, the switch returns to the measuring mode.	The controller does not respond to the auto-shift signal. Check the equipment and machinery for this point.
System error	Er0	Internal data error	Turn the power off and turn it on again. If the failure cannot be solved, ask SMC for repair.
	Er4		
	Er6		
	Er7		
	Er8		
	Er9		

If the above remedy cannot recover the operation, ask SMC for repair.


**H Anti-chattering function (F 3)**

A large bore cylinder or ejector consumes a large volume of air in operation and may experience a temporary drop in the supply pressure. This function prevents detection of such temporary drops in the supply pressure as an error.

Available response time settings
20 ms, 100 ms, 500 ms, 1000 ms, 2000 ms

<Principle>

This function averages pressure values measured during the response time set by the user and then compares the average pressure value with the pressure set point value to output the result on the switch.

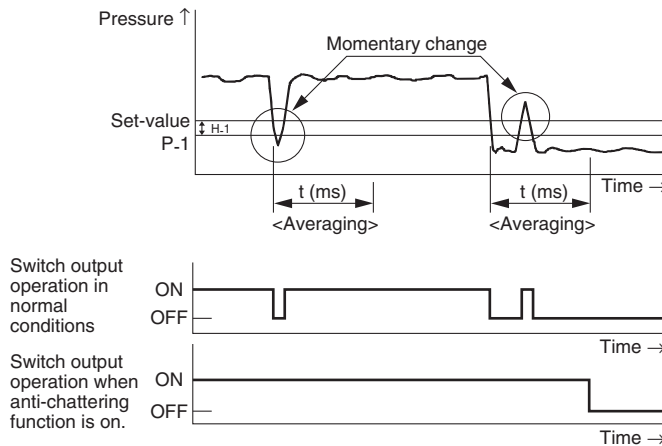

**I Display unit switching function (F 0)**

Display units can be switched with this function.

Display unit	PR		GF	bAr	PSI	inH	mmH
	kPa	MPa*	kgf/cm <sup>2</sup>	bar	psi	inHg	mmHg
Minimum unit setting							
ZSE40A (vacuum pressure)	0.1	0.001	0.001	0.001	0.01	0.1	1
ZSE40AF (compound pressure)	0.1	0.001	0.001	0.001	0.02	0.1	1
ISE40A (positive pressure)	1	0.001	0.01	0.01	0.1		

\* The ZSE40A (vacuum pressure) and ZSE40AF (compound pressure) will have different setting and display resolution when the unit is set to MPa.

The F□ in ( ) shows the function code number. Refer to the Operation Manual for the details of operation procedures and function codes.

## Function Details

### J Power-saving mode (F80)

Power-saving mode can be selected. It shifts to the power-saving mode without button operation for 30 seconds. It is set to the normal mode (Power-saving mode is OFF.) when ex-factory. (Decimal points and operation indicator light (only when the switch output is turned ON.) blink in the power-saving mode.)


### K Secret code setting (F81)

It can be set whether secret code input is required or not when key is locked. It is set to input no secret code when ex-factory.

### L Auto-shift function (F 5)

When there are large fluctuations in the supply pressure, the switch may fail to operate correctly. The auto-shift function compensates such supply pressure fluctuations. It measures the pressure at the time of auto-shift signal input and uses it as the reference pressure to correct the set-value on the switch.

#### Set-value correction by auto-shift function

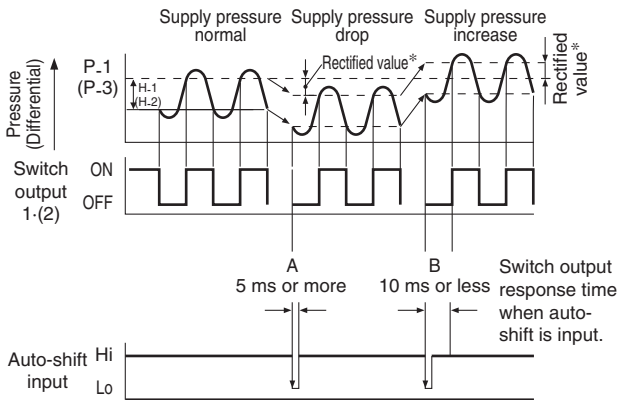

\* Rectified value

When the auto-shift is selected, "000" will be displayed for about 1 second, and the pressure value at that point will be saved as a rectified value "5". Based on the saved rectified values, the set-value of "1", "2", "H-1", and "H-2" will likewise be rectified.

Note) When an output is reversed, "n-1", "H-1", "n-2", "H-2" will be rectified.

#### Possible Set Range for Auto-Shift Input

	Regulating pressure range	Possible set range
Compound pressure	-15.22 to 15.22 psi	-30.4 to 30.4 psi
Vacuum pressure	1.45 to -15.23 psi	16.68 to -16.68 psi
Positive pressure	-15.2 to 152.3 psi	-167.5 to 167.5 psi

#### Auto-shift zero

The basic function of auto-shift zero is the same as the function for auto-shift. Also, it corrects values on the display, based on a pressure value of "0", when the auto-shift is selected.

# Series ZSE40A(F)/ISE40A

## Made to Order



Please contact SMC for detailed dimensions, specifications, and lead times.

### 1 Lead wire length 3 m

Symbol  
**-X501**

Lead wire is 3 meters.

#### How to Order



\* Refer to How to Order on page 1 for standard specifications.

ZSE40A(F)/ISE40A - [ ] - [ ] - [ ] - X501

Piping specifications\*

Output specifications\*

Option\*

### 2 M12 4-pin pre-wired connector

Symbol  
**-X531**


#### How to Order

ZSE40A(F)/ISE40A - [ ] - [ ] - [ ] - X531


Output specifications

X: NPN open collector 2 outputs

Y: PNP open collector 2 outputs

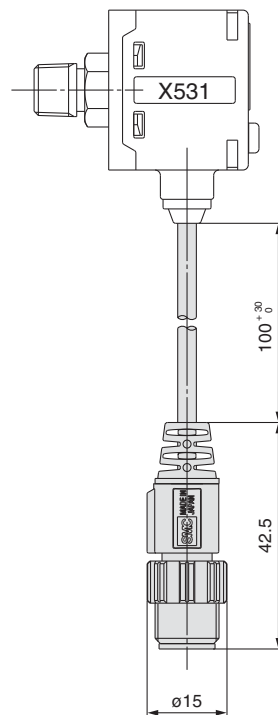

#### Pin arrangement

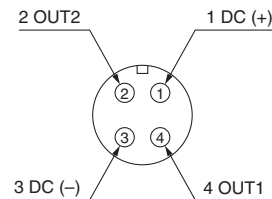








# Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC), American National Standards Institute (ANSI)\*1) and other safety regulations.

- \*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots - Safety.  
ANSI / (NFPA) T2.25.1 R2: Pneumatic fluid power - Systems standard for industrial machinery.  
NFPA (Fluid) T2.24.1 R1: Hydraulic fluid power - Systems standard for stationary industrial machinery.  
NFPA 79: Electrical Standard for Industrial Machinery.  
ANSI / RIA / ISO 10218 -1: Robots for Industrial Environment - Safety Requirements - Part 1 - Robot.  
etc.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

## Warning

### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.



# Safety Instructions

## Caution

### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.

If anything is unclear, contact your nearest sales branch.

## Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered.\*2)  
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.  
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

**\*2) Vacuum pads are excluded from this 1 year warranty.**

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.



# Series ZSE40A(F)/ISE40A Specific Product Precautions 1

Be sure to read before handling.

Refer to back pages 1 and 2 for Safety Instructions, “Handling Precautions for SMC Products” (M-E03-3) for Pressure Switches Precautions.

## Handling

### ⚠ Caution

1. Do not drop, bump, or apply excessive impacts (100 m/s<sup>2</sup>) while handling. Although the body of the sensor may not be damaged, the internal parts of the sensor could be damaged and lead to a malfunction.
2. The tensile strength of the cord is 49 N. Applying a greater pulling force on it can cause a malfunction. When handling, hold the body of the sensor—do not dangle it from the cord.
3. Do not exceed the screw-in torque of 7 to 9 N·m when connecting the pipe to the switch. Exceeding this torque may cause the switch to malfunction.
4. Do not use pressure sensors with corrosive and/or flammable gases or liquids.

## Connection

### ⚠ Caution

1. Incorrect wiring can damage the switch and cause a malfunction or erroneous switch output.
2. Connections should be done while the power is turned off.
3. Wire separately from power lines and high voltage lines, avoiding wiring in the same conduit with these lines. Malfunctions may occur due to noise from these other lines.
4. If a commercial switching regulator is used, make sure that the F.G. terminal is grounded.

## Operating Environment


### ⚠ Warning

1. This pressure switch is CE marked; however, it is not equipped with surge protection against lightning. Lightning surge countermeasures should be applied directly to system components as necessary.
2. This pressure switch does not have an explosion proof rating. Never use in the presence of an explosive gas as this may cause a serious explosion.

## Operating Environment

### ⚠ Caution

1. Do not use the product in a place where it could be splashed by oils or solvents.
2. When this pressure switch is used in a place where water and dust splash on, water and dust may enter inside the switch through the atmospheric vent port. Insert a  $\varnothing 4$  tube (I.D.  $\varnothing 2.5$ ) into the atmospheric vent port, and bring piping of the opposite side up to the safe position to keep it from water and dust. Do not bend the tube or close the hole of it. It causes malfunction with the measurement of positive pressure.

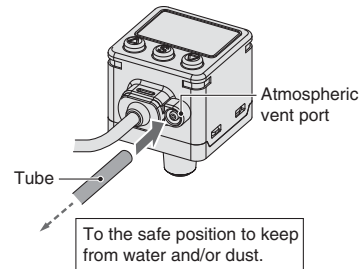

- \* Make sure that the tube is inserted to the end of the atmospheric vent port.
- \* Use SMC tubing, TU0425. (Material: Polyurethane, Tube O.D.  $\varnothing 4$ , I.D.  $\varnothing 2.5$ )

3. Take measures against static electricity with equipment when this switch is used in connection with resin piping. Also, the ground should be separate from that of the units that generate strong electromagnetic noise or high frequency, otherwise, the switch can be damaged by static electricity.



# Series ZSE40A(F)/ISE40A Specific Product Precautions 2


Be sure to read before handling.

Refer to back pages 1 and 2 for Safety Instructions, "Handling Precautions for SMC Products" (M-E03-3) for Pressure Switches Precautions.

## Mounting


### Caution

#### 1. Mounting with panel mount adapter

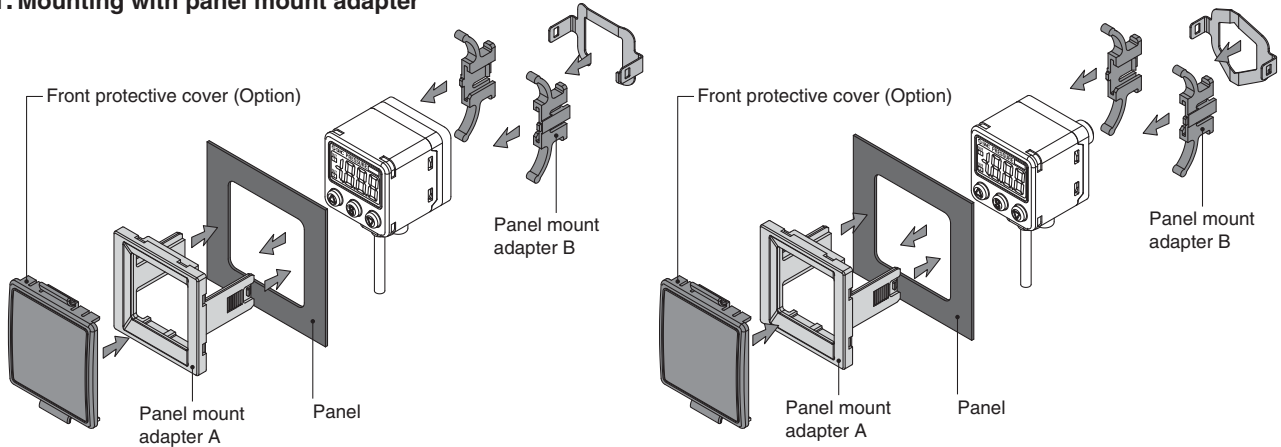

#### 2. Mounting with bracket

Mount a bracket to the using two mounting screws and install on piping. The switch can be installed horizontally depending on the installation location.

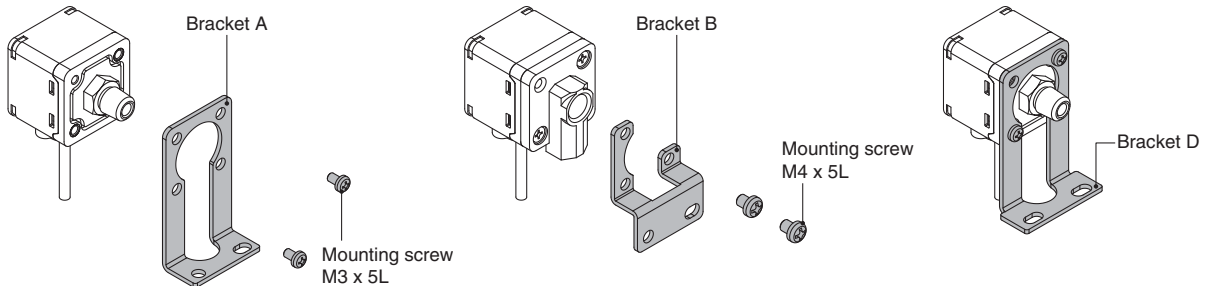

The tightening torque for bracket mounting screw should be 0.5 to 0.7 N·m for M3 and 1.4 to 1.6 N·m for M4.

## Set Pressure Range and Rated Pressure Range

### Caution

Set the pressure within the rated pressure range.

The set pressure range is the range of pressure that is possible in setting.

The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) on the switch.

Although it is possible to set a value outside the rated pressure range, the specifications will not be guaranteed even if the value stays within the set pressure range.

Switch	Pressure range				
	-14.5 psi	0	14.5 psi	72.5 psi	145 psi
For vacuum pressure <b>ZSE40A</b>	-14.69 psi	0			
	-15.23 psi	1.45 psi			
For compound pressure <b>ZSE40AF</b>	-14.5 psi	14.5 psi			
	-15.22 psi	15.22 psi			
For positive pressure <b>ISE40A</b>	-14.5 psi	145 psi			
	-15.2 psi	152.3 psi			

Rated pressure range of switch  
 Set pressure range of switch

# Related Equipment

## 2-Color Display High Precision Digital Pressure Switch *ZSE/ISE30A*



Series	Type	Rated pressure range
<b>ZSE30AF</b>	Compound pressure	-14.50 to 14.50 psi
<b>ZSE30A</b>	Low pressure/vacuum	0.00 to -14.65 psi
<b>ISE30A</b>	Positive pressure	-14.5 to 145.0 psi
Features	<ul style="list-style-type: none"> <li>• With one-touch fitting (Straight, Elbow)</li> <li>• Space-saving, capable of vertical and horizontal contact mounting</li> <li>• With display calibration function</li> <li>• Simultaneous copying is possible for maximum 10 units.</li> <li>• IP40</li> </ul>	

## 2-Color Display Digital Pressure Switch *ZSE/ISE80*



Series	Type	Rated pressure range
<b>ZSE80F</b>	Compound pressure	-14.50 to 14.50 psi
<b>ZSE80</b>	Vacuum pressure	0.00 to -14.65 psi
<b>ISE80</b>	Positive pressure	-14.5 to 145.0 psi
<b>ISE80H</b>	Positive pressure	-14.5 to 290 psi
Features	<ul style="list-style-type: none"> <li>• Suitable for a wide variety of fluids with stainless diaphragm</li> <li>• IP65</li> <li>• RoHS compliant</li> <li>• Low leakage. VCR®, Swagelok® compatible fittings can be selected.</li> <li>• With one-touch fittings (Straight, Elbow)</li> <li>• Back piping, underside piping</li> </ul>	

\* VCR® and Swagelok® are trademarks of Swagelok Company.

# Global Manufacturing, Distribution and Service Network

## Worldwide Subsidiaries

### EUROPE

**AUSTRIA**  
SMC Pneumatik GmbH (Austria)

**BELGIUM**  
SMC Pneumatics N.V./S.A.

**BULGARIA**  
SMC Industrial Automation Bulgaria EOOD

**CROATIA**  
SMC Industrijska Automatika d.o.o.

**CZECH**  
SMC Industrial Automation CZ s.r.o.

**DENMARK**  
SMC Pneumatik A/S

**ESTONIA**  
SMC Pneumatics Estonia

**FINLAND**  
SMC Pneumatics Finland OY

**FRANCE**  
SMC Pneumatique S.A.

**GERMANY**  
SMC Pneumatik GmbH

**GREEK**  
SMC Hellas EPE

**HUNGARY**  
SMC Hungary Ipari Automatizálási Kft.

**IRELAND**  
SMC Pneumatics (Ireland) Ltd.

**ITALY**  
SMC Italia S.p.A.

**LATVIA**  
SMC Pneumatics Latvia SIA

**LIETUVA**  
SMC Pneumatics Lietuva, UAB

**NETHERLANDS**  
SMC Pneumatics BV

**NORWAY**  
SMC Pneumatics Norway A/S

**POLAND**  
SMC Industrial Automation Polska Sp.z.o.o.

**ROMANIA**  
SMC Romania S.r.l.

**RUSSIA**  
SMC Pneumatik LLC.

**SLOVAKIA**  
SMC Priemyselna Automatizacia, s.r.o.

**SLOVENIA**  
SMC Industrijska Avtomatika d.o.o.

**SPAIN/PORTUGAL**  
SMC España, S.A.

**SWEDEN**  
SMC Pneumatics Sweden AB

**SWITZERLAND**  
SMC Pneumatik AG

**UK**  
SMC Pneumatics (U.K.) Ltd.

### ASIA

**CHINA**  
SMC (China) Co., Ltd.

**HONG KONG**  
SMC Pneumatics (Hong kong) Ltd.

**INDIA**  
SMC Pneumatics (India) Pvt. Ltd.

**JAPAN**  
SMC Corporation

**MALAYSIA**  
SMC Pneumatics (S.E.A.) Sdn. Bhd.

**PHILIPPINES**  
SMC Pneumatics (Philippines), Inc.

**SINGAPORE**  
SMC Pneumatics (S.E.A.) Pte. Ltd.

**SOUTH KOREA**  
SMC Pneumatics Korea Co., Ltd.

**TAIWAN**  
SMC Pneumatics (Taiwan) Co., Ltd.

**THAILAND**  
SMC Thailand Ltd.

### NORTH AMERICA

**CANADA**  
SMC Pneumatics (Canada) Ltd.

**MEXICO**  
SMC Corporation (Mexico) S.A. DE C.V.

**USA**  
SMC Corporation of America

### SOUTH AMERICA

**ARGENTINA**  
SMC Argentina S.A.

**BOLIVIA**  
SMC Pneumatics Bolivia S.R.L.

**BRAZIL**  
SMC Neumaticos do Brazil Ltda.

**CHILE**  
SMC Pneumatics (Chile) S.A.

**VENEZUELA**  
SMC Neumatica Venezuela S.A.

### OCEANIA

**AUSTRALIA**  
SMC Pneumatics (Australia) Pty. Ltd.

**NEW ZEALAND**  
SMC Pneumatics (N.Z.) Ltd.

## U.S. & Canadian Sales Offices

### EAST

Atlanta  
Boston  
Charlotte  
Nashville  
New Jersey  
Richmond  
Rochester  
Tampa

### WEST


Austin  
Dallas  
Los Angeles  
Phoenix  
Portland  
San Francisco

### MIDWEST

Chicago  
Cincinnati  
Cleveland  
Detroit  
Indianapolis  
Milwaukee  
Minneapolis  
St. Louis

### CANADA

Montreal  
Toronto  
Vancouver  
Windsor

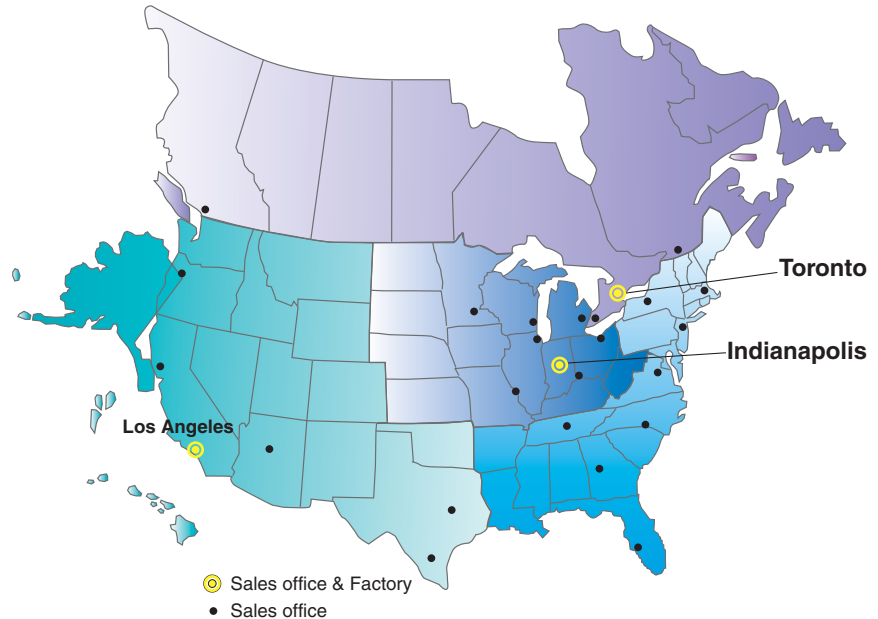

**SMC Corporation of America**  
10100 SMC Blvd., Noblesville, IN 46060 [www.smcusa.com](http://www.smcusa.com)  
**(800) SMC.SMC1 (762-7621)**  
For International inquires: [www.smcworld.com](http://www.smcworld.com)