


Diaphragm Type Pilot Operated 2 Port Solenoid Valve for High Pressure

Series VXH



- Orifice diameter $\phi 10$
- Max. operating pressure: 2.0 MPa

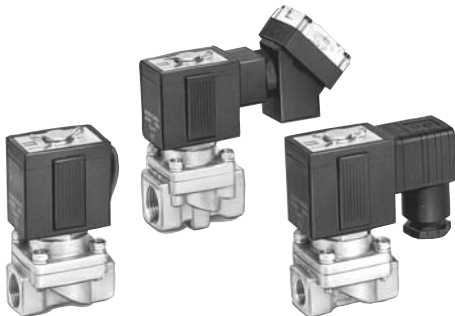

Valve Specifications

Port size	Orifice dia. (mm ϕ)	Min. operating pressure differential (MPa)	Max. operating pressure differential (MPa)			Flow characteristics					Max. system pressure (MPa)	Note) Mass (g)
			Water	Air	Oil	Water, Oil, Steam		Air				
						$Av \times 10^{-6} m^2$	Cv converted	C[dm ³ /(s·bar)]	b	Cv		
1/4	10	0.05	2.0	2.0	1.5	46	1.9	8.5	0.35	2.0	2.0	550
3/8						58	2.4	9.5	0.30	2.3		550
1/2						58	2.4	9.5	0.30	2.3		630



Note) Mass of grommet type. Add 10 g for conduit type, 30 g for DIN terminal, 60 g for conduit terminal type respectively.
 • Refer to "Glossary of Terms" on page 26 for details of max. operating pressure differential and max. system pressure.

Solenoid Specifications

Power source	Frequency (Hz)	Apparent power (VA)		Power consumption (W) (Holding)	Temperature rise (°C) (Rated voltage)
		Inrush	Holding		
AC	50	53	18	7.5	60
	60	44	12	6	50

How to Order

JIS Symbol



VXH2230-02-1G - [] - []

- 2 port valve for high pressure**
- Valve/Body**
0 Normally Closed/Single unit
- Port size**

02	Rc 1/4
03	Rc 3/8
04	Rc 1/2
- Rated voltage**

1	100 VAC 50/60 Hz
2	200 VAC 50/60 Hz
3	110 VAC 50/60 Hz
4	220 VAC 50/60 Hz
7	240 VAC 50/60 Hz
8	48 VAC 50/60 Hz
9	Other (Only AC)
- Bracket**

Nil	None
B	With bracket
- Electrical option**

Nil	None
S	With surge voltage suppressor
L	With indicator light
Z	With light/surge voltage suppressor

* Refer to the table (1) given below for availability.
- Electrical entry**

G	Grommet
C	Conduit
D	DIN terminal
T	Conduit terminal

* Refer to the table (1) given below for availability.

Caution

Be sure to read before handling. Refer to front matters 42 and 43 for Safety Instructions, and pages 17 to 19 for precautions for 2 Port Solenoid Valve for Fluid Control.

**Table (1)
Rated Voltage—
Electrical Entry—Electrical Option**

Insulation type	Class B			
	G	C	D, T	S, L, Z
Electrical entry	G	C	D, T	S, L, Z
Electrical option	S ^{Note)}	-	S	L, Z
AC	1 (100 V)	●	●	●
	2 (200 V)	●	●	●
	3 (110 V)	●	●	●
	4 (220 V)	●	●	●
	7 (240 V)	●	●	-
8 (48 V)	●	●	-	

Note) Surge voltage suppressor is attached in the middle of lead wire.

VX2

VXD

VXZ

VXE

VXP

VXR

VXH

VXF

VX3

VXA

VCH□

VDW

VQ

LVM

VCA

VCB

VCL

VCS

VCW

