

FEATURES

- > Handles liquid/gas mixture
- > Self priming
- > High flow
- > High pressure
- > Compact design
- > Reduced pulsation
- > Bubble free media transfer

TYPICAL APPLICATIONS


- >Ink Jet Printers
- > Diagnostic Workstations
- > Fuel Cells



1210 DC 1210 LC






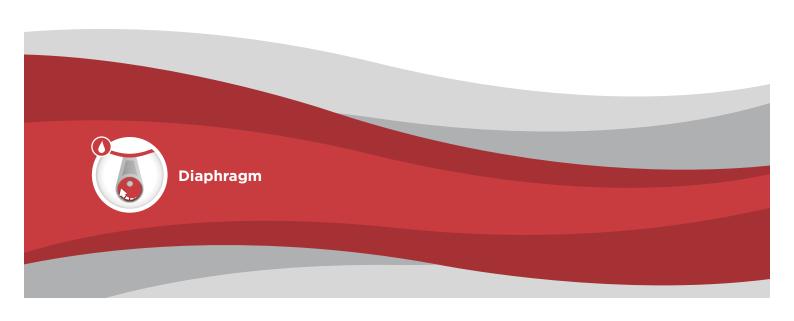

Diaphragm Liquid Pump 1210 DC

Flow	180 ml/min
Pressure height	up to 80 m H₂O
Suction height	6 m H₂O



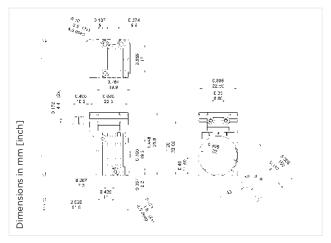

HYDRAULIC DATA

Description		1210 DC PP/EPDM	1210 DC PP/FPM
Part number	12 V DC	12100001	12100051
	24 V DC	12100002	12100052
Max. flow		180 ml/min	150 ml/min
Max. intermittent p	ressure height	80 m H ₂ O	60 m H₂O
Max. continuous pr	essure height	30 m H₂O	30 m H ₂ O
Max. suction height		6 m H₂O	5 m H₂O

ELECTRICAL DATA

Motor type	Ironless Core DC	Ironless Core DC
Nominal speed	2800 rpm	2700 rpm
Nominal voltage	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H ₂ O	1,5 W	1,6 W
Motor insulation class	Н	Н
Protection class	IP00	IP00
EMC protection	yes	yes

GENERAL DATA


Ambient temperature	- 30 to 60 °C	- 30 to 60 °C
Media temperature	5 to 60 °C	5 to 60 °C
Weight	0,073 kg	0,073 kg

WETTED PARTS

Pump head	PP	PP
Diaphragm	EPDM	FPM
Valves	EPDM	FPM

The technical data is related to a Polyurethane tubing, OD 6mm x ID 4mm, Hardness Shore D 45.



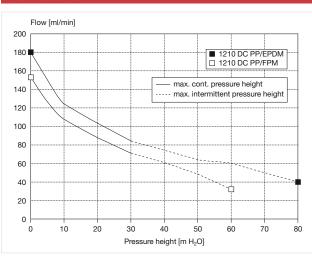


1210... Stock programme

Diaphragm Liquid Pump 1210 LC

Flow	180 ml/min
Pressure height	up to 80 m H₂O
Suction height	6 m H₂O



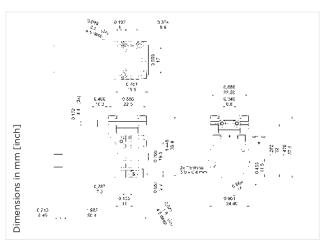

HYDRAULIC DATA Description 1210 LC PP/EPDM 1210 LC PP/FPM Part number 12 V DC 12100003 12100053 24 V DC 12100004 12100054 Max. flow 180 ml/min 150 ml/min Max. intermittent pressure height 80 m H₂O 60 m H₂O

Max. Intermittent pressure height $80 \text{ m H}_2\text{O}$ $60 \text{ m H}_2\text{O}$ Max. continuous pressure height $30 \text{ m H}_2\text{O}$ $30 \text{ m H}_2\text{O}$ Max. suction height $6 \text{ m H}_2\text{O}$ $5 \text{ m H}_2\text{O}$

	EL	ECT	RI	CA	LD	ATA
--	----	-----	----	----	----	-----

Motor type	Permanent Magnet	Permanent Magnet
Nominal speed	3100 rpm	3000 rpm
Nominal voltage	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H₂O	2,2 W	2,3 W
Motor insulation class	В	В
Protection class	IP00	IP00
EMC protection	yes	yes


GENERAL DATA

Ambient temperature	- 30 to 60 °C	- 30 to 60 °C
Media temperature	5 to 60 °C	5 to 60 °C
Weight	0,063 kg	0,063 kg

WETTED PARTS

Pump head	PP	PP
Diaphragm	EPDM	FPM
Valves	EPDM	FPM

The technical data is related to a Polyurethane tubing, OD 6mm x ID 4mm, Hardness Shore D 45.

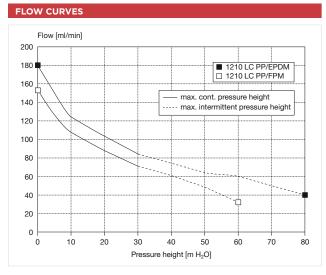

1210... Stock programme



PUMP AND COMPRESSOR SOLUTIONS FOR OEMS WORLDWIDE

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection there with. Thomas does not warrant, guarantee or assume any obligation or liability in connection with this information.

Models presented in this catalog are representative of the product family. Photos of products pictured in this catalog do not necessarily represent a specific model number. To obtain further information for custom options, contact your local Thomas office.

Printed in Germany Form No. 17000223 03/2015 © Gardner Denver Thomas GmbH. All rights reserved.

