

SERIES: AUTO RECIPROCATING AIR BOOSTER

Model Number: AB121

This 2:1 ratio air-to-air booster is compact and self-contained. Unit incorporates integral valve components to perform auto-reciprocating function.

Can amplify inadequate air pressure in the following situations:


- Cylinders or Grippers: When space isn't available, a smaller bore or model size can be used with higher input PSI to achieve the desired output or grip force.
- Problem solver: Sometimes a cylinder or gripper was sized for an application, but in use, does not perform up to the production requirements. Increasing the input PSI can provide a quick and cost effective solution.



Model	Dimensions (inch)
<p>Model Number: AB121</p> <p>Availability: Stock Item</p> <p>Maximum Inlet Pressure: 125</p> <p>Prelubricated with HT-99</p>	


Engineering Specifications

- Maximum Input Pressure:** 125 psi
- Operating Temperature:** 15° to 160°F
- Lubrication:** HT-99 oil
- Bodies and Center Section:** Aluminum; Hard Coat with PTFE
- Mounting Plate:** Anodized Aluminum

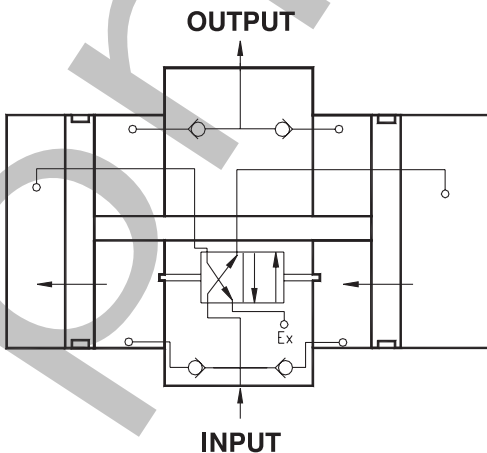

SCHEMATIC

FLOW DATA



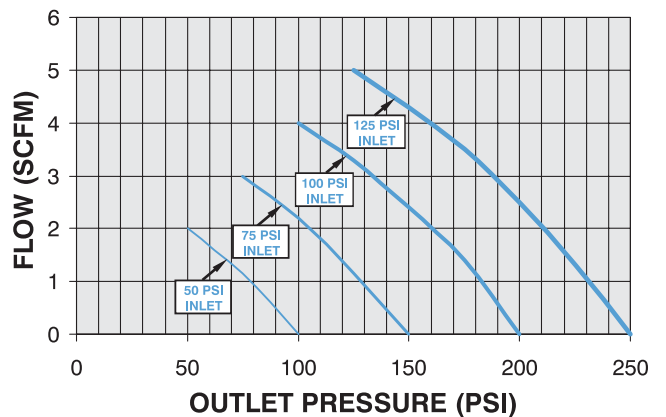


SERIES: AB121 WITH AIR RESERVOIR



Model AB121 Air Booster furnished with Air Reservoir. Anodized Aluminum Tube and End Cap construction.

How to order:

AB121 - ARB 800 X

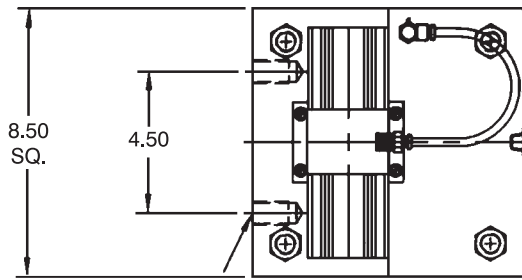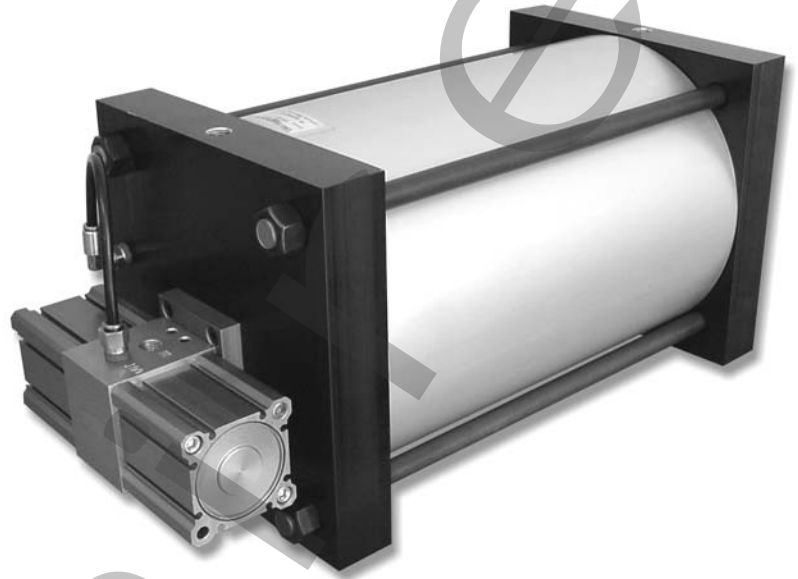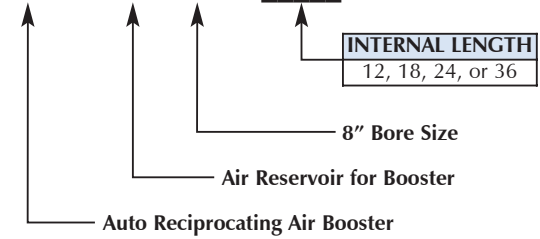

(4) 3/4-10 TAP
X 1 1/8 DEEP

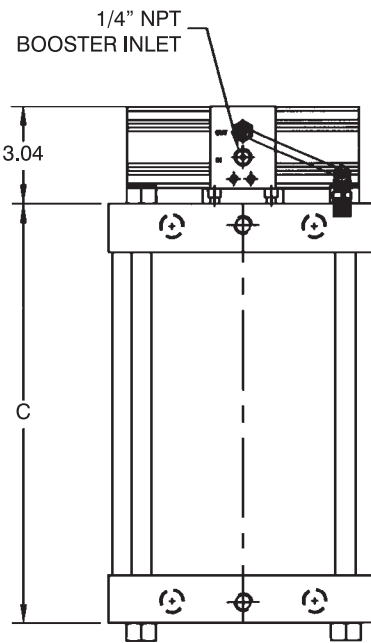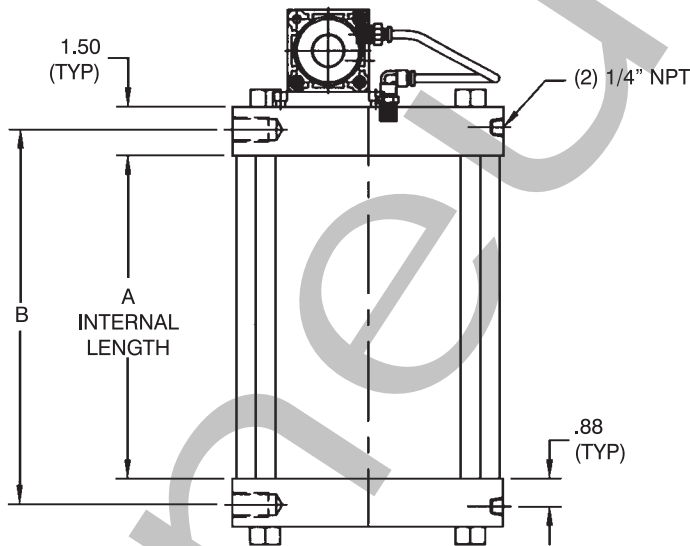

SERIES AB121-ARB800 X _____ AIR BOOSTER MODEL AB121 MOUNTED AND PIPED TO ARB800 AIR RESERVOIR



PART NUMBER & VOLUME					INTERNAL LENGTH (inches)	DIMENSIONS	
PART NO.	TANK BORE	AREA	GAL. PER IN. OF TANK	TOTAL CU. FT. PER TANK *	A	B	C
AB121-ARB800 X 12	8	50.26	.2175	.349	12	13 ⁵ / ₈	15
AB121-ARB800 X 18	8	50.26	.2175	.523	18	19 ⁵ / ₈	21
AB121-ARB800 X 24	8	50.26	.2175	.698	24	25 ⁵ / ₈	27
AB121-ARB800 X 36	8	50.26	.2175	1.047	36	37 ⁵ / ₈	39

*Internal Volume of reservoir.

SERIES: AIR RESERVOIR

Stand-alone Air Reservoir from 2½" to 10" bore size. Anodized Aluminum Tube and End Cap, Steel Mounting Bracket construction.

How to order:

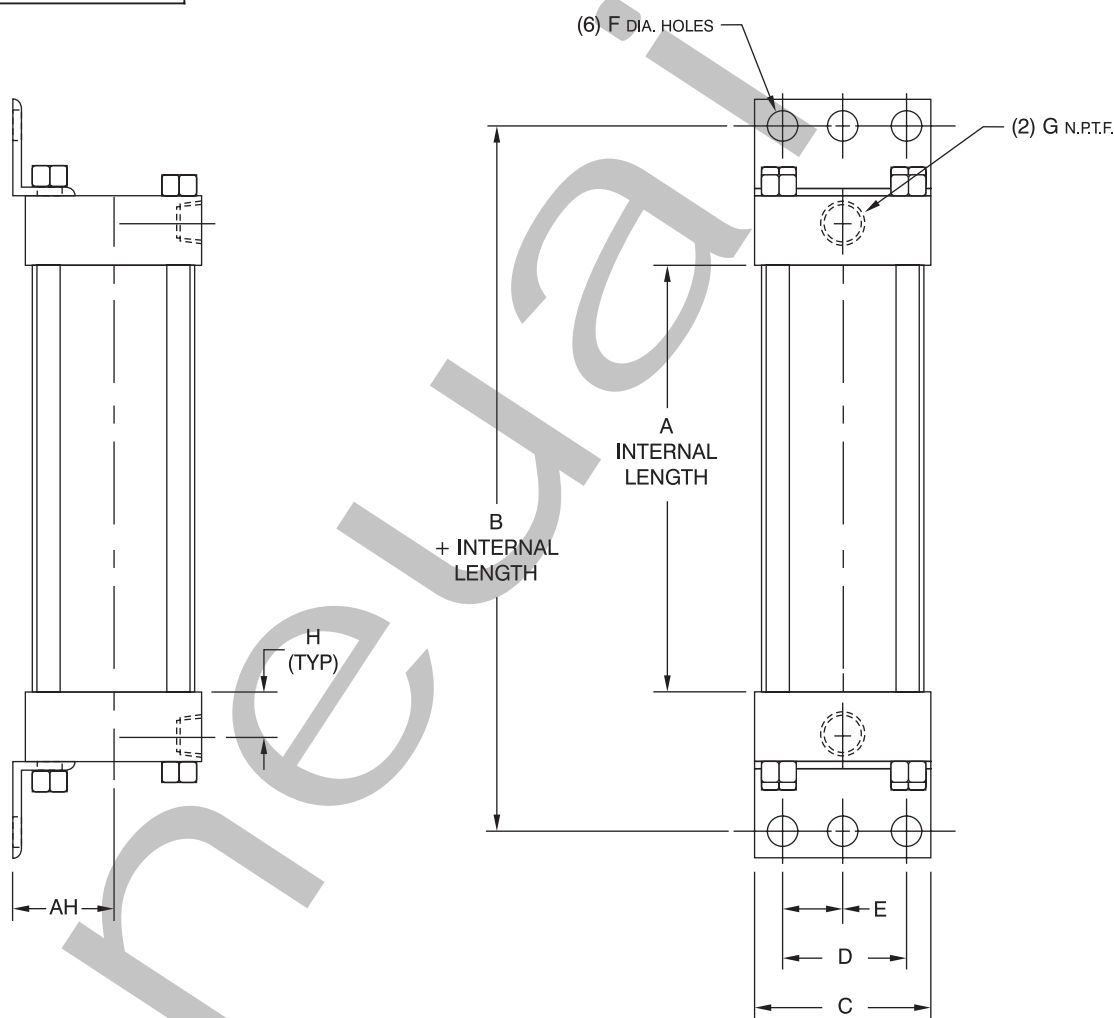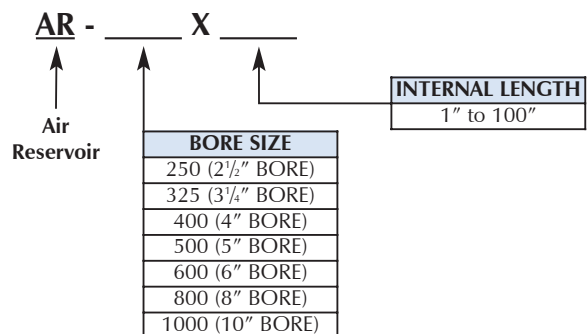

AR SERIES (AIR RESERVOIR)

PART NUMBER & VOLUME				DIMENSIONS								
PART NO.	BORE	AREA	GAL. PER IN. OF RESERVOIR*	+ INTERNAL LENGTH		AH	C	D	E	F	G	H
				A	B							
AR-250	2½	4.909	.0213	0	4	1⅝	3	2¼	1⅛	7/16	3/8	5/8
AR-325	3¼	8.29	.0359	0	5	1⅜	3¾	2¾	1⅜	9/16	1/2	5/8
AR-400	4	12.56	.0544	0	5	2¼	4½	3½	1¾	9/16	1/2	3/4
AR-500	5	19.64	.085	0	5¼	2¾	5½	4¼	2⅞	11/16	1/2	3/4
AR-600	6	28.27	.122	0	5¾	3¼	6½	5¼	2⅝	13/16	3/4	7/8
AR-800	8	50.26	.2175	0	6⅝	4¼	8½	7⅞	3⅞	13/16	3/4	7/8
AR-1000	10	78.54	.340	0	7⅝	5⅞	10⅝	8⅝	4⅞	13/16	1	1⅞

*Internal Volume of reservoir.

SERIES: AIR TO AIR INTENSIFIER AIR TO HYDRAULIC INTENSIFIERS

"Air to Air" or "Air to Hydraulic" intensifiers are Single-Shot, one output per stroke design.

Benefits of Air to Air Intensifiers:

- Quick Response
- High Volume Outputs Available
- Simple Design
- Heavy-Duty Construction

Benefits of Air to Hydraulic Intensifiers:

- Quick Response
- High Volume Outputs Available
- Intensified Material Can Be Oil or Other Media
- Can Be Used For Measuring and Dispensing

HOW TO ORDER: INTENSIFIERS

CYL. #1

AI - TA - MS4 - 5 x **10** - MPR

WITH

CYL. #2

MXO - 2 1/2 X **10** - TH

SERIES

TA	250 PSI AIR
TD	250 PSI AIR
SS	STAINLESS STEEL (303, 304) (Refer to Cat. # CAT-TRDSS-602 for ordering information)

NFPA MOUNTS

MXO	NO MOUNT (1 1/2" - 12" Bore)
MF1	FRONT FLANGE (1 1/2"-6" Bore)
MS2	SIDE LUG (1 1/2"-4" Bore STD., 5" & ABOVE CONSULT FACTORY)
MS4	BOTTOM TAPPED HOLES (1 1/2" - 12" Bore)


BORE

CYL. 1	CYL. 2
3 1/4	1 1/2
4	2
5	2 1/2
6	3 1/4
8	4
10	5
12	6
—	8

STROKE (CYL. #1)
0" to 50"
Made to Order

OPTIONS (CYL. #1 or CYL. #2)
ADDS LENGTH TO CYLINDER - SEE "OPTION LENGTH ADDER" CHART BELOW.

X	AS	ADJUSTABLE STROKE - RETRACT (SPECIFY LENGTH, Example: AS = 4")
X	BC	1/4" URETHANE BUMPER BOTH ENDS
X	BH	1/4" URETHANE BUMPER HEAD ONLY
	BP	BUMPER PISTON SEALS (1 1/2" - 8" Bore)
	H	HEAD CUSHION
	C	CAP CUSHION
	EN	ELECTROLESS NICKEL PLATED (Refer to page 84 for specifications)
	MA	MICRO-ADJUST (6" MAX. STROKE) Available on Double Rod End Models
	MAB	MICRO-ADJUST WITH SOUND DAMPENING BUMPER (6" MAX. STROKE)
	MPR	MAGNETIC PISTON FOR REED OR SOLID STATE SWITCHES - TRD MODELS: R10, RAC, AND MSS (Refer to pages 105-111 for selection)
	MPH	MAGNETIC PISTON FOR HALL SWITCHES
	OP	OPTIONAL PORT LOCATION (Example: Ports @ 3 & 7)
	SAE	SAE PORTS (SPECIFY SIZE, Example: SAE #10)
	SSA	STAINLESS STEEL PISTON ROD, TIE RODS & NUTS, AND FASTENERS
	SSF	STAINLESS STEEL FASTENERS
	SSP	SOLID STAINLESS STEEL PISTON
	SSR	STAINLESS STEEL PISTON ROD
	SST	STAINLESS STEEL TIE RODS & NUTS
	TH	400 PSI HYDRAULIC NON-SHOCK (Refer to page 90 for specifications)
	VS	FLUOROCARBON SEALS
	WB	PISTON WEAR BAND
	XX	SPECIAL VARIATION (SPECIFY)

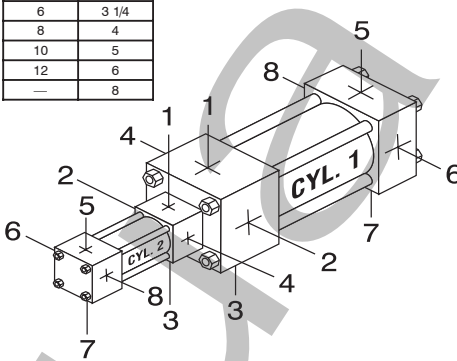

STANDARD PORT AND CUSHION ADJUSTMENT POSITIONS

- Ports - Positions 1 and 5 (both cylinders)
- Cushion Adjustment - Positions 2 and 6 (CYL. #1), Positions 4 and 8 (CYL. #2)
- Specify Non-Standard Positions When Ordering

About our Part Number System

- Simple, easy to understand
- No excessive codes!
- Eliminates mistakes when ordering

Example:
Cyl. 1 is a standard 'TA' series, MS4 mount, 5" bore X 10" stroke, with a magnet (for Reed Switches), Air-to-Hydraulic Cylinder.
Cyl. 2 is a 'TA' series, MXO (no mount), 2 1/2" bore X 10" stroke with "TH" option.

Part Number:
AI - TA - MS4 - 5 x 10 - MPR with
TA - MXO - 2 1/2 x 10 - TH

AIR TO AIR / AIR TO HYDRAULIC INTENSIFIER CYLINDERS:

(2) STROKES MUST BE THE SAME, RODS ARE CONNECTED

AIR TO AIR INTENSIFIERS TRD STANDARD COMBINATIONS

CYL. #1 BORE	CYL. #1 AREA	CYL. #2 BORE	CYL. #2 AREA	INTENSIFIER RATIO	OUTPUT (PSI) OF CYL. #2 @ INPUT PRESSURE OF:			
					50	80	100	120
3/4	8.296	1 1/2	1.767	4.69	235			
		2	3.142	2.64	132	211	264	
4	12.566	2	3.142	4	200			
		2 1/2	4.909	2.56	128	205	256	
5	19.635	2 1/2	4.909	4	200			
		3/4	8.296	2.37	119	190	237	
6	28.274	3/4	8.296	3.41	171			
		4	12.566	2.25	113	180	225	
8	50.265	4	12.566	4	200			
		5	19.635	2.56	128	205	256	
		6	28.274	1.78	89	143	178	214
10	78.54	5	19.635	4	200			
		6	28.274	2.78	139	223		
12	113.10	6	28.274	4	200			
		8	50.265	2.25	113	180	225	

Note: CYL. #2 output not to exceed 250 PSI.

Intensifier ratio = $\frac{\text{CYL. \#1 AREA}}{\text{CYL. \#2 AREA}}$

AIR TO HYDRAULIC INTENSIFIERS TRD STANDARD COMBINATIONS

CYL. #1 BORE	CYL. #1 AREA	CYL. #2 BORE	CYL. #2 AREA	INTENSIFIER RATIO	OUTPUT (PSI) OF CYL. #2 @ INPUT PRESSURE OF:			
					50	80	100	120
3/4	8.296	1 1/2	1.767	4.69	235	375		
		2	3.142	2.64	132	211	264	317
4	12.566	1 1/2	1.767	7.11	356			
		2	3.142	4	200	320	400	
		2 1/2	4.909	2.56	128	205	256	307
5	19.635	2	3.142	6.25	313			
		2 1/2	4.909	4	200	320	400	
		3/4	8.296	2.37	119	190	237	284
6	28.274	2 1/2	4.909	5.76	288			
		3/4	8.296	3.41	171	273	341	
		4	12.566	2.25	113	180	225	270
8	50.265	3/4	8.296	6.06	303			
		4	12.566	4	200	320	400	
		5	19.635	2.56	128	205	256	307
		6	28.274	1.78	89	143	178	214
10	78.54	4	12.566	6.25	313			
		5	19.635	4	200	320	400	
		6	28.274	2.78	139	223	278	334
12	113.10	5	5.76	5.76	288			
		6	4	4	200	320	400	
		8	2.25	2.25	113	180	225	270

Note: CYL. #2 output not to exceed 400 PSI Non-Shock.


Intensifier ratio = $\frac{\text{CYL. \#1 AREA}}{\text{CYL. \#2 AREA}}$

SERIES: AIR TO AIR INTENSIFIER AIR TO HYDRAULIC INTENSIFIERS

BASIC DIMENSIONS:

(For complete dimensions, refer to 'TA' section of catalog)

AIR TO AIR INTENSIFIERS BASIC DIMENSIONS

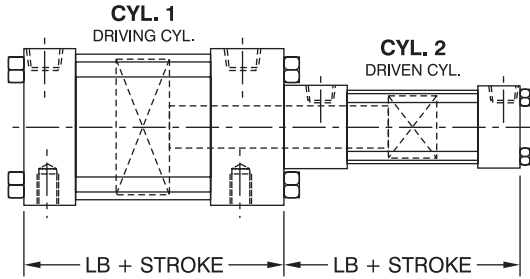

BORE	LB	BORE	LB	BORE	LB
1½	3⅝	4	4¼	10	6⅞
2	3⅞	5	4½	12	6⅞
2½	3¾	6	5		
3¼	4¼	8	5⅝		

CYLINDER VOLUMES (PER INCH OF CYLINDER STROKE)

BORE	AREA	GAL. PER IN. OF STROKE	BORE	AREA	GAL. PER IN. OF STROKE	BORE	AREA	GAL. PER IN. OF STROKE
1½	1.767	.0076	4	12.566	.0054	10	78.54	.340
2	3.142	.0136	5	19.635	.085	12	113.10	.4896
2½	4.909	.0213	6	28.274	.122			
3¼	8.296	.0359	8	50.265	.2175			


Notes: (To Figure Volumes)

Cubic Inches = **AREA X STROKE** Gallons = $\frac{\text{AREA X STROKE}}{231}$

Example:

3¼" BORE X 16" STROKE CYLINDER = 8.296 X 16 = 132.736 CU. IN. OR .575 GALLONS

AIR TO HYDRAULIC INTENSIFIERS BASIC DIMENSIONS

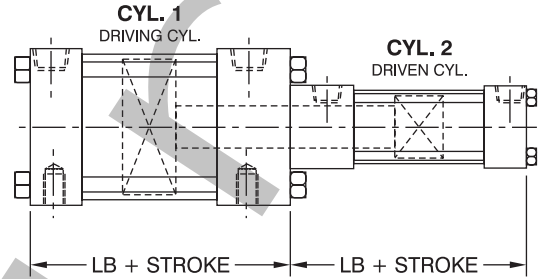

BORE	LB	BORE	LB	BORE	LB
1½	3⅝	4	4¼	10	6⅞
2	3⅞	5	4½	12	6⅞
2½	3¾	6	5		
3¼	4¼	8	5⅝		

CYLINDER VOLUMES (PER INCH OF CYLINDER STROKE)

BORE	AREA	GAL. PER IN. OF STROKE	BORE	AREA	GAL. PER IN. OF STROKE	BORE	AREA	GAL. PER IN. OF STROKE
1½	1.767	.0076	4	12.566	.0054	10	78.54	.340
2	3.142	.0136	5	19.635	.085	12	113.10	.4896
2½	4.909	.0213	6	28.274	.122			
3¼	8.296	.0359	8	50.265	.2175			

Notes: (To Figure Volumes)

Cubic Inches = **AREA X STROKE** Gallons = $\frac{\text{AREA X STROKE}}{231}$


Example:

3¼" BORE X 16" STROKE CYLINDER = 8.296 X 16 = 132.736 CU. IN. OR .575 GALLONS

SCHEMATICS:

AIR TO AIR INTENSIFIER:

SAME STROKE IN EACH CYLINDER.
RODS ARE CONNECTED
ACTUATION SEQUENCE:
PRESSURE TO PORTS 'A' EXTENDS CYLINDER
PRESSURE TO PORTS 'B' RETRACTS CYLINDER

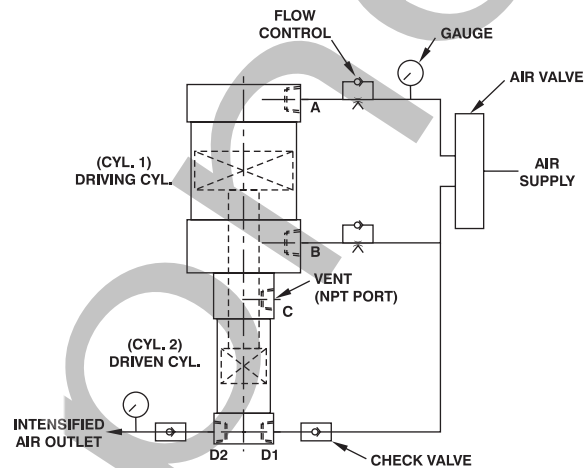


EXAMPLE:

SHOWN IS AN AIR TO AIR INTENSIFIER FOR APPLICATIONS REQUIRING SUPPLY AIR TO BE INTENSIFIED. SUPPLY AIR TO PORT 'A' WILL STROKE CYLINDER AND INTENSIFIED AIR WILL EXIT PORT 'D2'. TO RETURN CYLINDER SUPPLY AIR TO PORT 'B' (2) FLOW CONTROLS USED TO REGULATE CYLINDER SPEED.

AIR TO HYDRAULIC INTENSIFIER:

SAME STROKE IN EACH CYLINDER.
RODS ARE CONNECTED
ACTUATION SEQUENCE:
PRESSURE TO PORTS 'A' EXTENDS CYLINDER
PRESSURE TO PORTS 'B' RETRACTS CYLINDER

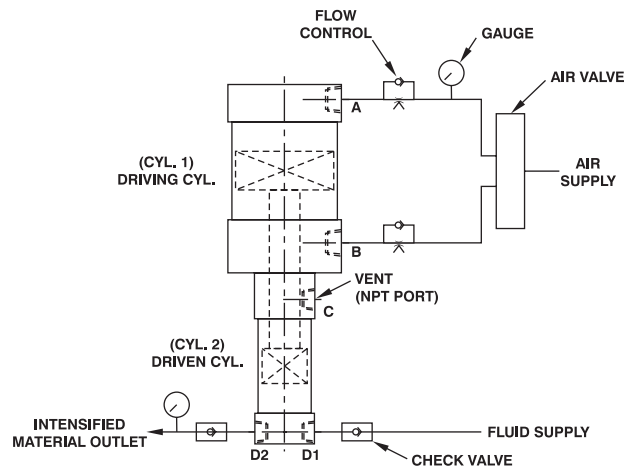

EXAMPLE:

SHOWN IS AN AIR TO HYDRAULIC INTENSIFIER FOR APPLICATIONS REQUIRING FLUID SUPPLY TO BE INTENSIFIED. SUPPLY AIR TO PORT 'A' WILL STROKE CYLINDER AND INTENSIFIED MATERIAL WILL EXIT PORT 'D2'. TO RETURN CYLINDER SUPPLY AIR TO PORT 'B' (2) FLOW CONTROLS USED TO REGULATE CYLINDER SPEED.