


Series CM2W

ø20, ø25
ø32, ø40

Replacement
Procedure is
P.280

Construction


Rubber bumper

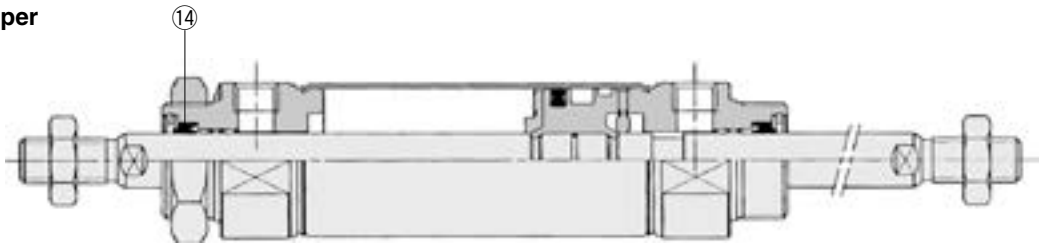


Air-hydro



With air cushion

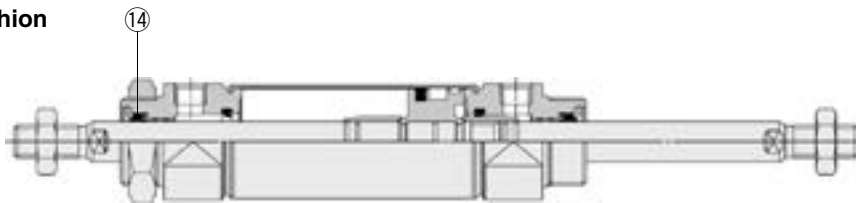

Built-in One-touch fittings

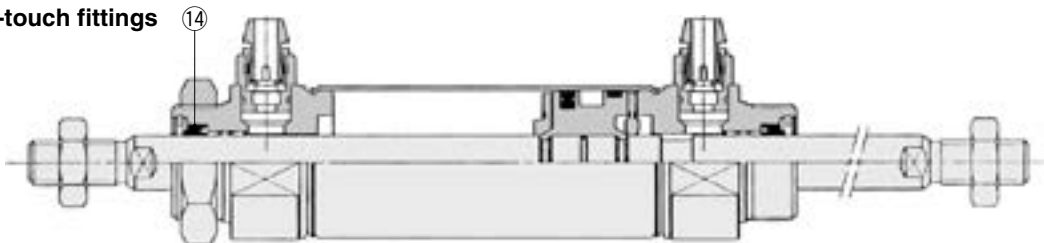

* The numbers are the same as the "Construction" of the Best Pneumatics No.2 Series CM2W.

Seal Kit List

No.	Description	Material	Note
14	Rod seal	NBR	

Replacement Part: Seal

With rubber bumper, with air cushion, built-in One-touch fittings

Bore size (mm)	Kit no.	Contents
20	CM220-PS	
25	CM225-PS	
32	CM232-PS	
40	CM240-PS	

*[BLUE](#) links will lead to purchase pages.

Air-hydro

Bore size (mm)	Kit no.	Contents
20	CM2H20-PS	
25	CM2H25-PS	
32	CM2H32-PS	
40	CM2H40-PS	

* Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

* 2 pcs. are required per cylinder.

Actuators

Modular F.R.L.
Pressure Control Equipment

Air Preparation
Equipment

Industrial Filters

Replacement
Procedure

Actuators

Modular F.R.L.
Pressure Control Equipment

Industrial Filters