

Digital Flow Switches

1 Flow rate setting and monitoring are possible with the digital display.

2 Two types for different applications Integrated and remote type displays

3 Three types of output: Switch, accumulated pulse, and analog outputs.

4 Switching from real-time flow rate to accumulated flow is possible.

5 Two independent flow rate settings are possible.

6 Water resistant construction conforming to IP65



Remote Type

For Air Series **PF2A**



Integrated Type


For Water Series **PF2W**

Flow rate measurement range (l/min)


For Air	For Water	For High Temperature Fluid (Water 90°C)
1 to 10	0.5 to 4	0.5 to 4
5 to 50	2 to 16	2 to 16
10 to 100	5 to 40	5 to 40
20 to 200	10 to 100	
50 to 500		
150 to 3000		
300 to 6000		
600 to 12000		

Application examples



Flow control of N₂ gas to prevent detection camera shimmering and lead frame oxidation



Flow control of cooling water for wafer temperature regulation and high frequency electric power supply



Flow control of pressurized cooling water for welding gun

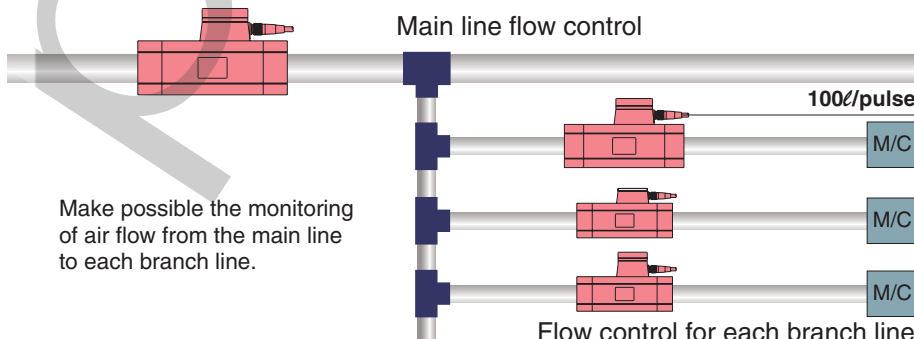

Make possible the monitoring of air flow from the main line to each branch line.


■ The accumulated pulse output function (100l/pulse) enables remote monitoring of accumulated flow.




Series Variation

Series PF2A.PF2W


For Air **Series PF2A** P.2



50ℓ/min
10ℓ/min



500ℓ/min
200ℓ/min
100ℓ/min



12000ℓ/min
6000ℓ/min
3000ℓ/min


Integrated display type	Remote type		Flow rate measurement range ℓ/min	Output specifications			Port size (Rc, NPT, G)						
	Display unit	Sensor unit		Switch output	Analog output	Accumulated pulse output	1/8	1/4	3/8	1/2	1	1 1/2	2
PF2A710	PF2A30□	PF2A510	1 to 10	●	●	●	●	●					
750		550	5 to 50	●	●	●	●	●					
711		511	10 to 100	●	●	●	●	●					
721		31□	521	20 to 200	●	●	●	●	●				
751			551	50 to 500	●	●	●	●	●				
703H			150 to 3000	●	●	●	●	●	●				
706H			300 to 6000	●	●	●	●	●	●	●			
712H			600 to 12000	●	●	●	●	●	●	●	●		

● : Output from integrated display type and remote display unit type
● : Output from remote sensor unit type


For Water **Series PF2W** P.12



16ℓ/min
4ℓ/min



40ℓ/min




100ℓ/min

Integrated display type	Remote type		Flow rate measurement range ℓ/min	Output specifications			Port size (Rc, NPT, G)				
	Display unit	Sensor unit		Switch output	Analog output	Accumulated pulse output	3/8	1/2	3/4	1	
PF2W704	PF2W30□	PF2W504	0.5 to 4	●	●	●	●	●			
720		520	2 to 16	●	●	●	●	●			
740		540	5 to 40	●	●	●	●	●	●		
711	33□	511	10 to 100	●	●	●	●	●	●		

● : Output from integrated display type and remote display unit type
● : Output from remote sensor unit type

For High Temperature Fluid (Water 90°C) **Series PF2W** P.21



Integrated display type	Remote type		Flow rate measurement range ℓ/min	Output specifications			Port size (Rc, NPT, G)		
	Display unit	Sensor unit		Switch output	Analog output	Accumulated pulse output	3/8	1/2	3/4
PF2W704T	PF2W30□	PF2W504T	0.5 to 4	●	●	●	●	●	
720T		520T	2 to 16	●	●	●	●	●	
740T		540T	5 to 40	●	●	●	●	●	●

● : Output from integrated display type and remote display unit type
● : Output from remote sensor unit type

For Air

Digital Flow Switch

Series PF2A

Refer to www.poweraire.com for details of products compatible with overseas standards.



How to Order

Integrated Display Type

PF2A7 10 — [] 01 — 27 [] — []

Flow rate range

10	1 to 10ℓ/min
50	5 to 50ℓ/min
11	10 to 100ℓ/min
21	20 to 200ℓ/min
51	50 to 500ℓ/min

Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Flow rate (ℓ/min)					Applicable models
		10	50	100	200	500	
01	1/8	●					PF2A710/PF2A750
02	1/4	●	●				
03	3/8			●	●		PF2A711/PF2A721
04	1/2					●	PF2A751

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ

Output specification

Symbol	Output specification	Applicable models
27	NPN open collector 2 outputs	PF2A710/PF2A750 PF2A711/PF2A721, PF2A751
67	PNP open collector 2 outputs	PF2A710/PF2A750 PF2A711/PF2A721/PF2A751

Specifications

Model	PF2A710	PF2A750	PF2A711	PF2A721	PF2A751
Measured fluid	Air, Nitrogen				
Flow rate measurement range	0.5 to 10.5ℓ/min	2.5 to 52.5ℓ/min	5 to 105ℓ/min	10 to 210ℓ/min	25 to 525ℓ/min
Set flow rate range	0.5 to 10.5ℓ/min	2.5 to 52.5ℓ/min	5 to 105ℓ/min	10 to 210ℓ/min	25 to 525ℓ/min
Flow rate measuring range	1 to 10ℓ/min	5 to 50ℓ/min	10 to 100ℓ/min	20 to 200ℓ/min	50 to 500ℓ/min
Minimum set unit	0.1ℓ/min	0.5ℓ/min	1ℓ/min	2ℓ/min	5ℓ/min
Accumulated pulse flow rate exchange value (Pulse width: 50ms)	0.1ℓ/pulse	0.5 ℓ/pulse	1ℓ/pulse	2ℓ/pulse	5ℓ/pulse
Display units	Real-time flow rate		ℓ/min, CFM x 10 ⁻²		
	Accumulated flow		ℓ, ft ³ x 10 ⁻¹		
Operating fluid temperature	0 to 50°C				
Linearity	±1% F.S. or less		±5% F.S. or less		
Repeatability	±1% F.S. or less		±2% F.S. or less		
Temperature characteristics	±3% F.S. or less (15 to 35°C, based on 25°C), ±5% F.S. or less (0 to 50°C, based on 25°C)				
Current consumption (No load)	150mA or less		160mA or less		170mA or less
Weight (Note 3)	250g		290g		
Port size (Rc, NPT, G)	1/8, 1/4		3/8		1/2
Detection type	Heater type				
Indicator light	3-digit, 7-segment LED				
Operating pressure range	-50kPa to 0.5MPa		-50kPa to 0.75MPa		
Proof pressure	1.0MPa				
Accumulated flow range	0 to 999999ℓ				
Switch output	NPN open collector	Maximum load current: 80mA; Internal voltage drop: 1V or less (with load current of 80mA) Maximum applied voltage: 30V; Two outputs			
	NPN open collector	Maximum load current: 80mA Internal voltage drop: 1.5V or less (with load current of 80mA); Two outputs			
Accumulated pulse output	NPN or PNP open collector (same as switch output)				
Status LED's	Lights up when output is ON OUT1: Green; OUT2: Red				
Response time	1sec. or less				
Hysteresis	Hysteresis mode: Variable (can be set from 0), Window comparator mode: 3-digit fixed (Note 5)				
Power supply voltage	12 to 24VDC (ripple ±10% or less)				
Resistance	Enclosure	IP65			
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)			
	Withstand voltage	1000VAC for 1 min. between external terminal and case			
	Insulation resistance	50MΩ (500VDC) between external terminal and case			
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration, in X, Y, Z directions for 2 hrs. each (de-energized)			
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each			
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns				

Note 1) For digital flow switch with unit switching function. (Fixed SI unit [(ℓ/min, or ℓ, m³ or m³ x 10³)] will be set for switch type without the unit switching function.)

Note 2) Flow rate display can be switched between the basic condition of 0°C, 101.3kPa and the standard condition (ANR) of 20°C, 101.3kPa, and 65% RH.

Note 3) Without lead wire.

Note 4) Switch output and accumulated pulse output can be selected during initial setting.

Note 5) Window comparator mode — Since hysteresis will reach 3 digits, keep P_1 and P_2 or n_1 and n_2 apart by 7 digits or more. (In case of output OUT2, n_1, 2 to be n_3, 4 and P_1, 2 to be P_3, 4.)

Note 6) The flow switch is conformed to CE mark.

Series PF2A

How to Order

Remote Type
Display Unit

PF2A5 10 — [] 01 [] — []

Flow rate range

10	1 to 10ℓ/min
50	5 to 50ℓ/min
11	10 to 100ℓ/min
21	20 to 200ℓ/min
51	50 to 500ℓ/min

Thread type

Nil	Rc
N	NPT
F	G

Output specification

Nil	Output for display unit
1	Output for display unit + analog output (1 to 5V)
2	Output for display unit + analog output (4 to 20mA)

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Port size

Symbol	Port size	Flow rate (ℓ/min)					Applicable models
		10	50	100	200	500	
01	1/8	●	●				PF2A510/550
02	1/4	●	●				
03	3/8			●	●		PF2A511/521
04	1/2					●	PF2A551



Specifications

Model	PF2A510	PF2A550	PF2A511	PF2A521	PF2A551
Measured fluid	Air, Nitrogen				
Detection type	Heater type				
Flow rate measuring range	1 to 10ℓ/min	5 to 50ℓ/min	10 to 100ℓ/min	20 to 200ℓ/min	50 to 500ℓ/min
Operating pressure range	-50kPa to 0.5MPa		-50kPa to 0.75MPa		
Proof pressure	1.0MPa				
Operating fluid temperature	0 to 50°C				
Linearity ^{Note 1)}	±5% F.S. or less				
Repeatability ^{Note 1)}	±1% F.S. or less				
Temperature characteristics	±2% F.S. or less (15 to 35°C, based on 25°C) ±3% F.S. or less (0 to 50°C, based on 25°C)				
Output specifications ^{Note 2)}	Output for display unit	Analog voltage output (non-linear) output impedance 1kΩ output for display unit PF2A3□□			
	Analog output	Voltage output 1 to 5V within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 100kΩ or more.			
		Current output 4 to 20mA within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 300Ω or less with 12VDC, 600Ω or less with 24VDC			
Power supply voltage	12 to 24VDC (ripple ±10% or less)				
Current consumption (No load)	100mA or less				110mA or less
Resistance	Enclosure	IP65			
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)			
	Withstand voltage	1000VAC for 1 min. between external terminal and case			
	Insulation resistance	50MΩ (500VDC) between external terminal and case			
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration			
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each			
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns				
Weight ^{Note 3)}	200g		240g		
Port size (Rc, NPT, G)	1/8, 1/4		3/8		1/2

Note 1) The system accuracy when combined with PF2A3□□.


Note 2) Output system can be selected during initial setting.

Note 3) Without lead wire. (Add 20g for the types of analog output whether voltage or current output selected.)

Note 4) Flow rate unit measured under the following conditions: 0°C and 101.3kPa.

Note 5) The sensor units conformed to CE mark.

How to Order



Remote Type Display Unit

PF2A3 0 0 - A - []

Flow rate range

Symbol	Flow rate range	Type for sensor unit
0	1 to 10ℓ/min	PF2A510
	5 to 50ℓ/min	PF2A550
1	10 to 100ℓ/min	PF2A511
	20 to 200ℓ/min	PF2A521
	50 to 500ℓ/min	PF2A551

Mounting

A	Panel mounting
---	----------------

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ

Output specification

Symbol	Output specification	Applicable models
0	NPN open collector 2 outputs	PF2A300, 310
1	PNP open collector 2 outputs	PF2A301, 311

Specifications

Model	PF2A300/301			PF2A310/311	
Flow rate measurement range ^{Note 1)}	0.5 to 10.5ℓ/min	2.5 to 52.5ℓ/min	5 to 105ℓ/min	10 to 210ℓ/min	25 to 525ℓ/min
Set flow rate range ^{Note 1)}	0.5 to 10.5ℓ/min	2.5 to 52.5ℓ/min	5 to 105ℓ/min	10 to 210ℓ/min	25 to 525ℓ/min
Minimum set unit ^{Note 1)}	0.1ℓ/min	0.5ℓ/min	1ℓ/min	2ℓ/min	5ℓ/min
Accumulated pulse flow rate exchange value (Pulse width: 50ms) ^{Note 1)}	0.1ℓ/pulse	0.5ℓ/pulse	1ℓ/pulse	2ℓ/pulse	5ℓ/pulse
^{Note 2, 3)} Display units	Real-time flow rate	ℓ/min, CFM x 10 ⁻²		ℓ/min, CFM x 10 ⁻¹	
	Accumulated flow	ℓ, ft ³ x 10 ⁻¹			
Accumulated flow range	0 to 999999ℓ				
Linearity ^{Note 4)}	±5% F.S. or less				
Repeatability ^{Note 4)}	±1% F.S. or less				
Temperature characteristics	±1% F.S. or less (15 to 35°C based on 25°C) ±2% F.S. or less (0 to 50°C based on 25°C)				
Current consumption	50mA or less		60mA or less		
Weight	45g				
^{Note 5)} Output specifications	Switch output	NPN open collector (PF2A300, PF2A310)		Maximum load current: 80mA Internal voltage drop: 1V or less (with load current of 80mA) Maximum applied voltage: 30V 2 outputs	
		PNP open collector (PF2A301, PF2A311)		Maximum load current: 80mA Internal voltage drop: 1.5V or less (with load current of 80mA) 2 outputs	
	Accumulated pulse output	NPN or PNP open collector (same as switch output)			
Indicator lights	3-digit, 7-segment LED				
Status LED's	Lights up when output is ON OUT1: Green; OUT2: Red				
Power supply voltage	12 to 24VDC (ripple ±10% or less)				
Response time	1 sec. or less				
Hysteresis	Hysteresis mode: Variable (can be set from 0), Window comparator mode: Fixed (3 digits) ^{Note 6)}				
Resistance	Enclosure	IP40			
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)			
	Withstand voltage	1000VAC for 1 min. between external terminal and case			
	Insulation resistance	50MΩ (500VDC) between external terminal and case			
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration, in X, Y, Z directions for 2 hrs. each			
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each			
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns				

Note 1) The flow rate measurement range can be modified depending on the setting.

Note 2) For digital flow switch with unit switching function. (Fixed SI unit [ℓ/min or ℓ] will be set for switch types without the unit switching function.)

Note 3) Flow rate display can be switched between the basic condition of 0°C, 101.3kPa and the standard condition (ANR) of 20°C, 101.3kPa, and 65% RH.

Note 4) The system accuracy when combined with PF2A5□□.

Note 5) Switch output and accumulated pulse output can be selected during initial setting.


Note 6) Window comparator mode — Since hysteresis will reach 3 digits, keep P_1 and P_2 or n_1 and n_2 apart by 7 digits or more. (In case of output OUT2, n_1, 2 to be n_3, 4 and P_1, 2 to be P_3, 4.)

Note 7) The display unit is conformed to CE mark.


Series PF2A

Flow Characteristics (Pressure Loss)


PF2A710,510

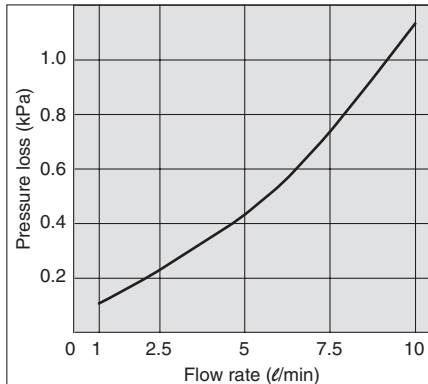


PF2A750,550

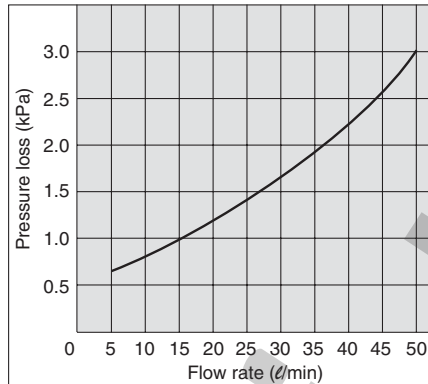


PF2A711,511

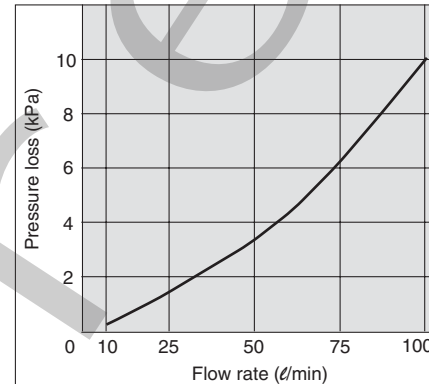

PF2A721,521

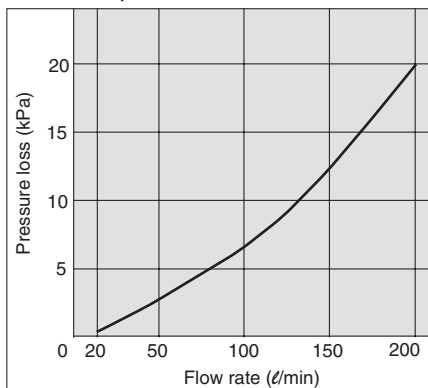


PF2A751,551

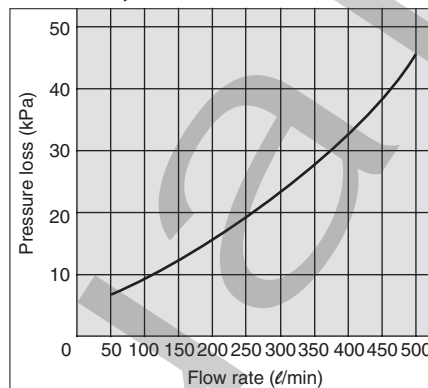

Sensor Unit Construction


PF2A710/750
PF2A510/550

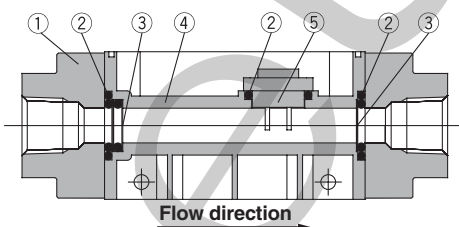

Parts list

No.	Description	Material
1	Attachment	ADC
2	Seal	NBR
3	Mesh	Stainless steel
4	Body	PBT
5	Sensor	PBT

PF2A711/721/751
PF2A511/521/551

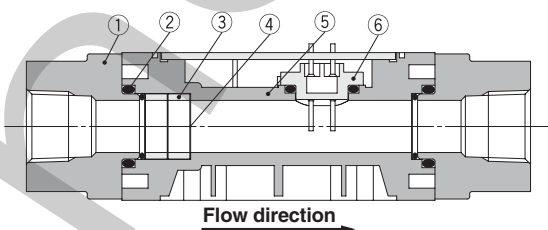

Parts list

No.	Description	Material
1	Attachment	ADC
2	Seal	NBR
3	Spacer	PBT
4	Mesh	Stainless steel
5	Body	PBT
6	Sensor	PBT

Operating Unit Descriptions

RESET Buttons

Press the ▲ and ▼ buttons simultaneously to activate the RESET function. This clears the unit when an abnormality occurs and resets the accumulated flow display to "0".

Output (OUT1) Indicator: Green

Lights up when OUT1 is ON. Blinks when an overcurrent error occurs on OUT1.

Output (OUT2) Indicator: Red

Lights up when OUT2 is ON. Blinks when an overcurrent error occurs on OUT2.

LED Display

Displays the real-time flow rate, accumulated flow, and set value. The ● mark blinks when the accumulated flow is being measured.

UP Button (▲ Button)


Use this button to increase a set value.

SET Button (● Button)

Use this button to change a set value or any of the modes.

DOWN Button (▼ Button)

Use this button to decrease a set value.




Connectors

Connectors shown below are applicable (female contact). Contact each manufacturer for details.

Connector size	Number of pins	Manufacturer	Applicable series
M12	4	Correns Corporation	VA-4D
		OMRON Corporation	XS2
		Yamatake Corporation	PA5-4I
		Hirose Electric Co., Ltd.	HR24
		DDK Ltd.	CM01-8DP4S


Dimensions: Integrated Display Type for Air

PF2A710, 750

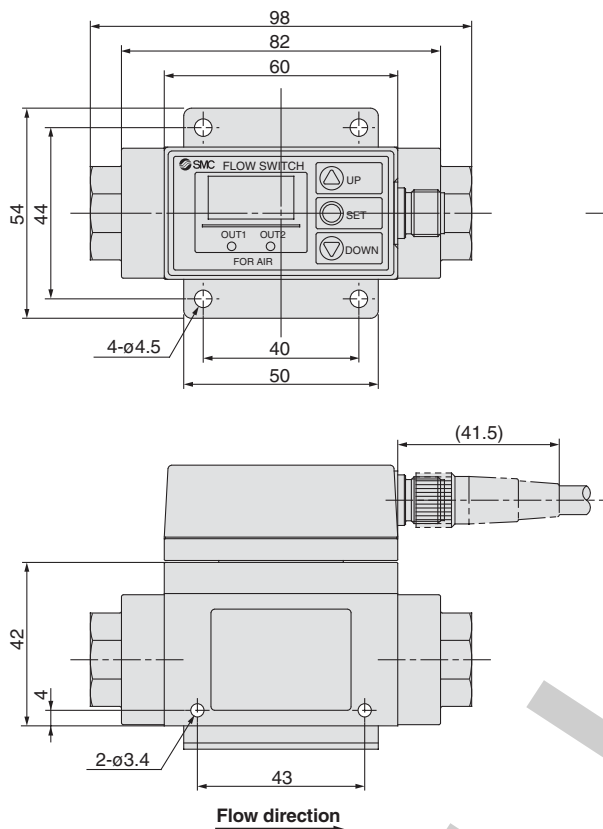


Internal circuits and wiring examples

① to ④ are terminal numbers.

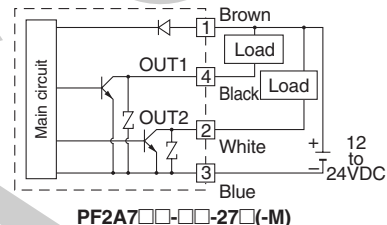


PF2A7□□-□□-27□(-M)

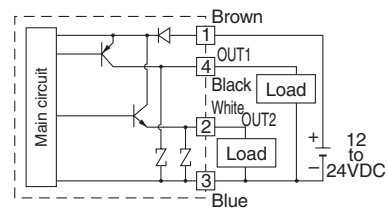


PF2A7□□-□□-67□(-M)

PF2A711, 721, 751

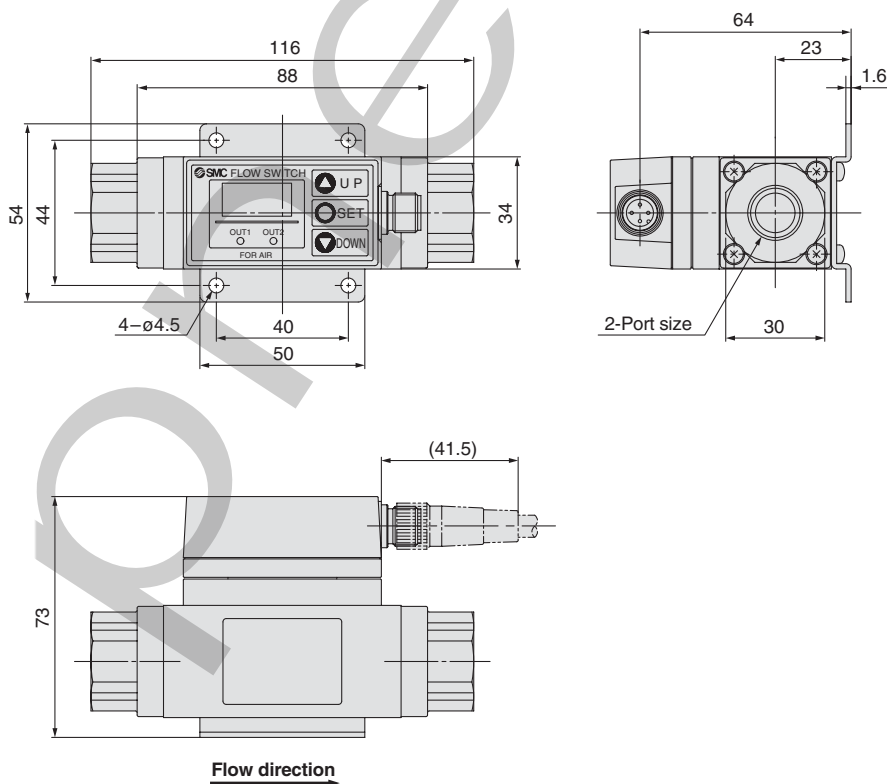

Connector pin numbers






Pin no.	Pin description
1	DC(+)
2	OUT2
3	DC(-)
4	OUT1

Series PF2A

[1] to [8] are terminal numbers.




Dimensions: Remote Type Sensor Unit for Air

PF2A510, 550

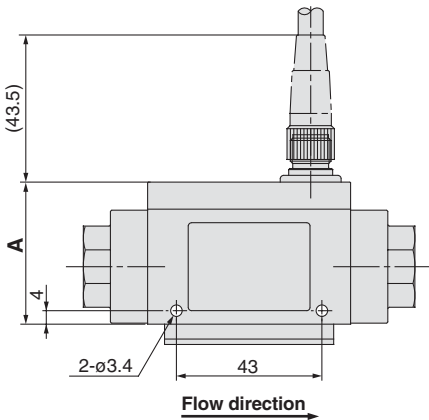

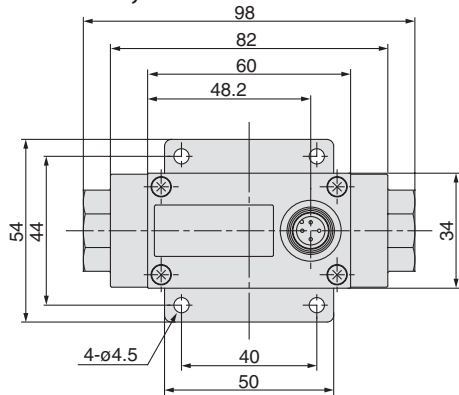


Output specification	(mm)	
	A	B
Pulse output only	42	62
Pulse output + Analog output	52	72

Internal circuits and wiring examples

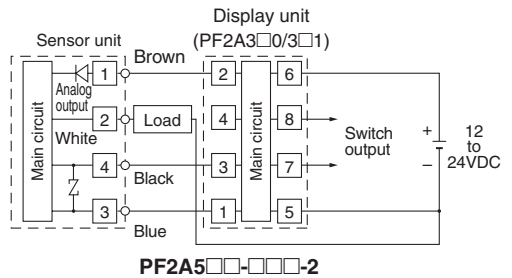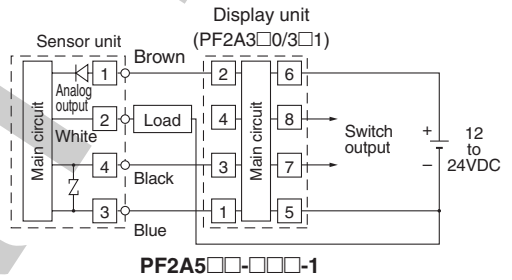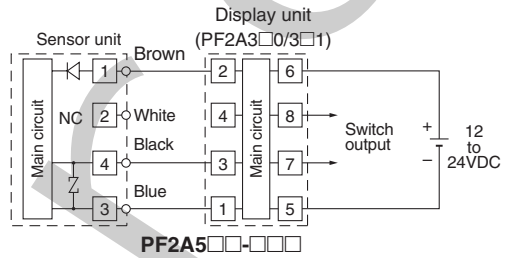


PF2A511, 521, 551

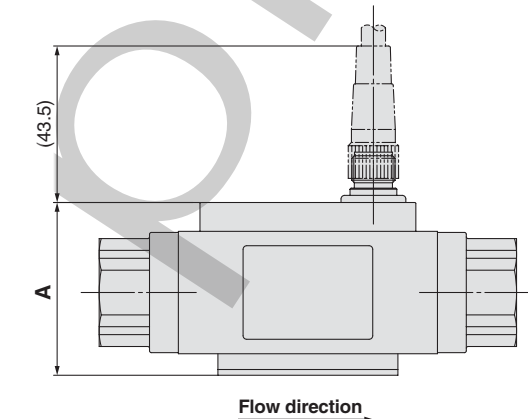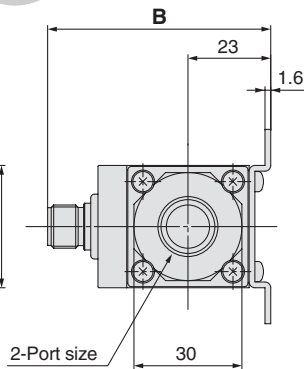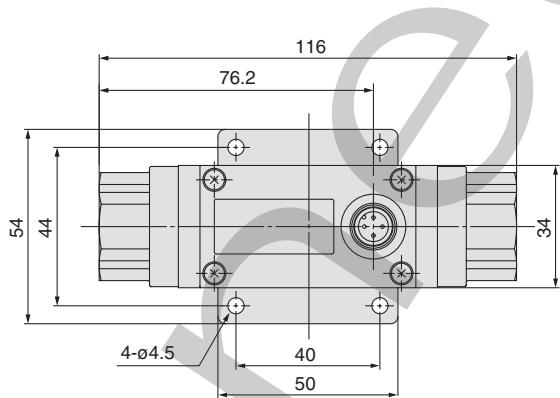


Output specification	(mm)	
	A	B
Pulse output only	48	62
Pulse output + Analog output	58	72

Wiring

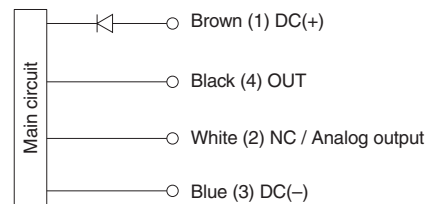

* Use this sensor by connecting to P/A remote type display unit Series PF2A3□□.



Connector pin numbers



Pin no.	Pin description
1	DC(+)
2	NC/Analog output
3	DC(-)
4	OUT



Dimensions: Remote Type Display Unit for Air

PF2A3□□-A
Panel mounting type

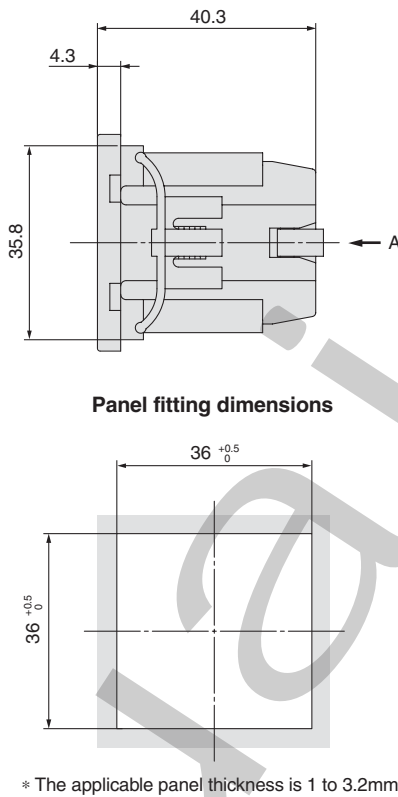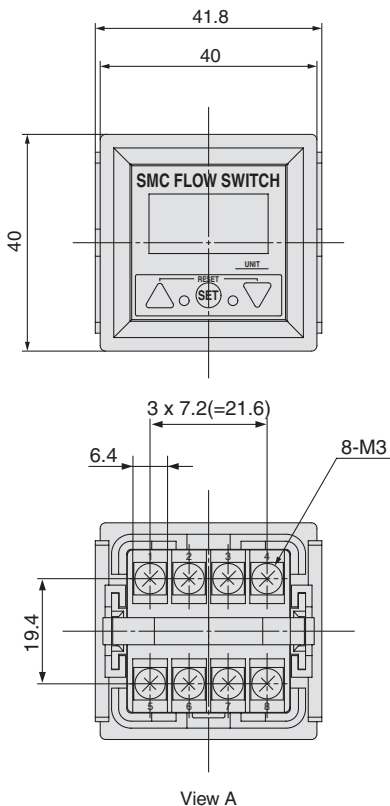


Internal circuits and wiring examples

① to ⑧ are terminal numbers.

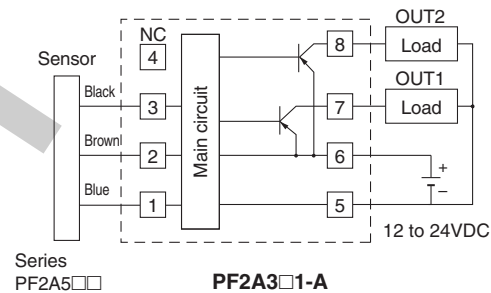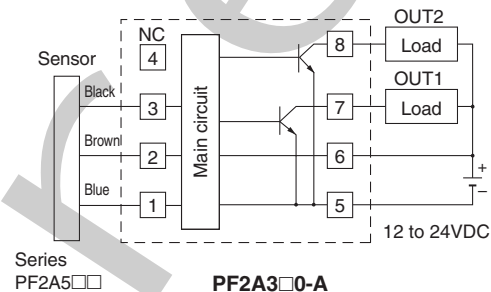


* Do not connect the white wire of the sensor to ③.


Terminal block number

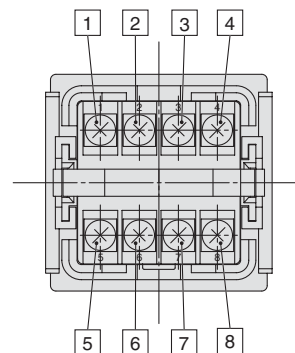

Analog output 1 to 5VDC

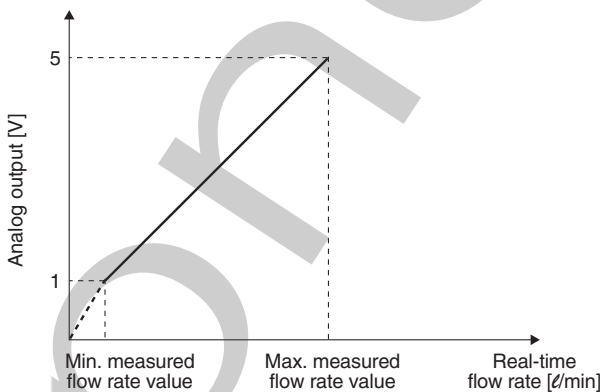

4 to 20mAADC

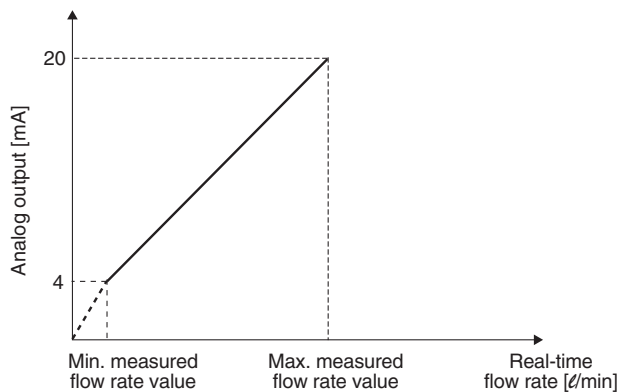

Part nos.	Basic condition		Standard condition	
	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2A510-□-1	1	10	1.1	10.7
PF2A550-□-1	5	50	5.4	53.5
PF2A511-□-1	10	100	11	107
PF2A521-□-1	20	200	21	214
PF2A551-□-1	50	500	54	535

Part nos.	Basic condition		Standard condition	
	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2A510-□-2	1	10	1.1	10.7
PF2A550-□-2	5	50	5.4	53.5
PF2A511-□-2	10	100	11	107
PF2A521-□-2	20	200	21	214
PF2A551-□-2	50	500	54	535

For Air

Digital Flow Switch/High Flow Rate Type

Series PF2A

Refer to www.poweraire.com for details of products compatible with overseas standards.



How to Order

Integrated Display Type PF2A7 [] H [] [] [] [] []

Flow rate range

03	150 to 3000ℓ/min
06	300 to 6000ℓ/min
12	600 to 12000ℓ/min

High flow rate type

Port specification

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Flow rate (ℓ/min)			Applicable model
		3000	6000	12000	
10	1	●			PF2A703H
14	1½		●		PF2A706H
20	2			●	PF2A712H

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ, m³, m³ x 10³

Output specification

28	NPN open collector 1 output + Analog output (1 to 5V)
29	NPN open collector 1 output + Analog output (4 to 20mA)
68	PNP open collector 1 output + Analog output (1 to 5V)
69	PNP open collector 1 output + Analog output (4 to 20mA)

* Switching of switch output and accumulated pulse output is possible with NPN or PNP open collector outputs.

Specifications

Model	PF2A703H	PF2A706H	PF2A712H
Measured fluid	Dry air		
Detection type	Heater type		
Flow rate measuring range Note 1)	150 to 3000ℓ/min	300 to 6000ℓ/min	600 to 12000ℓ/min
Minimum setting unit Note 1)	5ℓ/min	10ℓ/min	
Note 2) Real-time flow rate	ℓ/min, CFM		
Display units Accumulated flow	ℓ, m³, m³ x 10³, ft³, ft³ x 10³, ft³ x 10⁶		
Operating pressure range	0.1 to 1.5MPa		
Proof pressure	2.25MPa		
Pressure loss	20kPa (at maximum flow rate)		
Accumulated flow range	0 to 9,999,999,999ℓ		
Linearity Note 3)	±1.5% F.S. or less (0.7MPa, at 20°C)		
Repeatability	±1.0% F.S. or less (0.7MPa, at 20°C), ±3.0% of F.S. or less in case of analog output		
Pressure characteristics	±1.5% F.S. or less (0.1 to 1.5MPa, based on 0.7MPa)		
Temperature characteristics	±2.0% F.S. or less (0 to 50°C, based on 25°C)		
Output specifications	Switch output Note 4)	NPN open collector Max. load current: 80mA; Max. applied voltage: 30V; Internal voltage drop: 1V or less (with load current of 80mA) PNP open collector Max. load current: 80mA; Internal voltage drop: 1.5V or less (with load current of 80mA)	
	Accumulated pulse output Note 4)	NPN or PNP open collector	Flow rate per pulse: 100ℓ/pulse, 10.0ft³/pulse Pulse width: 50msec
	Analog output Note 5)	Output voltage: 1 to 5V; Load impedance: 100kΩ or more Output current: 4 to 20mA; Load impedance: 250Ω or less	
Response time	1 sec. or less		
Hysteresis	Hysteresis mode: Variable (can be set from 0); Window comparator mode: (can be set from 0 to 3% F.S.)		
Power supply voltage	24VDC (ripple ±10% or less)		
Current consumption	150mA or less		
Resistance	Enclosure	IP65	
	Operating temperature range	0 to 50°C (with no condensation)	
	Withstand voltage	1000VAC for 1 min. between external terminal and case	
	Insulation resistance	50MΩ (500VDC) between external terminal and case	
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s² acceleration, in X, Y, Z directions for 2 hrs. each	
	Impact resistance	490m/s² in X, Y, Z directions 3 times each	
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns		
Weight	1.1kg (without lead wire)	1.3kg (without lead wire)	2.0kg (without lead wire)
Port size (Rc, NPT, G)	1	1½	2

Note 1) Flow rate display can be switched between the basic condition of 0°C, 101.3kPa and the standard condition (ANR) of 20°C, 101.3kPa, and 65% RH.

Note 2) For digital flow switch with unit switching function. (Fixed SI unit [(ℓ/min, or ℓ, m³ or m³ x 10³)]) will be set for switch type without the unit switching function.)


Note 3) The high flow rate type is CE marked; however, the linearity with applied noise is ±5% F.S. or less.

Note 4) Switch output and accumulated pulse output selections are made using the button controls.


Note 5) The analog output operates only for real-time flow rate, and does not operate for accumulated flow.

Flow Characteristics (Pressure Loss)


PF2A703H

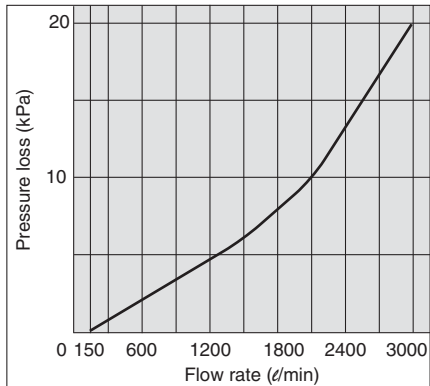


PF2A706H

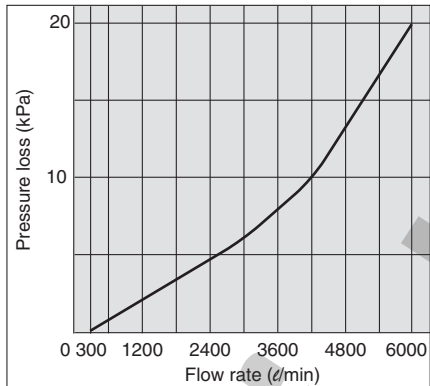

PF2A712H

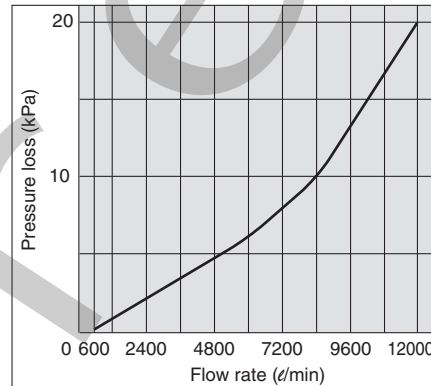

Construction

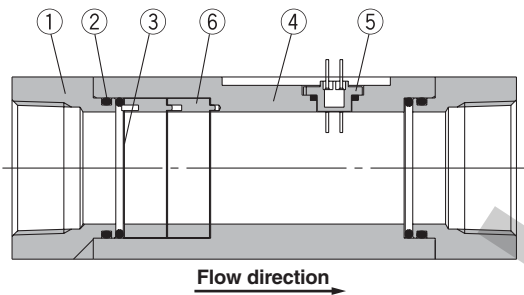

Parts list

No.	Description	Material	Note
1	Attachment	Aluminum alloy	Anodized
2	Seal	HNBR	—
3	Mesh	Stainless steel	—
4	Body	Aluminum alloy	Anodized
5	Sensor	PPS	—
6	Spacer	PBT	—

Operating Unit Descriptions

RESET Buttons

Press the UP and DOWN buttons simultaneously to activate the RESET function. This clears the unit when an abnormality occurs and resets the accumulated flow display to "0".

Unit Display

Displays the selected unit. Fixed SI unit (l/min, or l, m³ or m³ x 10³) will be set for switches without the unit switching function.

Output (OUT1) Indicator

Lights up when OUT1 is ON. Blinks when an overcurrent error occurs on OUT1.

UP Button (▲ Button)

Use this button to increase a set value.

SET Button (● Button)


Use this button to select a function.

Flow Rate Display

Displays the real-time flow rate, accumulated flow, and set value.

Flow Rate Confirmation Indicator

The blinking intervals change depending on the flow rate value.



DOWN Button (▼ Button)

Use this button to decrease a set value.

MODE Button (○ Button)

Use this button to change a function.

Connectors




Connectors shown below are applicable (female contact). Contact each manufacturer for details.

Connector size	Number of pins	Manufacturer	Applicable series
M12	4	Correns Corporation	VA-4D
		OMRON Corporation	XS2
		Yamatake Corporation	PA5-4I
		Hirose Electric Co., Ltd.	HR24
		DDK Ltd.	CM01-8DP4S

Series PF2A

Dimensions

PF2A703H, 706H, 712H

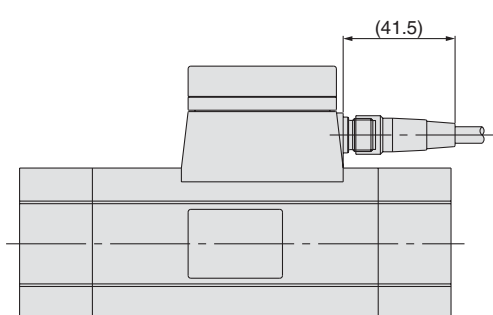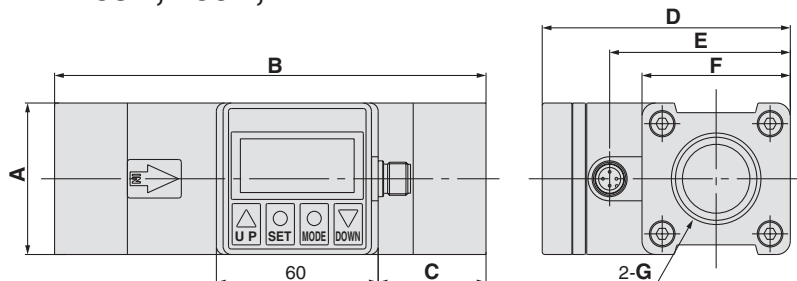


Connector pin numbers

Pin no.	Pin description
1	DC(+)
2	Analog output
3	DC(-)
4	OUT1


Model	A	B	C	D	E	F	G	H	I	J
PF2A703H	55	160	40	92	67	55	Rc 1, NPT 1, G 1	36	M5 x 0.8	8
PF2A706H	65	180	45	104	79	65	Rc 1 1/2, NPT 1 1/2, G 1 1/2	46	M6 x 1	9
PF2A712H	75	220	55	114	89	75	Rc 2, NPT 2, G 2	56	M6 x 1	9

Analog output 1 to 5VDC

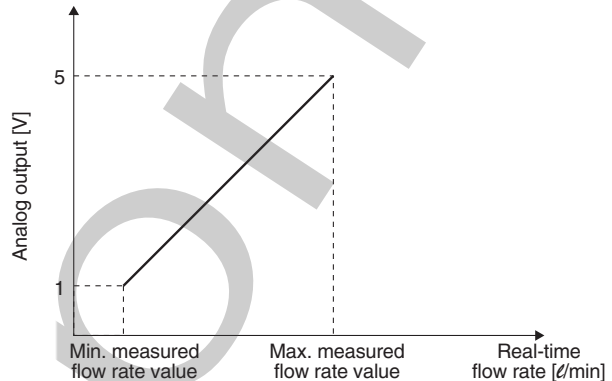

Part nos.	Minimum measured flow rate value [ℓ/min]	Maximum measured flow rate value [ℓ/min]
PF2A703H-□-28 PF2A703H-□-68	150	3000
PF2A706H-□-28 PF2A706H-□-68	300	6000
PF2A712H-□-28 PF2A712H-□-68	600	12000



4 to 20mADC

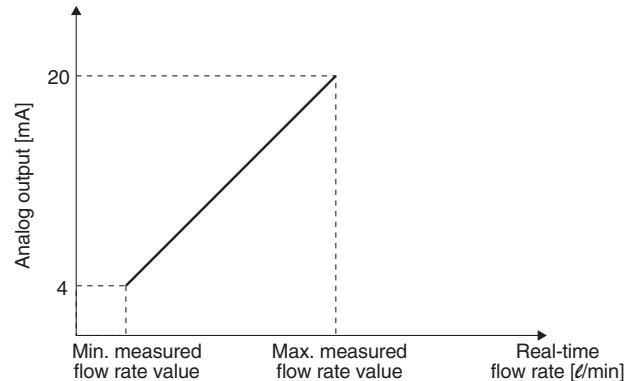



Part nos.	Minimum measured flow rate value [ℓ/min]	Maximum measured flow rate value [ℓ/min]
PF2A703H-□-29 PF2A703H-□-69	150	3000
PF2A706H-□-29 PF2A706H-□-69	300	6000
PF2A712H-□-29 PF2A712H-□-69	600	12000

Internal circuits and wiring examples

① to ④ are terminal numbers.

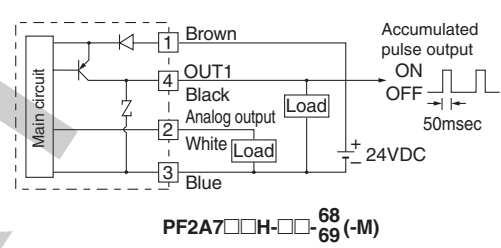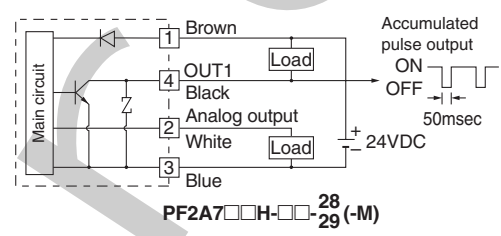

Accumulated pulse output wiring examples

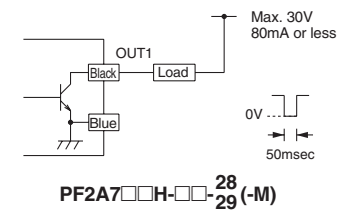

For Water

Digital Flow Switch

Series PF2W

Refer to www.poweraire.com for details of products compatible with overseas standards.



How to Order

Integrated Display Type

PF2W7 20 — [] 03 — 27 [] []

Flow rate range

04	0.5 to 4ℓ/min
20	2 to 16ℓ/min
40	5 to 40ℓ/min
11	10 to 100ℓ/min

Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Flow rate (ℓ/min)			Applicable models	
		4	16	40		100
03	3/8	●	●			PF2W704, PF2W720
04	1/2		●	●		PF2W720, PF2W740
06	3/4			●	●	PF2W740, PF2W711
10	1				●	PF2W711

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Output specification

27	NPN open collector 2 outputs
67	PNP open collector 2 outputs

Specifications

Model	PF2W704	PF2W720	PF2W740	PF2W711
Measured fluid	Water			
Flow rate measurement range	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min	7 to 110ℓ/min
Set flow rate range	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min	7 to 110ℓ/min
Flow rate measuring range	0.5 to 4ℓ/min	2 to 16ℓ/min	5 to 40ℓ/min	10 to 100ℓ/min
Minimum set unit	0.05ℓ/min	0.1ℓ/min	0.5ℓ/min	1ℓ/min
Accumulated pulse flow rate exchange value (Pulse width: 50ms)	0.05ℓ/pulse	0.1ℓ/pulse	0.5ℓ/pulse	1ℓ/pulse
Linearity	±5% F.S. or less			±3% F.S. or less
Repeatability	±3% F.S. or less			±2% F.S. or less
Temperature characteristics (Note 1)	±5% F.S. or less (0° to 50°C, based on 25°C)			
Current consumption (No load)	70mA or less			80mA or less
Weight (Note 2)	460g	520g	700g	1150g
Port size (Rc, NPT, G)	3/8	3/8, 1/2	1/2, 3/4	3/4, 1
Detection type	Karman vortex			
Indicator light	3-digit, 7-segment LED			
Display units (Note 3)	Real-time flow rate	ℓ/min, gal(US)/min		
	Accumulated flow	ℓ, gal(US)		
Operating pressure range	0 to 1MPa			
Proof pressure	1.5MPa			
Accumulated flow range	0 to 999999ℓ			
Ambient temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)			
Output specifications (Note 4)	Switch output	NPN open collector Maximum load current: 80mA; Internal voltage drop: 1V or less (with load current of 80mA) Maximum applied voltage: 30V; 2 outputs		
	Accumulated pulse output	PNP open collector Maximum load current: 80mA Internal voltage drop: 1.5V or less (with load current of 80mA); 2 outputs NPN or PNP open collector (same as switch output)		
Status LED's	Lights up when output is ON, OUT1: Green; OUT2: Red			
Response time	1 sec. or less			
Hysteresis	Hysteresis mode: Variable (can be set from 0), Window comparator mode: 3-digit fixed (Note 5)			
Power supply voltage	12 to 24VDC (ripple ±10% or less)			
Resistance	Enclosure	IP65		
	Operating temperature range	0 to 50°C		
	Withstand voltage	1000VAC for 1 min. between external terminal and case		
	Insulation resistance	50MΩ (500VDC) between external terminal and case		
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration in X, Y, Z directions for 2 hrs. each		
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each		
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns			

Note 1) In the case of PF2W711, ±3% of F.S. or less (15°C to 35°C, based on 25°C). Note 2) Without lead wire.

Note 3) For digital flow switch with unit switching function. (Fixed SI unit [ℓ/min or ℓ] will be set for switch type without the unit switching function.)

Note 4) Switch output and accumulated pulse output can be selected during initial setting.

Note 5) Window comparator mode — Since hysteresis will reach 3 digits, keep P_1 and P_2 or n_1 and n_2 apart by 7 digits or more. The minimum setting unit is 1 digit. (refer to the table above).

(In case of output OUT2, n_1, 2 to be n_3, 4 and P_1, 2 to be P_3, 4.)

Note 6) The flow switch is conformed to CE mark.

Series PF2W

How to Order

Remote Type
Sensor Unit

PF2W5 20 — 03 —

Flow rate range

04	0.5 to 4ℓ/min
20	2 to 16ℓ/min
40	5 to 40ℓ/min
11	10 to 100ℓ/min

Thread type

Nil	Rc
N	NPT
F	G

Output specification

Nil	Output for display unit (sensor output) only
1	Output for display unit + Analog output (1 to 5V)
2	Output for display unit + Analog output (4 to 20mA)

Wiring specification

Nil	Lead wire with connector 3m
N	Without lead wire

Port size

Symbol	Port size	Flow rate (ℓ/min)				Applicable models
		4	16	40	100	
03	3/8	●	●			PF2W504, PF2W520
04	1/2		●	●		PF2W520, PF2W540
06	3/4			●	●	PF2W540, PF2W511
10	1				●	PF2W511



Specifications

Model	PF2W504	PF2W520	PF2W540	PF2W511
Measured fluid	Water			
Detection type	Karman vortex			
Flow rate measuring range	0.5 to 4ℓ/min	2 to 16ℓ/min	5 to 40ℓ/min	10 to 100ℓ/min
Operating pressure range	0 to 1MPa			
Withstand pressure	1.5MPa			
Operating fluid temperature	0 to 50°C			0 to 50°C
Linearity ^{Note 1)}	±5% F.S. or less			±3% F.S. or less
Repeatability ^{Note 1)}	±2% F.S. or less			±1% F.S. or less
Temperature characteristics	±2% F.S. or less (15 to 35°C based on 25°C), ±3% F.S. or less (0 to 50°C based on 25°C)			
Output specifications ^{Note 2)}	Output for display unit	Pulse output, N channel, open drain, output for display unit PF2W3□□. (Specifications: Maximum load current of 10mA; Maximum applied voltage of 30V)		
	Analog output	Voltage output 1 to 5V within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 100kΩ or more.		
		Current output 4 to 20mA within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 300Ω or less with 12VDC, 600Ω or less with 24VDC		
Power supply voltage	12 to 24VDC (ripple ±10% or less)			
Current consumption (No load)	20mA or less			
Resistance	Enclosure	IP65		
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)		
	Withstand voltage	1000VAC for 1 min. between external terminal and case		
	Insulation resistance	50MΩ (500VDC) between external terminal and case		
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration in X, Y, Z directions for 2 hrs. each		4.9m/s ²
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each		
Weight ^{Note 3)}	410g	470g	650g	1,100g
Port size (Rc, NPT, G)	3/8	3/8, 1/2	1/2, 3/4	3/4, 1

Note 1) The system accuracy when combined with PF2W3□□.

Note 2) Output system can be selected during initial setting.

Note 3) Without lead wire. (Add 20g for the types of analog output whether voltage or current output selected.)

Note 4) The sensor units conformed to CE mark.



How to Order

Remote Type Display Unit

PF2W3 0 0 - A - []

Flow rate range

Symbol	Flow rate range	Type for sensor unit
0	0.5 to 4ℓ/min	PF2W504
	2 to 16ℓ/min	PF2W520
	5 to 40ℓ/min	PF2W540
3	10 to 100ℓ/min	PF2W511

Output specification

0	NPN open collector 2 outputs
1	PNP open collector 2 outputs

Mounting

A	Panel mounting
---	----------------

Panel mount adapter part no.

Description	Panel adapter B
Part No.	ZS-22-02

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ

Specifications

Model		PF2W300/301		PF2W330/331
Flow rate measurement range (Note 1)	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min	7 to 110ℓ/min
Set flow rate range (Note 1)	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min	7 to 110ℓ/min
Minimum setting unit (Note 1)	0.05ℓ/min	0.1ℓ/min	0.5ℓ/min	1ℓ/min
Accumulated pulse flow rate exchange value (Pulse width: 50ms) (Note 1)	0.05ℓ/pulse	0.1ℓ/pulse	0.5ℓ/pulse	1ℓ/pulse
Note 2) Display units	Real-time flow rate	ℓ/min, gal(US)/min		
	Accumulated flow	ℓ, gal(US)		
Accumulated flow range	0 to 99999ℓ			
Linearity (Note 3)	±5% F.S. or less		±3% F.S. or less	
Repeatability (Note 3)	±3% F.S. or less		±1% F.S. or less	
Temperature characteristics	±2% F.S. or less (0 to 50°C, based on 25°C), ±1% F.S. or less (15 to 35°C, based on 25°C)			
Current consumption (No load)	50mA or less		60mA or less	
Weight	45g			
Note 4) Output specifications	Switch output	NPN open collector (PF2W300, PF2W330)	Maximum load current: 80mA Internal voltage drop: 1V or less (with load current of 80mA) Maximum applied voltage: 30V 2 outputs	
		PNP open collector (PF2W301, PF2W331)	Maximum load current: 80mA Internal voltage drop: 1.5V or less (with load current of 80mA) 2 outputs	
	Accumulated pulse output	NPN or PNP open collector (same as switch output)		
Resistance	Enclosure	IP40		
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)		
	Withstand voltage	1000VAC for 1 min. between external terminal and case		
	Insulation resistance	50MΩ (500VDC) between external terminal and case		
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration in X, Y, Z directions for 2 hrs. each		
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each		
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns			
Indicator lights	3-digit, 7-segment LED			
Status LED's	Lights up when output is ON, OUT1: Green; OUT2: Red			
Power supply voltage	12 to 24VDC (ripple ±10% or less)			
Response time	1sec. or less			
Hysteresis	Hysteresis mode: Variable (can be set from 0) Window comparator mode: 3-digit fixed (Note 5)			

Note 1) Values vary depending on each set flow rate range.

Note 2) For digital flow switch with unit switching function. (Fixed SI unit [ℓ/min or ℓ] will be set for switch types without the unit switching function.)

Note 3) The system accuracy when combined with PF2W5.

Note 4) Switch output and accumulated pulse output can be selected during initial setting.


Note 5) Window comparator mode — Since hysteresis (H) will reach 3 digits, keep P_1 and P_2 or n_1 and n_2 apart by 7 digits or more. (In case of output OUT2, n_1, 2 to be n_3, 4 and P_1, 2 to be P_3, 4.)

Note 6) The display unit is conformed to CE mark.


Series PF2W

Flow Characteristics (Pressure Loss)


PF2W704, PF2W504

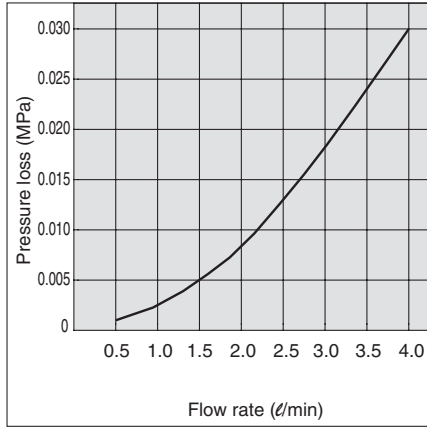


PF2W720, PF2W520

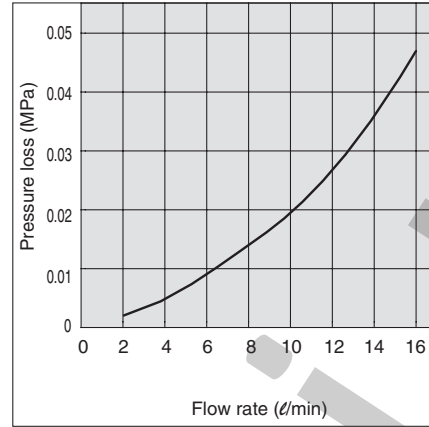


PF2W740, PF2W540

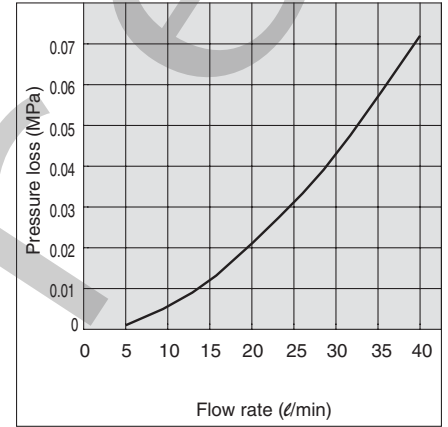

PF2W711, PF2W511

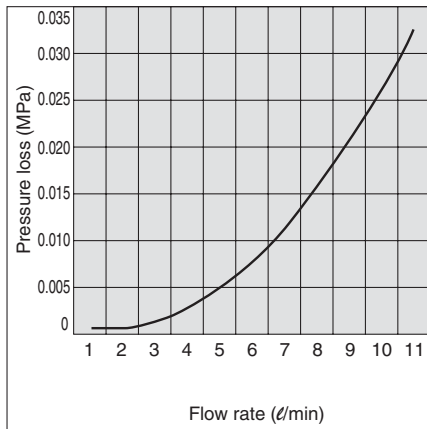

Sensor Unit Construction

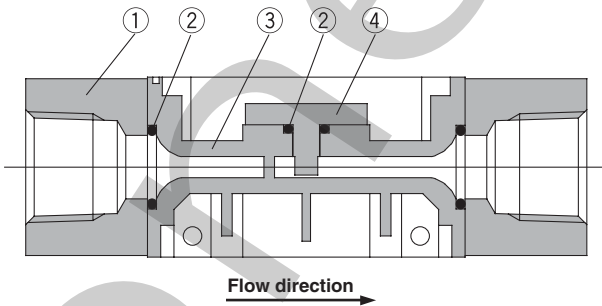

Parts list


No.	Description	Material
1	Attachment	SUS
2	Seal	NBR
3	Body	PPS
4	Sensor	PPS




Connectors and operating unit descriptions are the same as series PF2A for air. Refer to page 5.

Dimensions: Integrated Display Type for Water


PF2W704, PF2W720

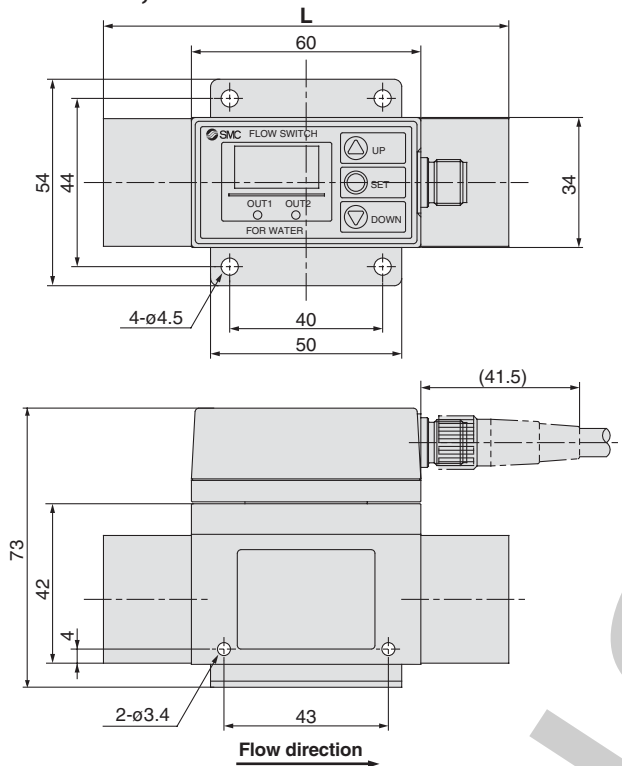


Model	L Dimension
PF2W704	100
PF2W720	106

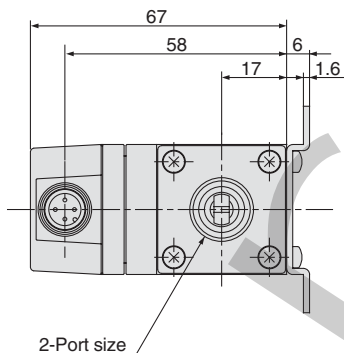

Internal circuits and wiring examples
① to ④ are terminal numbers.

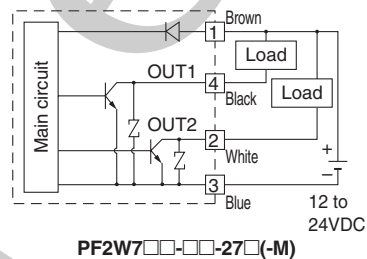


PF2W704-□□-27□(-M)

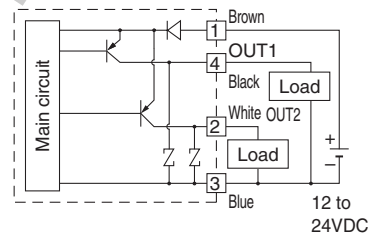



PF2W704-□□-67□(-M)

Connector pin numbers



Pin no.	Pin description
1	DC(+)
2	OUT2
3	DC(-)
4	OUT1


PF2W740

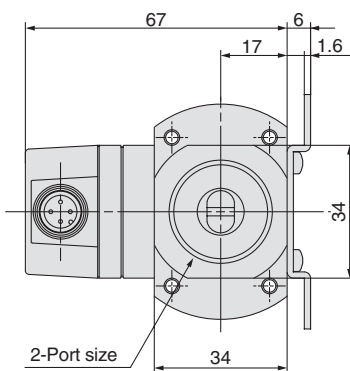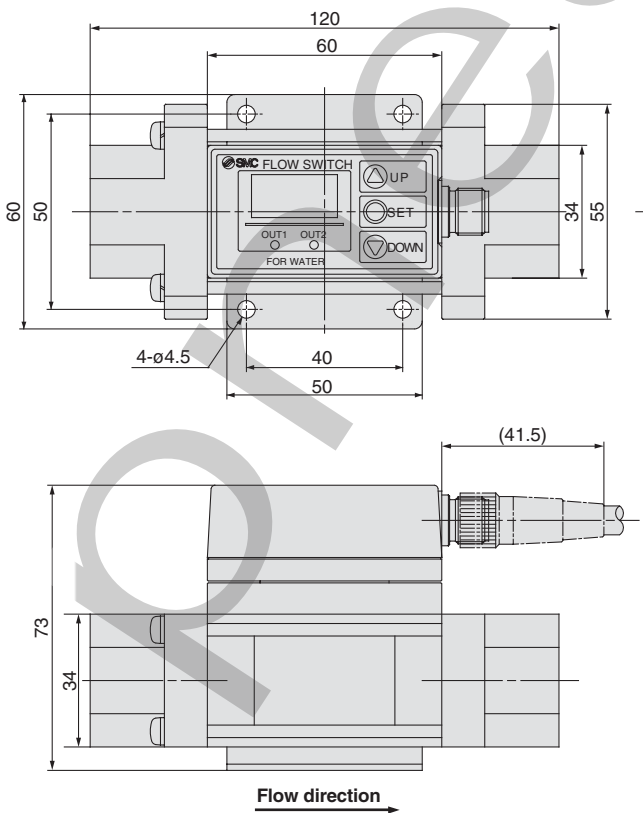

Series PF2W




Dimensions: Integrated Display Type for Water

PF2W711

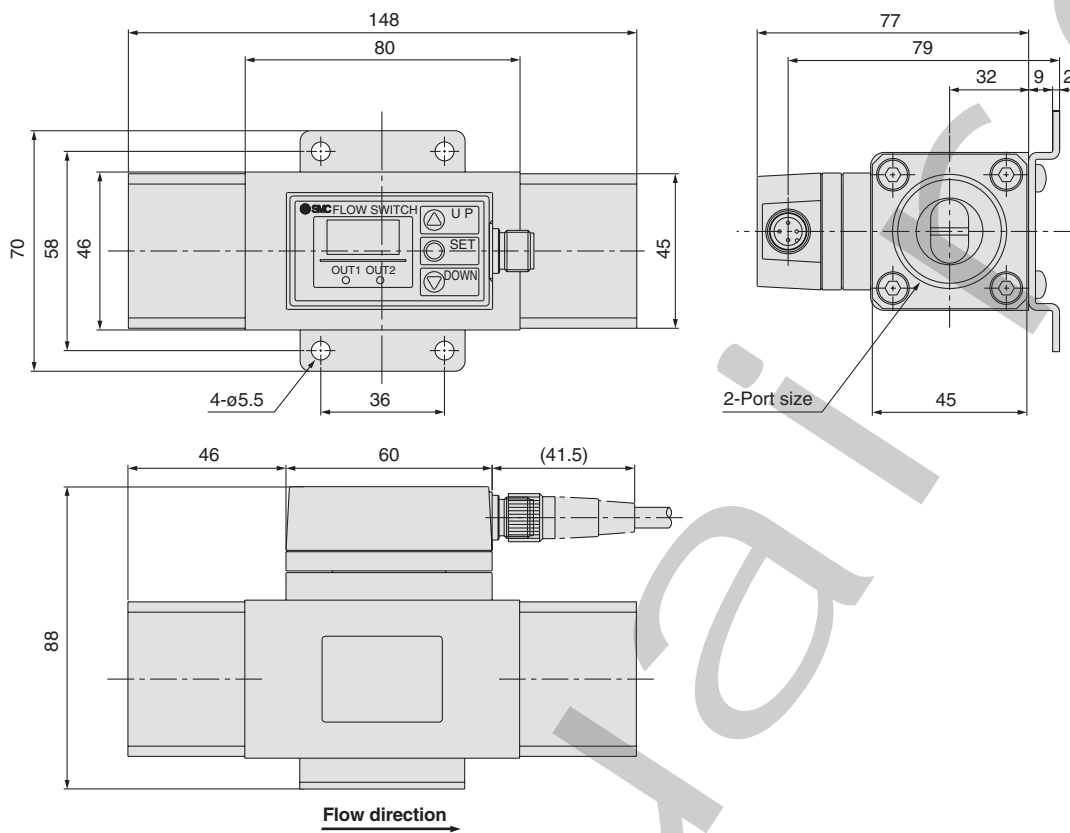

Dimensions: Remote Type Sensor Unit for Water




PF2W504, 520-□(N)-□

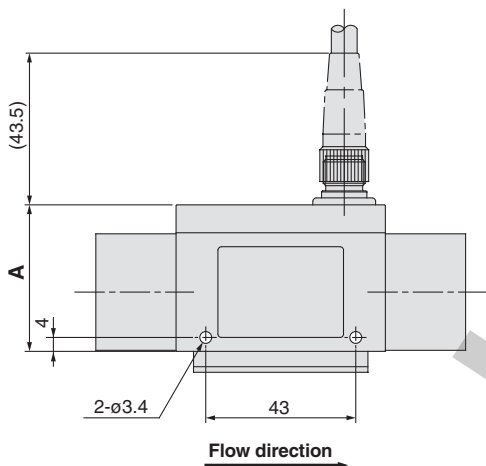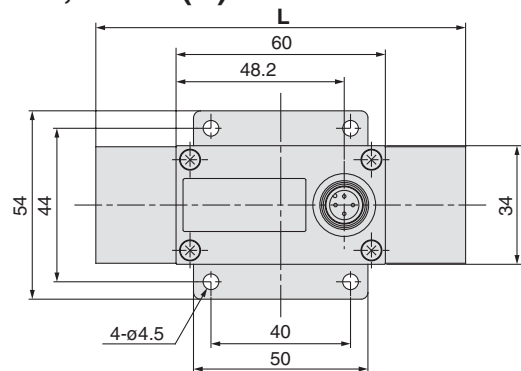

Output specification	A	B
Pulse output only	42	62
Pulse output + Analog output	52	72

Model	L dimension
PF2W504	100
PF2W520	106


PF2W504-□(N)-□

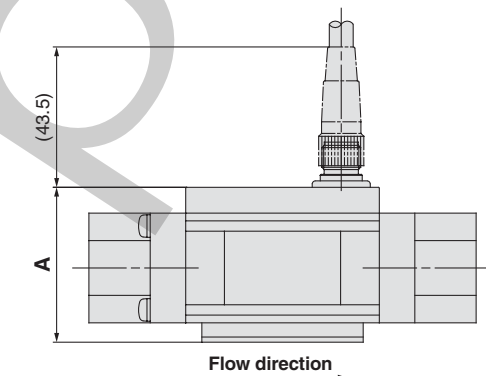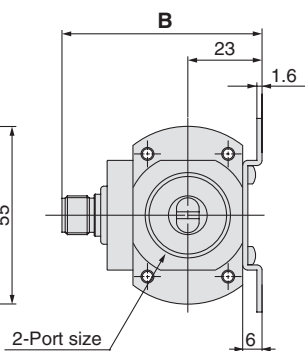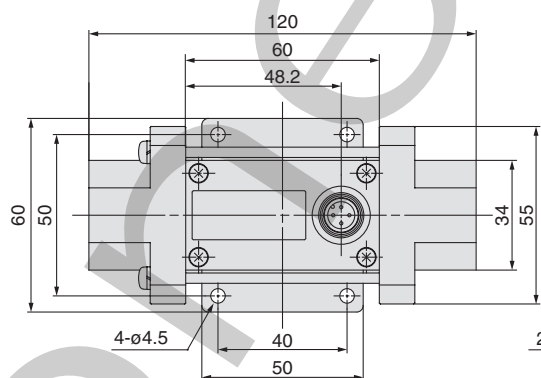


Output specification	A	B
Pulse output only	42	62
Pulse output + Analog output	52	72

Internal circuits and wiring examples


① to ⑧ are terminal numbers.

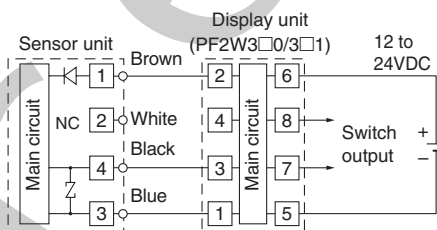

PF2W5□□-□□□

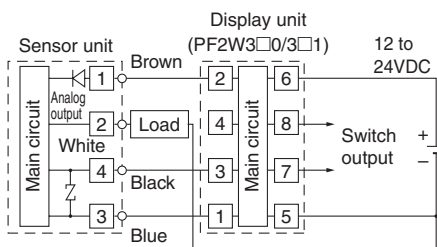


PF2W5□□-□□□-1

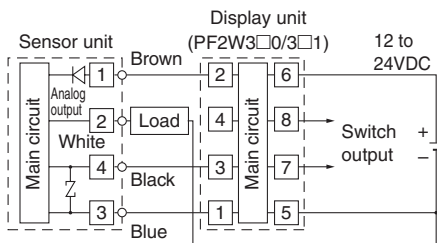


PF2W5□□-□□□-2

Wiring

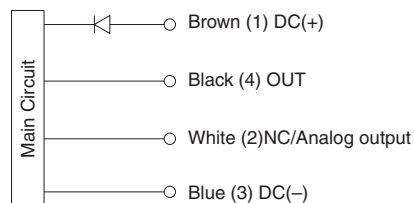

* Use this sensor by connecting to P/A remote type display unit Series PF2W3□□.

Connector pin numbers




Pin no.	Pin description
1	DC(+)
2	NC/Analog output
3	DC(-)
4	OUT

Series PF2W


Dimensions: Remote Type Sensor Unit for Water

PF2W511-□(N)-□

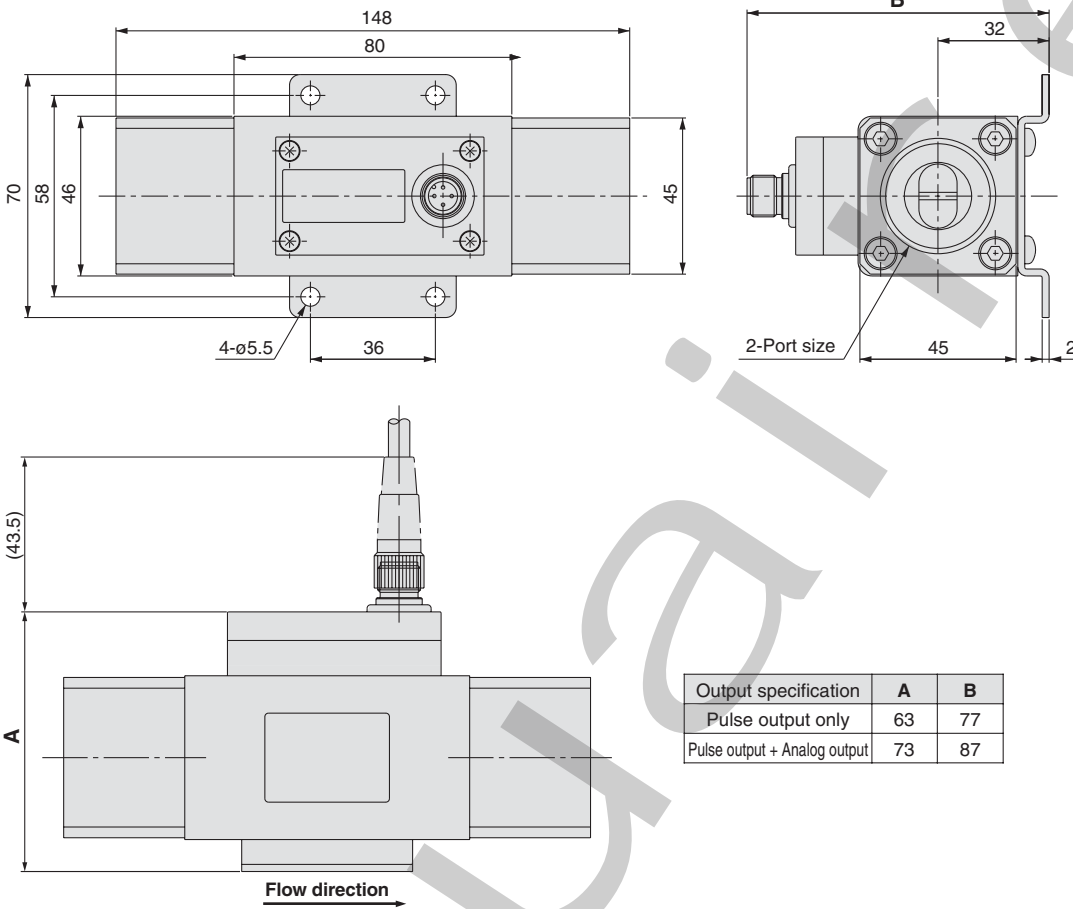


Output specification	A	B
Pulse output only	63	77
Pulse output + Analog output	73	87

Analog output 1 to 5VDC

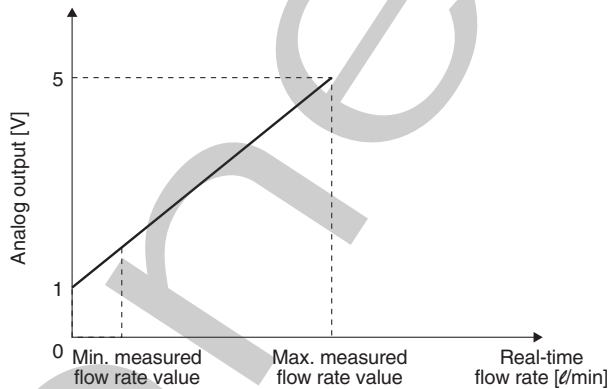

Part no.	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2W504-□-1	0.5	4
PF2W520-□-1	2	16
PF2W540-□-1	5	40
PF2W511-□-1	10	100




4 to 20mADC

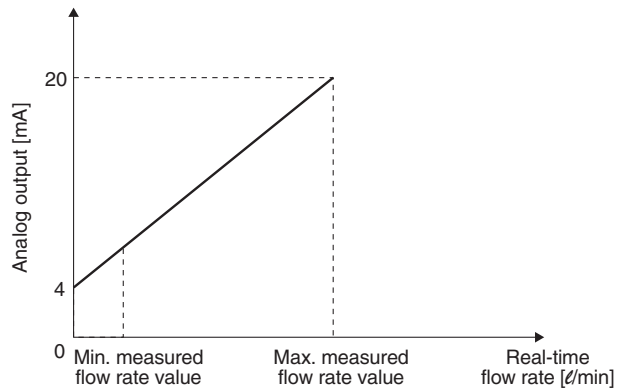

Part no.	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2W504-□-2	0.5	4
PF2W520-□-2	2	16
PF2W540-□-2	5	40
PF2W511-□-2	10	100

Dimensions: Remote Type Display Unit for Water



PF2W3□□-A
Panel mounting type

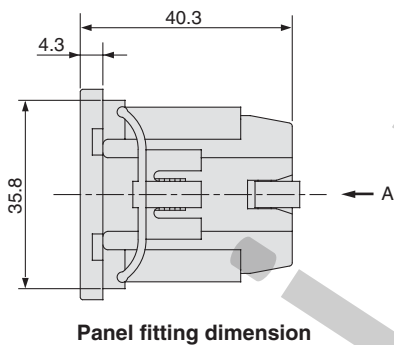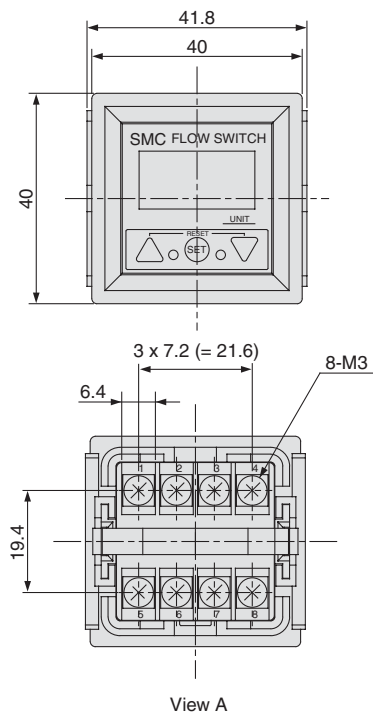

* The applicable panel thickness is 1 to 3.2mm.


Internal circuits and wiring examples

① ⑧

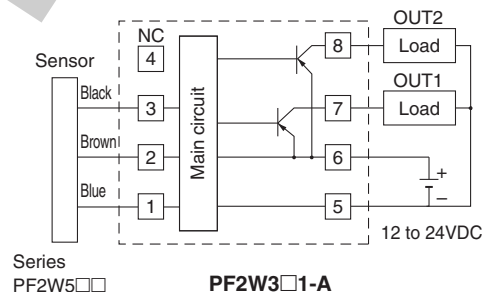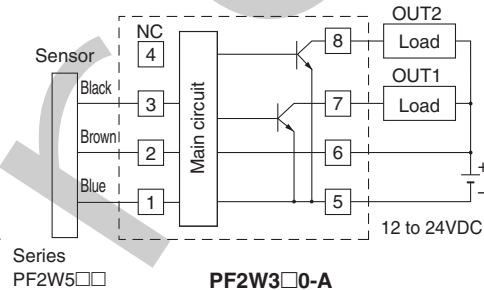

* Do not connect the white wire of the sensor to ③.

Terminal block number




For Water

Digital Flow Switch/High Temperature Fluid Type

Series PF2W

Refer to www.poweraire.com for details of products compatible with overseas standards.



How to Order

Integrated Display Type

PF2W7 20 T — 03 — 27 — —

Flow rate range

04	0.5 to 4ℓ/min
20	2 to 16ℓ/min
40	5 to 40ℓ/min

Temperature range

T	0 to 90°C
---	-----------

Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Flow rate (ℓ/min)			Applicable models
		4	16	40	
03	3/8	●	●		PF2W704T, PF2W720T
04	1/2		●	●	PF2W720T, PF2W740T
06	3/4			●	PF2W740T

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Unit specification

Nil	With unit switching function
M	Fixed SI unit (Note)

Note) Fixed units:
Real-time flow rate: ℓ/min
Accumulated flow: ℓ

Output specification

27	PNP open collector 2 outputs
67	NPN open collector 2 outputs

Specifications

Model	PF2W704T	PF2W720T	PF2W740T
Measured fluid	Water, Mixture of water (50%) and ethylene glycol (50%)		
Flow rate measurement range	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min
Set flow rate range	0.35 to 4.5ℓ/min	1.7 to 17.0ℓ/min	3.5 to 45ℓ/min
Flow rate measuring range	0.5 to 4ℓ/min	2 to 16ℓ/min	5 to 40ℓ/min
Minimum setting unit	0.05ℓ/min	0.1ℓ/min	0.5ℓ/min
Accumulated pulse flow rate exchange value (Pulse width: 50ms)	0.05ℓ/pulse	0.1ℓ/pulse	0.5ℓ/pulse
Operating fluid temperature	0 to 90°C (with no cavitation)		
Linearity	±5% F.S. or less		
Repeatability	±3% F.S. or less		
Temperature characteristics (Note 1)	±5% F.S. or less (0 to 90°C, based on 25°C)		
Current consumption (No load)	70mA or less		
Weight (Note 2)	710g		
Port size (Rc, NPT, G)	3/8	3/8, 1/2	1/2, 3/4
Detection type	Karman vortex		
Indicator light	3-digit, 7-segment LED		
Display units (Note 3)	Real-time flow rate	ℓ/min, gal(US)/min	
	Accumulated flow	ℓ, gal(US)	
Operating pressure range	0 to 1MPa		
Withstand pressure	1.5MPa		
Accumulated flow range	0 to 999999ℓ		
Output specifications (Note 4)	Switch output	NPN open collector	Maximum load current: 80mA; Internal voltage drop: 1V or less (with load current of 80mA) Maximum applied voltage: 30V; 2 outputs
		PNP open collector	Maximum load current: 80mA; Internal voltage drop: 1.5V or less (with load current of 80mA); 2 outputs
	Accumulated pulse output	NPN or PNP open collector (same as switch output)	
Status LED's	Lights up when output is ON OUT1: Green; OUT2: Red		
Response time	1 sec. or less		
Hysteresis	Hysteresis mode: Variable (can be set from 0); Window comparator mode: 3-digit fixed		
Power supply voltage	12 to 24VDC (ripple ±10% or less)		
Resistance	Enclosure	IP65	
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)	
	Withstand voltage	1000VAC for 1 min. between external terminal and case	
	Insulation resistance	50MΩ (500VDC) between external terminal and case	
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration in X, Y, Z directions for 2 hrs. each	
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each	
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns		

Note 1) ±5% F.S. or less (0 to 50°C, based on 25°C), ±3% F.S. or less (15 to 35°C, based on 25°C)

Note 2) Without lead wire.

Note 3) For digital flow switch with unit switching function. (Fixed SI unit [ℓ/min or ℓ] will be set for switch type without the unit switching function.)


Note 4) Switch output and accumulated pulse output can be selected during initial setting.

Note 5) Window comparator mode — Since hysteresis will reach 3 digits, keep P_1 and P_2 or n_1 and n_2 apart by 7 digits or more.

(In case of output OUT2, n_1, 2 to be n_3, 4 and P_1, 2 to be P_3, 4.)

Note 6) The flow switch is conformed to CE mark.

How to Order



Remote Type
Display Unit

PF2W5 **20** T — **03** —

Flow rate range

04	0.5 to 4ℓ/min
20	2 to 16ℓ/min
40	5 to 40ℓ/min

Temperature range

T	0 to 90°C
---	-----------

Thread type

Nil	Rc
N	NPT
F	G

Output specification

Nil	Output for display unit
1	Output for display unit + Analog output (1 to 5V)
2	Output for display unit + Analog output (4 to 20mA)

Wiring specification

Nil	3m lead wire with connector
N	Without lead wire

Port size

Symbol	Port size	Flow rate (ℓ/min)			Applicable models
		4	16	40	
03	3/8	●	●		PF2W504T, 520T
04	1/2		●	●	PF2W520T, 540T
06	3/4			●	PF2W540T

Specifications

Model	PF2W504T	PF2W520T	PF2W540T
Measured fluid	Water, Mixture of water (50%) and ethylene glycol (50%)		
Detection type	Karman vortex		
Flow rate measuring range	0.5 to 4ℓ/min	2 to 16ℓ/min	5 to 40ℓ/min
Operating pressure range	0 to 1MPa		
Withstand pressure	1.5MPa		
Operating fluid temperature	0 to 90°C (with no cavitation)		
Linearity ^{Note 1)}	±5% F.S. or less		
Repeatability ^{Note 1)}	±2% F.S. or less		
Temperature characteristics	±2% F.S. or less (15 to 35°C based on 25°C), ±3% F.S. or less (0 to 50°C based on 25°C)		
Output specifications ^{Note 2)}	Output for display unit	Pulse output, N channel, open drain, output for display unit PF2W3□□. (Specifications: Maximum load current of 10mA; Maximum applied voltage of 30V)	
	Analog output	Voltage output 1 to 5V within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 100kΩ or more. Current output 4 to 20mA within the flow rate range Linearity: ±5% F.S. or less; allowable load resistance: 300Ω or less with 12VDC, 600Ω or less with 24VDC	
Power supply voltage	12 to 24VDC (ripple ±10% or less)		
Current consumption (No load)	20mA or less		
Resistance	Enclosure	IP65	
	Operating temperature range	Operating: 0 to 50°C, Stored: -25 to 85°C (with no condensation and freezing)	
	Withstand voltage	1000VAC for 1 min. between external terminal and case	
	Insulation resistance	50MΩ (500VDC) between external terminal and case	
	Vibration resistance	10 to 500Hz at whichever is smaller: 1.5mm amplitude or 98m/s ² acceleration in X, Y, Z directions for 2 hrs. each	
	Impact resistance	490m/s ² in X, Y, Z directions 3 times each	
Noise resistance	1000Vp-p, Pulse width 1μs, Rise time 1ns		
Weight ^{Note 3)}	660g		
Port size (Rc, NPT, G)	3/8	3/8, 1/2	1/2, 3/4

Note 1) The system accuracy when combined with PF2W3□□.

Note 2) Output system can be selected during initial setting.

Note 3) Without lead wire. (Add 20g for the types of analog output whether voltage or current output selected.)

Note 4) The sensor units conformed to CE mark.




Display units are the same as those of remote type digital flow switch for water (series PF2W3□□).
Refer to page 14 for details.


Series PF2W

Flow Characteristics (Pressure Loss)


PF2W704T,504T

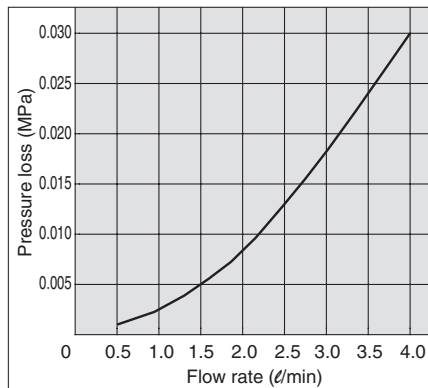


PF2W720T,520T

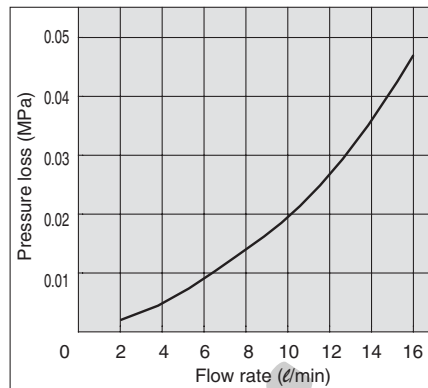

PF2W740T,540T

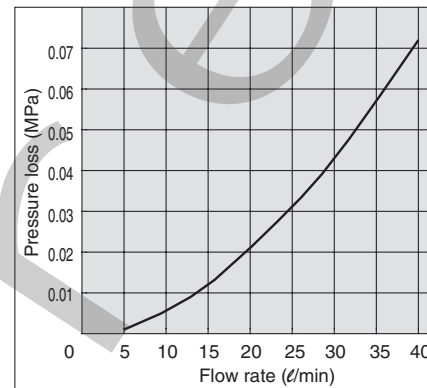

Sensor Unit Construction

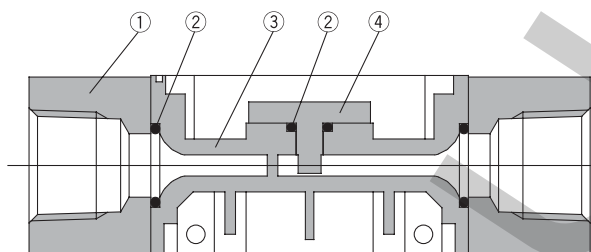


Parts list

No.	Description	Material
1	Attachment	Stainless steel
2	Seal	FKM
3	Body	PPS
4	Sensor	PPS




Connectors and operating unit descriptions are the same as series PF2A for air. Refer to page 5.

Dimensions: Integrated Display Type for Water

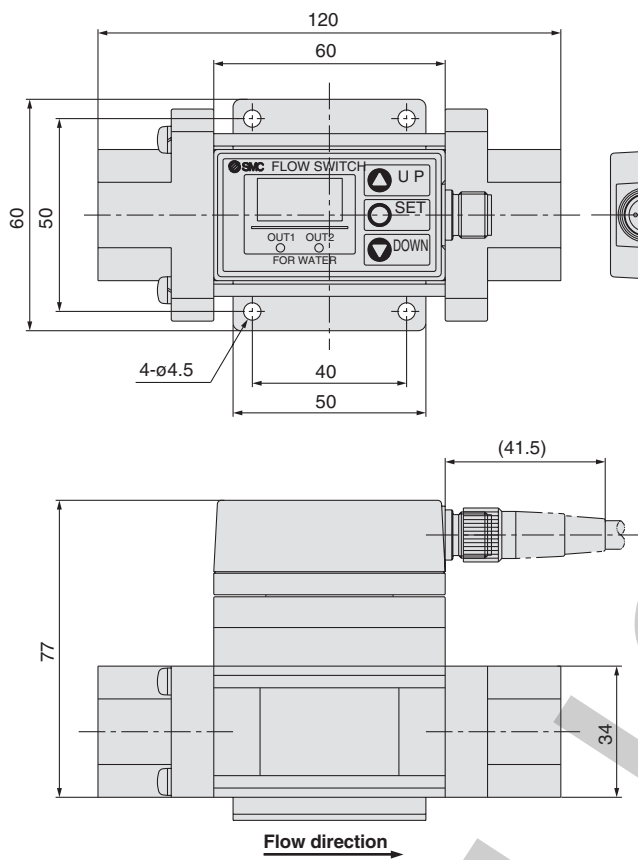


Internal circuits and wiring examples

① to ④ are terminal numbers.

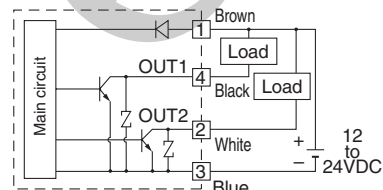


PF2W7□□T-□□-27□(-M)

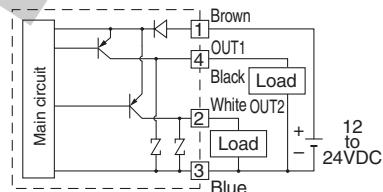

PF2W7□□T-□□-67□(-M)

Connector pin numbers





Pin no.	Pin description
1	DC(+)
2	OUT2
3	DC(-)
4	OUT1

Series PF2W


Dimensions: Remote Type Sensor Unit for Water

PF2W504T, 520T, 540T-□(N)

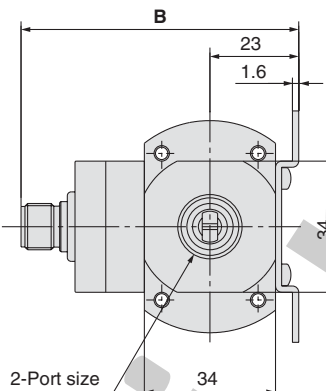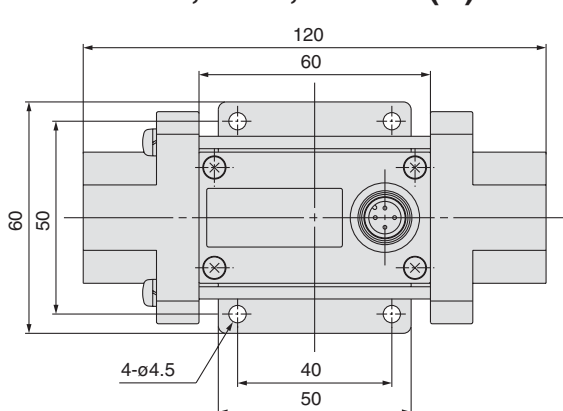


Internal circuits and wiring examples


① to ⑧ are terminal numbers.

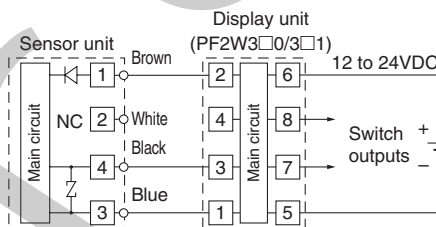

PF2W5□□T-□□□

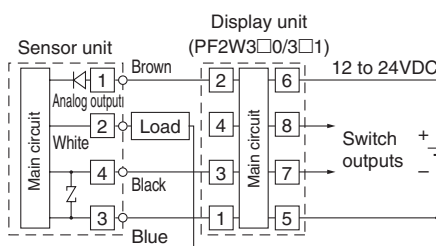


PF2W5□□T-□□□-1

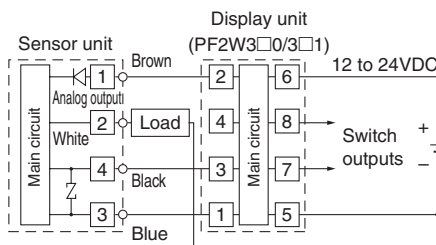


PF2W5□□T-□□□-2


Output specification	A	B
Pulse output only	52	72
Pulse output + Analog output	62	82

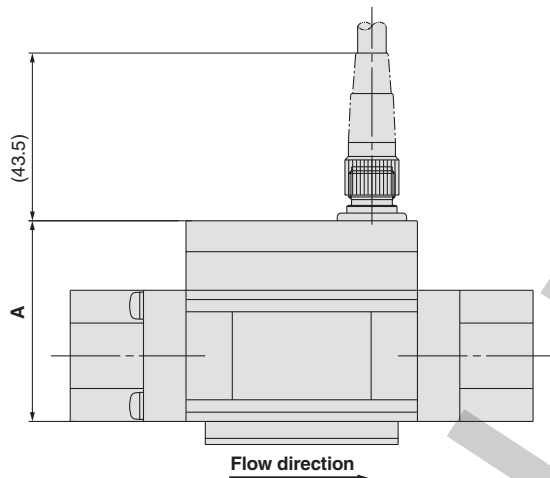

Analog output 1 to 5VDC

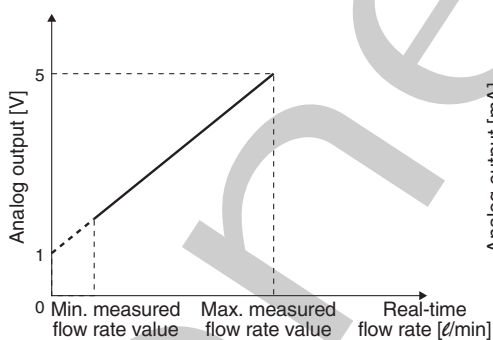


4 to 20mADC

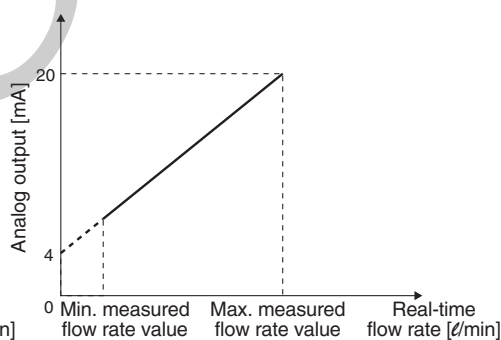

Part no.	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2W504T-□-1	0.5	4
PF2W520T-□-1	2	16
PF2W540T-□-1	5	40


Part no.	Minimum measured flow rate value [l/min]	Maximum measured flow rate value [l/min]
PF2W504T-□-2	0.5	4
PF2W520T-□-2	2	16
PF2W540T-□-2	5	40

Wiring

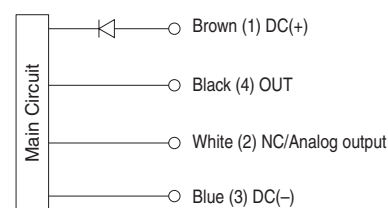

* Use this sensor by connecting to P/A remote type display unit Series PF2W3□□.

Connector pin numbers



Pin no.	Pin description
1	DC(+)
2	NC/Analog output
3	DC(-)
4	OUT

Refer to PF2W3□□ on page 20 for dimensions of remote type display unit.

Functions/PF2A, PF2W

Refer to the operation manual how to set and to operate.

Flow rate measurement selection

Real-time flow rate and accumulated flow rate can be selected. Up to 999999 of flow rate value can be accumulated.

Unit switching

For air

Display	Real-time flow rate	Accumulated flow
U_1	ℓ/min	ℓ
U_2	CFM x 10 ⁻² , CFM x 10 ⁻¹	ft ³ x 10 ⁻¹

CFM=ft³/min

High Flow Rate Type (For Air)

Display	Real-time flow rate	Accumulated flow
U_1	ℓ/min	ℓ, m ³ , m ³ x 10 ³
U_2	CFM	ft ³ , ft ³ x 10 ³ , ft ³ x 10 ⁶

For Water / High Temperature Fluid Type (For Water)

Display	Real-time flow rate	Accumulated flow
U_1	ℓ/min	ℓ
U_2	GPM	gal (US)

GPM=gal (US)/min

Note) Fixed SI unit [ℓ/min or ℓ] will be set for the type without the unit switching function.

Flow rate conversion

Basic state: 0°C, 101.3kPa

Standard state: 20°C, 101.3kPa, 65%RH (ANR)

Switchable between these states.

Flow rate measuring unit confirmation

This function allows to confirm the accumulated flow rate when real-time flow rate is selected and to confirm the real-time flow rate when accumulated flow rate is selected.

Error Correction

LED display	Contents	Solution
Er1 <small>Note 1)</small>	A current of more than 80mA is flowing to OUT1.	Check the load and wiring for OUT1.
Err_1 <small>Note 2)</small>		
Er2 <small>Note 1)</small>	A current of more than 80mA is flowing to OUT2.	Check the load and wiring for OUT2.
Err_3 <small>Note 2)</small>	The setting data has changed for whatever reasons.	Perform the RESET operation, and reset all data again.
Er4 <small>Note 1)</small>		
--- <small>Note 1)</small>	The flow rate is over the flow rate measurement range (for air only).	Reduce the flow rate until it is within the flow rate measurement range, using an adjustment valve.
---- <small>Note 2)</small>		

Note 1) Applicable for all integrated display types other than series PF2A7□□H and remote type sensor display units.

Note 2) Only for series PF2A7□□H.

Key lock

This function prevents incorrect operations such as changing the set value accidentally.

Accumulation clearance

This is to clear the accumulated value.


Initialization of setting (only for series PF2A7□□H)

This is to restore the setting to the initial state when dispatched from the factory.


Output types

Real-time switch output, accumulated switch output, or accumulated pulse output can be selected as an output type.

Real-time switch output (OUT1, 2)

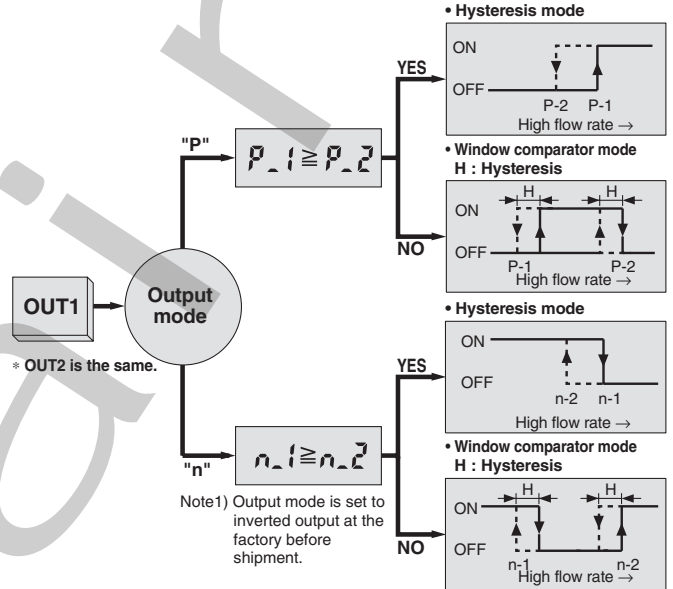


Accumulated switch output (OUT1, 2)

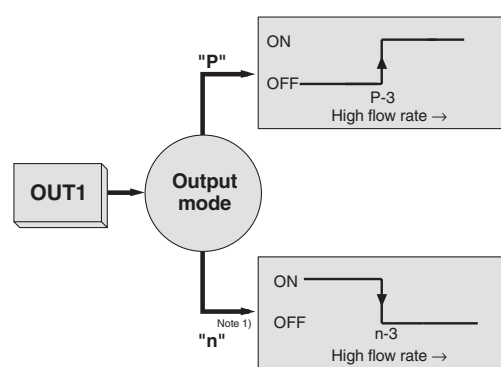

Note 1) Output mode is set to inverted output at the factory before shipment.

Accumulated pulse output (OUT1, 2)

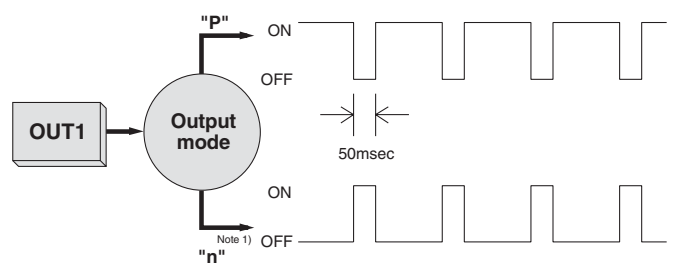

Note 1) For digital flow switch with unit switching function. (Fixed SI unit [ℓ/min, or ℓ, m³ or m³ x 10³] will be set for switch types without unit switching function.) Refer to the specifications of display unit for the flow rate value per pulse.