


INFORMATION *New!*

Double Layer Tubing Stripper Series TKS

Allows easy stripping of the outer layer from double layer tubing.


Able to strip without damaging the inner tubing

The outer tubing can be stripped without damaging the inner tubing because a pawl is inserted between the inner and outer tubing layers.

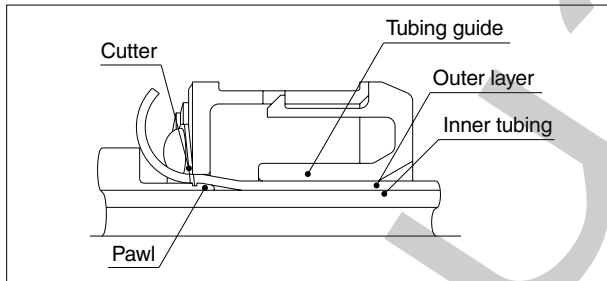

Can be attached to tools

Stripping work can be automated by attaching to an air driver, etc.

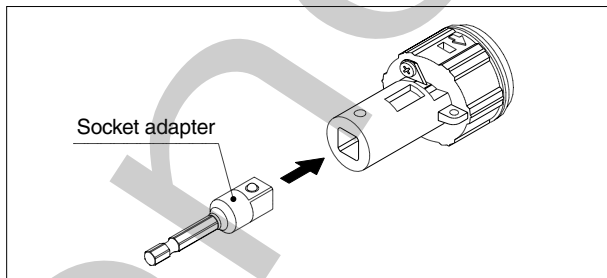

⚠ Caution


Do not use to strip covering materials from electrical wires, etc.

Adjustment of cutter and stripping length is unnecessary

A constant stripping length is always possible due to the fixed cutter with angle that cuts until the tubing reaches the end surface inside the stripper.

Removal of stripped tubing is unnecessary

Since the stripped tubing is discharged to the outside, no additional labor is required to remove it.

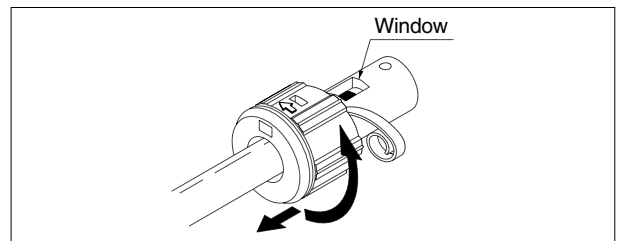

- Even double layer polyurethane tubing (series TRBU) which is highly adhesive to the external layer can be stripped easily.

Variations

Model	Tip color	Applicable tubing *	Dimensions mm			Weight g
			D1	D2	L	
TKS-06	Orange	TRB0604, TRBU0604	35	16	58	45
TKS-08	Yellow	TRB0806, TRBU0805		18		
TKS-10	Blue	TRB1075, TRBU1065		20	62	50
TKS-12	Green	TRB1209, TRBU1208	22			

* Inner tubing material/TRB: Nylon, TRBU: Polyurethane

