

- O Service life/Paint: 2 to 5 million cycles (depending on the type of paint) Air, Water, Butyl acetate: 10 million cycles (for cleaning/blowing)
- Reduction of the paint deposit (dead space of the valve element parts is
  0.01cc or less) \*1/20 less than the previous model
- Valve can be replaced without touching the piping.

## Series VCC





## Space-saving/Robot arm mountable

- Compact, space-saving centralized piping 2/3 port valves and cleaning unit are mounted together.
- 2 valves are mountable per station.

# • Service life/Paint: 2 to 5 million cycles (depending on the type of paint)

Air, Water, Butyl acetate: 10 million cycles (for cleaning,

- Operating pressure: 0 to 1.0 MPa, Withstand pressure: 1.2 MPa Failure prediction function installed (Leakage detection port, Switch
- Complete separation of paint and pilot air (prevents mixing at the time of a
- failure)

## High cleaning efficiency

 Reduction of the paint deposit \*1/20 less than the previous model (Dead space of the valve element parts is 0.01 cc or less.)

#### Maintenance performance is improved. Valve can be replaced without touching the piping.

Stacking manifold base enables the station to increase or decrease.


coming


soonl

- (Dead space between the bases is 0.01 cc or less.)


#### Cartridge

Single valve unit can be mounted anywhere.





#### **Manifold Example**

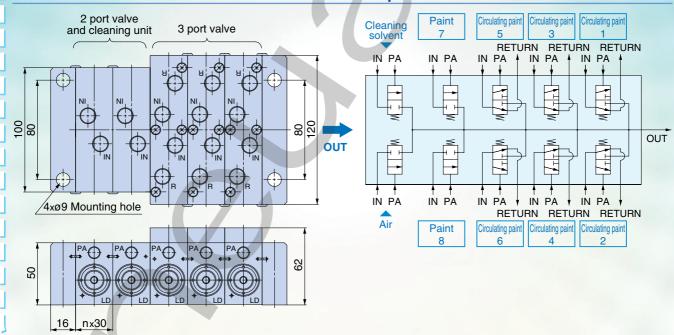

#### Specifications

Construction	Poppet seal (Special resin + Stainless steel) + Special PTFE for sliding parts
Operating fluid	Aqueous/Solvent paint, Ink, Cleaning solvent (Water, Butyl acetate), Air
Operating pressure range	0 to 1.0 MPa
Withstand pressure	1.2 MPa
Pilot pressure	0.4 to 0.7 MPa
Orifice diameter/Effective area	ø3.8 / 6mm²
Ambient and fluid temperature	5 to 50°C





#### POWER OAIRE